

SMT Power Inductors

Power Beads - 2 - Phase Coupled Inductors for Notebook Vcore



- Halogen Free
- For use only with Volterra VT13xx chipset
- Height:** 4.0mm Max
- Footprint:** 11.8mm x 11.4mm Max (PA2143NL)
9.9mm x 10.0mm Max (PA2156NL)

Electrical Specifications @ 25°C — Operating Temperature - 40°C to +130°C⁷

Part Number	Leakage ¹ Inductance (nH ±20%)	Irated/Phase ³ (Adc)	Open Circuit ² Inductance (Lm+Lk)		Coupling ² Ratio (TYP)	DCR/Phase (mW Nom)		Saturation Current ⁴ (Adc @25°C)		Heating Current ⁵ per Phase (Adc)
			(1-4)	(2-3)		(1-4)	(2-3)	2*Lk	Lm+Lk	
PA2143NL - 11.8mm x 11.4mm x 4.0mm MAX										
PA2143NL	50	31	200	200	3	.26±10%		>40	18	35
PA2156NL - 9.9mm x 10.0mm x 4.0mm MAX										
PA2156NL	50	31	240	240	4	.36±13%		>40	9	28


NOTES:

- The leakage inductance (L_k) is equivalent to the phase inductance in a non-coupled design. The leakage inductance represents the actual inductance that would be required in an non-coupled design to achieve the same transient performance. Only the value of 2*L_k (ie: series leakage inductance) can be measured directly. The value of 2*L_k is measured between pins (1-2) with (4,3) shorted.
- The open circuit inductance (L_m+L_k) can be measured directly on either pins (1-4) or pins (2-3). The value of L_m/L_k defines the coupling ratio.
- The I_{rated}/phase represents the DC current per phase that the coupled inductor can tolerate (with a 5Adc/phase imbalance) before saturating.
- The heating current (I_{dc}) is the DC current required to raise the component temperature by approximately 40C. The components performance varies depending on the system conditions.
- In high volt*time applications, additional heating in the component can occur due to core losses in the inductor which may necessitate derating the current in order to limit the temperature rise of the component. To determine the approximate total losses (or temperature rise) for a given application, the coreloss and temperature rise curves can be used.
- The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
- Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA2143NL becomes PA2143NLT). Pulse complies with industry standard tape and reel specification EIA481. The tape and reel for this product has a width (W=24mm), pitch (Po=16mm) and depth (Ko=4.1mm)

Mechanicals


Schematics

PA2143NL

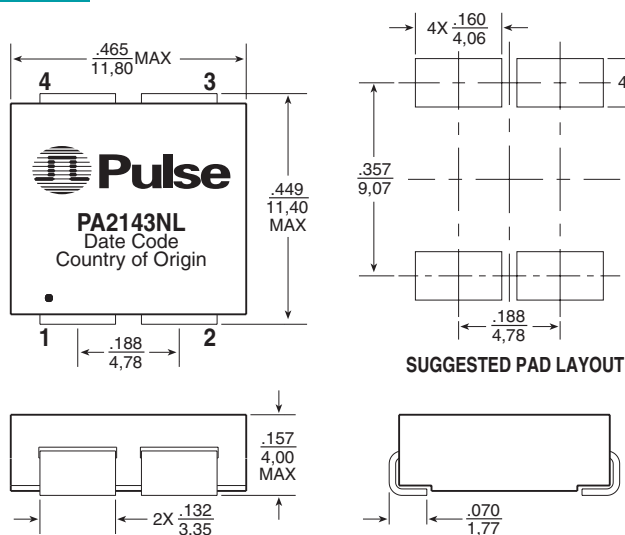


Weight 2.1 grams
 Tape & Reel 1000/reel
 Dimensions: Inches _____
 mm _____
 Unless otherwise specified, all tolerances
 are ± .010
 0,25

COMPONENT



APPLICATION



USA 215 781 6400

Germany 49 7032 7806 0

Singapore 65 6287 8998

Shanghai 86 21 62787060



China 86 755 33966678

Taiwan 886 3 4356768

Mechanicals

Schematics

PA2156NL

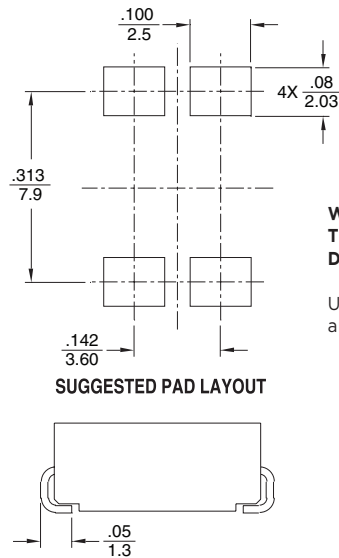
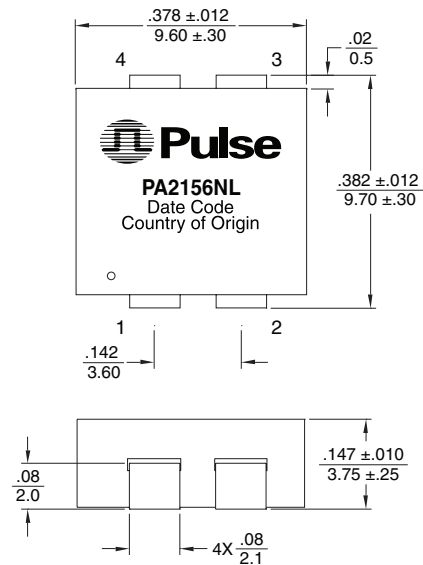


Weight2.1 grams

Tape & Reel 1000/reel




Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances
are $\pm .010$
0,25



SMT Power Inductors

Power Beads - 2 - Phase Coupled Inductors for Notebook Vcore

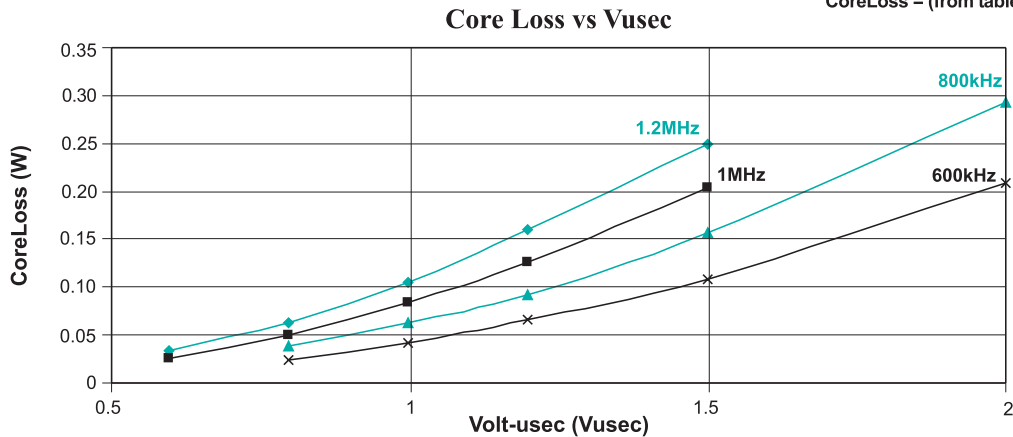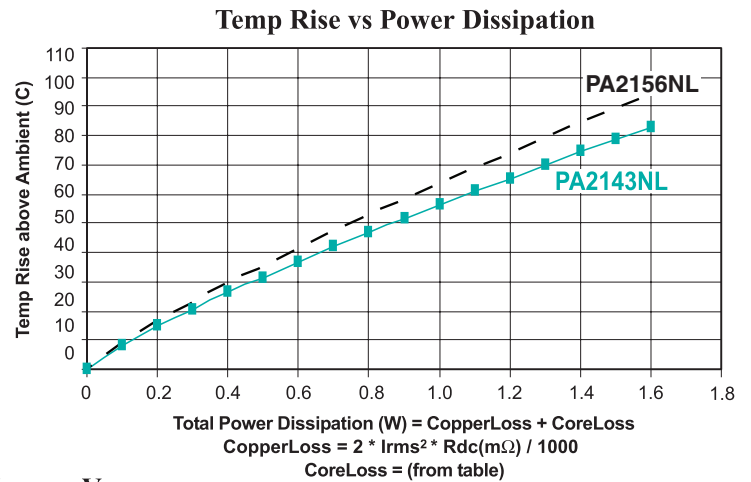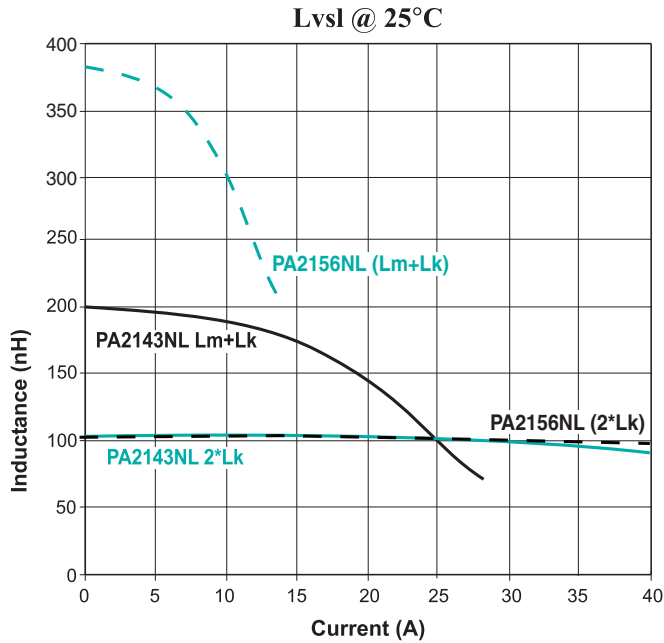

For More Information

Pulse Worldwide Headquarters
 12220 World Trade Dr.
 San Diego, CA 92128
 U.S.A.

Tel: 858 674 8100
 Fax: 858 674 8262

Pulse Europe
 Einsteinstrasse 1
 D-71083 Herrenberg
 Germany

Tel: 49 7032 7806 0
 Fax: 49 7032 7806 135

Pulse China Headquarters
 B402, Shenzhen Academy of
 Aerospace Technology Bldg.
 10th Kejian Road
 High-Tech Zone
 Nanshan District
 Shenzhen, PR China 518057
 Tel: 86 755 33966678
 Fax: 86 755 33966700

Pulse North China
 Room 2704/2705
 Super Ocean Finance Ctr.
 2067 Yan An Road West
 Shanghai 200336
 China
 Tel: 86 21 62787060
 Fax: 86 2162786973

Pulse South Asia
 135 Joo Seng Road
 #03-02
 PM Industrial Bldg.
 Singapore 368363
 Tel: 65 6287 8998
 Fax: 65 6287 8998

Pulse North Asia
 3F, No. 198
 Zhongyuan Road
 Zhongli City
 Taoyuan County 320
 Taiwan R. O. C.
 Tel: 886 3 4356768
 Fax: 886 3 4356823 (Pulse)
 Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2011. Pulse Electronics, Inc. All rights reserved.