

Cool Operator 32 Single Standard Compact Electronic Ballast FOR SINGLE LAMP 32 or 26 WATTS

Description: Electronic Ballast for four pin applications for 32 or 26 Watts. Use with GE Double and Triple Biax, OSRAM, Dulux D/E and Dulux T/E, Philips PL-C and PL-T Rapid Start Lamps

- Rapid Start

- High Power Factor

Model #	Voltage	No. of Lamps	Lamp Watts	Input Watts (AVG.)	Input Current (MAX.)	Power Factor	Ballast Factor	THD	Bench Heat Test at 23°C Ambient Temp.	Crest Factor
CSS-132P or CSS-132PBM/REVB (Bottom Mount)	120	1	32W	34W	0.28	>98	.90	<10	50°C	<1.7
	120	1	26W	29W	0.28	>98	.94	<10	49°C	<1.7




Performance:


- End of Lamp Life Protection Circuit
- Rating: Type 1 Outdoor
- Remote Wiring: 25 ft.
- IR Interference: None

Application:

- Minimum Starting Temperature to -18°C
- Allowed Maximum Case Temperature 75°C (Full warranty)
- Sound Rated A
- Leads add to model #: BM - Bottom Mount with Studs

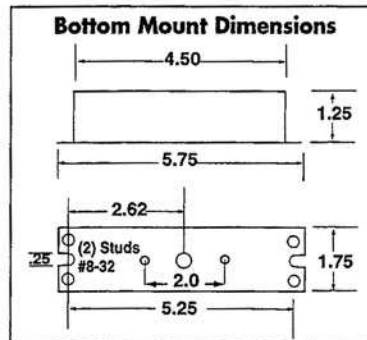

Ballast Case must be grounded. Install in accordance with the National Electrical Code.

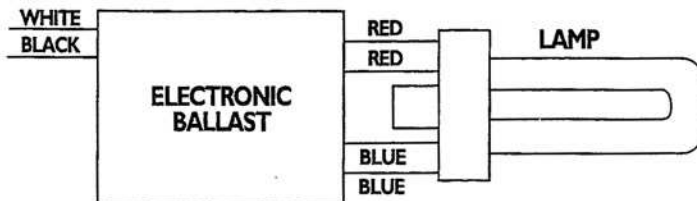

Safety

- No PCB's
- UL Listed
- CUL Certified
- Class P Thermally Protected (Inherent)
- Surge Protected, Meets ANSI C62.41
- EMI/RFI: Meets FCC Part 18 Subpart E
- **Carrier Guard™ Protection for Powerline Carrier Signals**

Physical Parameters

- Length: 5.75"
- Width: 1.75"
- Height: 1.25"
- Weight: .71 oz.
- Mounting -
 - Hole Width: .25"
 - Hole Length: 5.25"
- Lead Length: White, Black 8.5"
- Side Exit: Red, Blue 7.5"
- Bottom Exit: White, Black 7.5"
- Red, Blue 5.5"
- Qty/Carton: 50 pcs.

10/14/11