

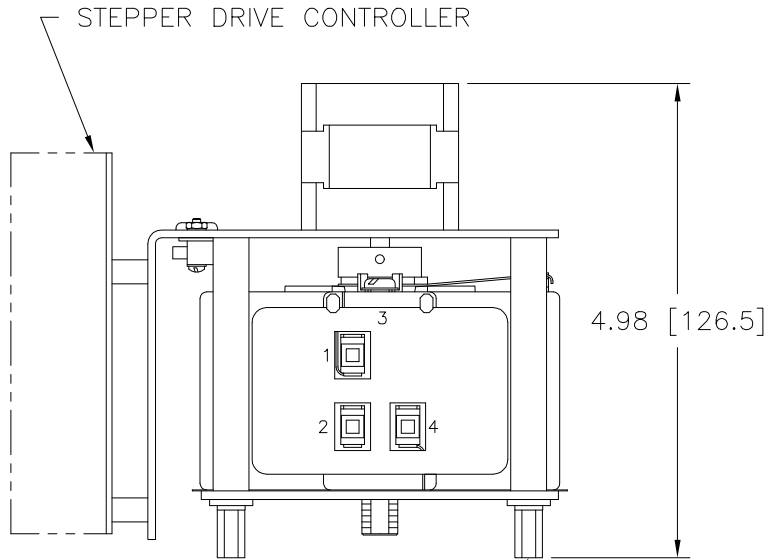


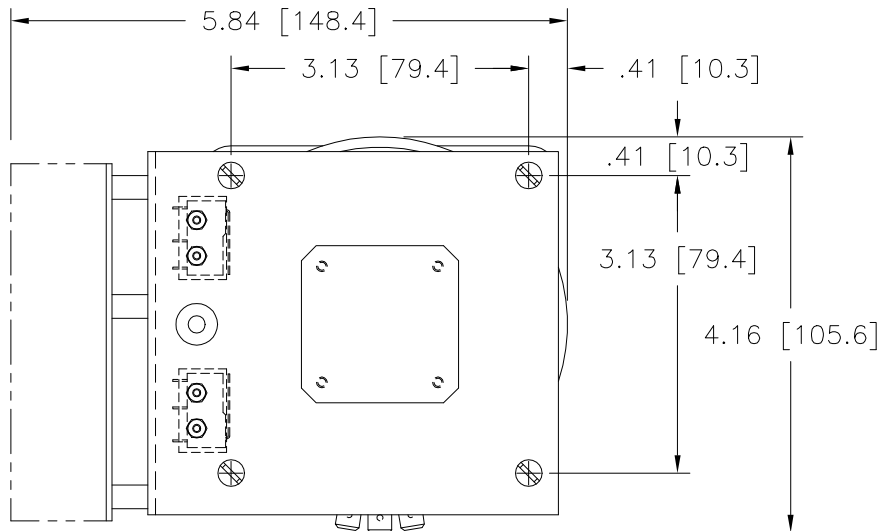

#8-32 X .34 [8.7] DEEP
THREADS (4) PLACES
FOR CUSTOMER MOUNTING

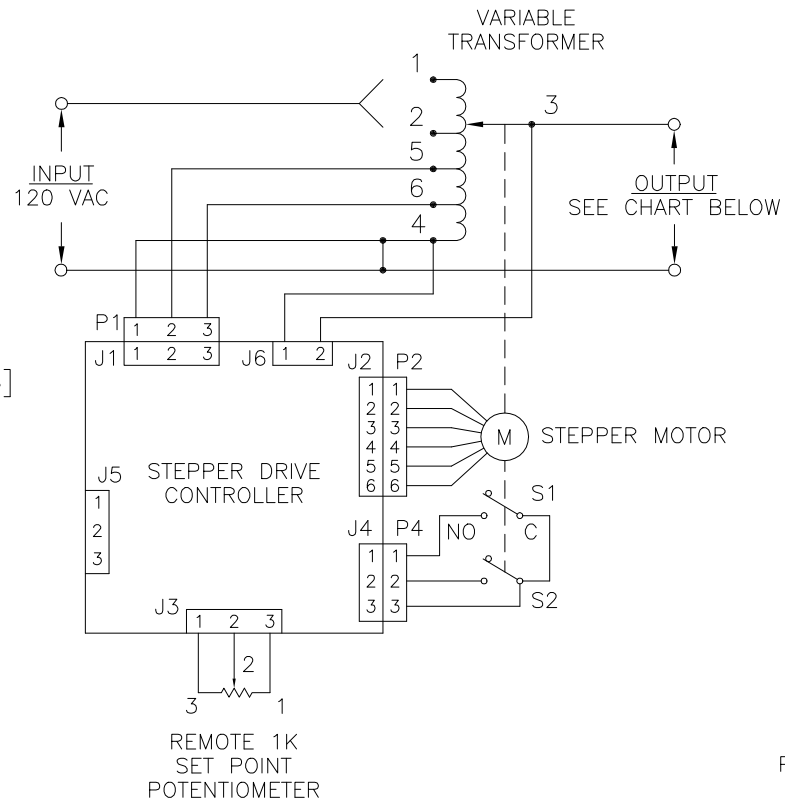

SET POINT ADJUSTMENT:

THE OUTPUT SET POINT MAY BE ADJUSTED WITH THE REMOTE 1K POTENTIOMETER PROVIDED OR WITH A 0-5 VDC SIGNAL TO THE J3 CONNECTOR ON THE STEPPER DRIVE CONTROL. MAKE CONNECTIONS TO J3-2(+) & J3-3(-). A NOMINAL +5 VDC SETPOINT SUPPLY IS AVAILABLE AT J3-1 (ADJUSTABLE AT TRIMPOT R22).

DWG. SIZE	DWG. NO.		
C	095-1802		
REVISIONS			
SYM.	E.C.N.	DATE	APVD.
A	24028	8/10/99	CLARIFIED 5VDC NOTE

SPECIFICATIONS											
WIRING	INPUT		OUTPUT				TERMINAL CONNECTIONS				
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD					
				MAX. AMPS	MAX. KVA	MAX. AMPS	MAX. KVA				
				INPUT	OUTPUT						
SINGLE PHASE	120	50/60	0-120	5.0	0.60	7.0	0.84	4-1	4-3		
			0-140	5.0	0.70	-	-	4-2	4-3		
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ±			TITLE: SPEC. CONTROL DRAWING STEPPER DRIVEN VARIABLE TRANSFORMER MODEL SD511				 A COMPONENTS CORPORATION OF AMERICA COMPANY DAYTON, OHIO U.S.A.				
DECIMALS .03 .002		HOLES .03 .002							DRAFT 1-1/2°		
ANGLES 1°		ALL DIMENSIONS APPLY AFTER PLATING									
MATERIAL :											
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.			DRAWN BY S.A. SMITH		DATE 2/29/96		FIRST USED ON		DO NOT SCALE DWG.		
			CHECKER		DATE		WEIGHT APPROX.		CODE IDENT. NO. 83008		
			ENGINEER		DATE		SCALE 1=1		SHEET 1 OF 1		
			CUSTOMER APPROVAL		DATE		DWG. NO. 095-1802		SIZE C		

