

# CSM2N-17

## Low Cost High IP3 Mixer for Next Generation Base Station/Repeater Applications (2.5 & 3G)

Rev. V3


### Features

- RF 1900 to 2200 MHz
- LO 1500 to 2200 MHz
- IF 160 to 390 MHz
- LO Drive +17 dBm (nominal)
- High Intercept +32 dBm (typ)
- +260°C Reflow Compatible

### Description

The CSM2N-17 is a double balanced mixer, designed for use in the high volume wireless applications. The design utilizes Schottky ring quad diodes and broadband baluns to attain excellent performance.

### Product Image

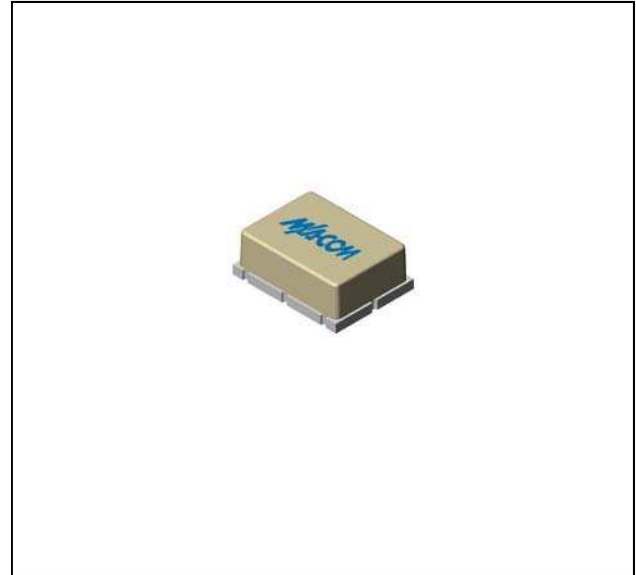

### Ordering Information


Part Number	Package
CSM2N-17	Surface Mount

### Electrical Specifications: $Z_0 = 50\Omega$ $Lo = +17$ dBm (Downconverter application only)


Parameter	Test Conditions	Units	Typical	Guaranteed	
				+25°C	-40° to +85°C
SSB Conversion Loss (max)	fR = 1.9 GHz to 2.2 GHz, fL = 1.52 to 2.01 GHz, fl = 190 to 380 MHz	dB	7.3 dB	8.0	8.5
SSB Noise Figure		dB	Within 1 dB of conversion loss		
L - R Isolation (min)	fL = 1.5 to 2.2 GHz	dB	43	40	38
L - I Isolation (min)	fL = 1.5 to 2.2 GHz	dB	39	35	33
1 dB Conversion Comp.	fL = +17 dBm	dBm	+10		
Input IP3	fR1 = 1.73 to 1.79 GHz, fR2 = 1.92 to 1.98 GHz, fL = 190 MHz	dBm	+32	+30	
R-Port VSWR	fR = 1.9 to 2.2 GHz		1.4:1		
L-Port VSWR	fL = 1.5 to 2.2 GHz		1.8:1		
I-Port VSWR	fl = 160 to 390 MHz		1.2:1		

### Typical Performance Curves


Conversion Loss vs. RF-Frequency

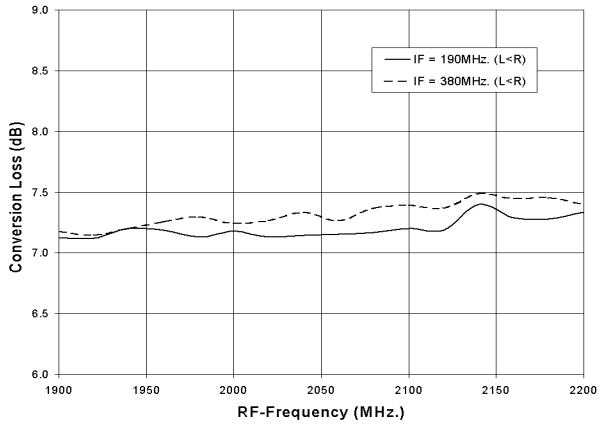


Third Order Intercept Point vs. RF-Frequency

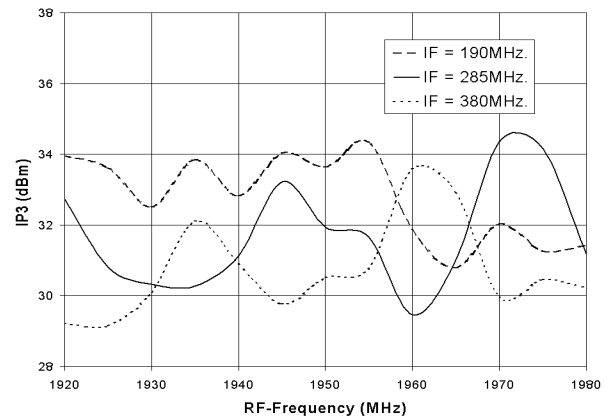


Isolation vs. LO-Frequency

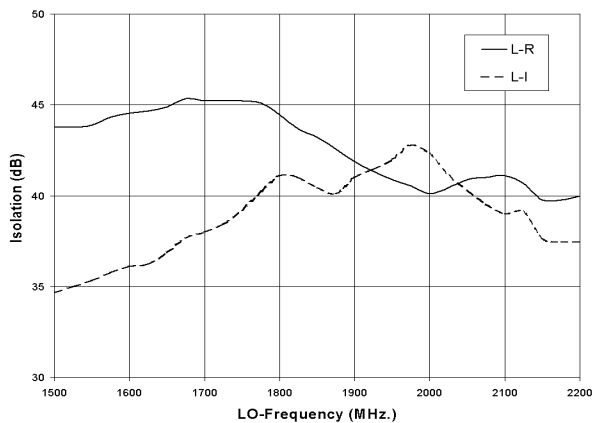


CSM2N-17: IF-Port VSWR  
P<sub>LO</sub>=+17dBm, f<sub>LO</sub>=1760MHz.

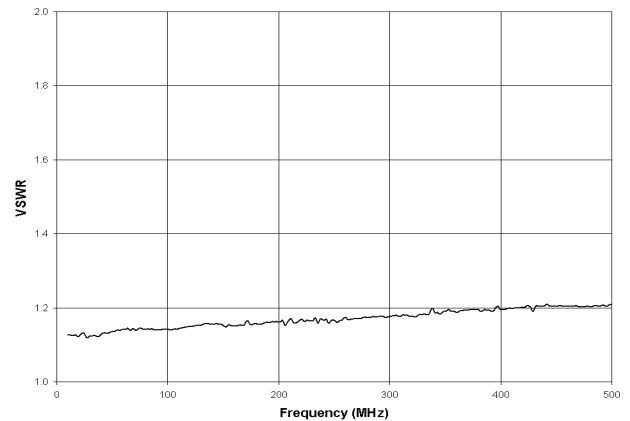


CSM2N-17: LO-Port VSWR  
P<sub>LO</sub>=+17dBm

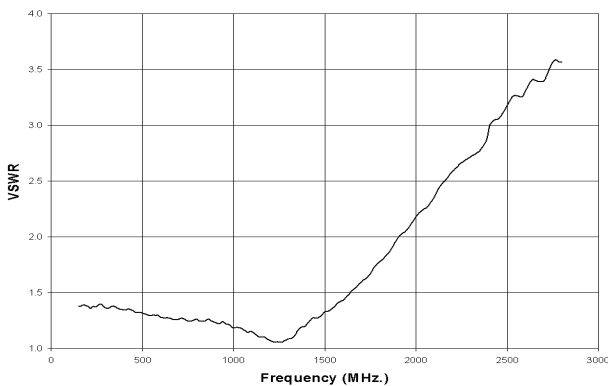

CSM2N-17: RF-Port VSWR  
P<sub>LO</sub>=+17dBm, f<sub>LO</sub>=1760MHz.

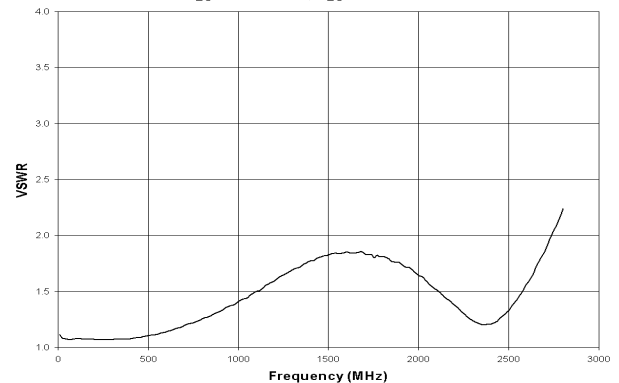

## Outline Drawing: Surface Mount \*

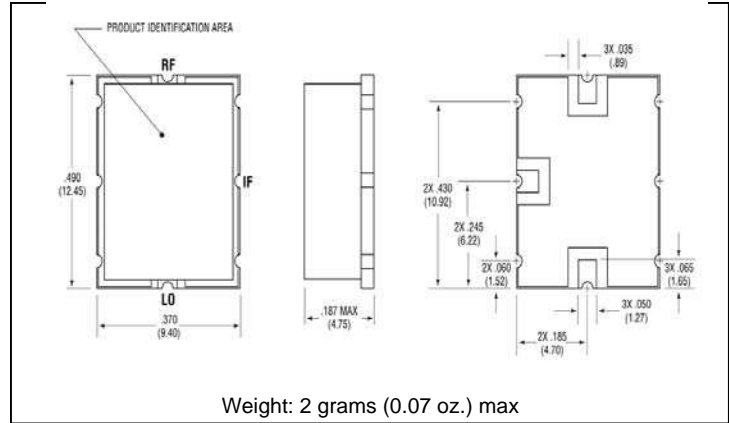

\* Dimensions are inches (millimeters)  $\pm 0.015$  (0.38) unless otherwise specified.

## Absolute Maximum Ratings

Parameter	Absolute Maximum
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +100°C
Peak Input Power	+20 dBm max @ +25°C +17 dBm max @ +85°C
Peak Input Current	50 mA DC