


Features


- 75 Ohm
- SMT unit
- Low Cost, Low Profile
- RoHS* Compliant

Description

M/A-COM's MAFL-007654-CD0A10 is a low cost, low profile diplex filter designed for use in CATV set-top-box and cable modem applications.

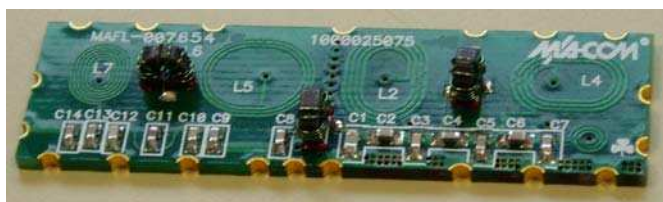

Functional Schematic

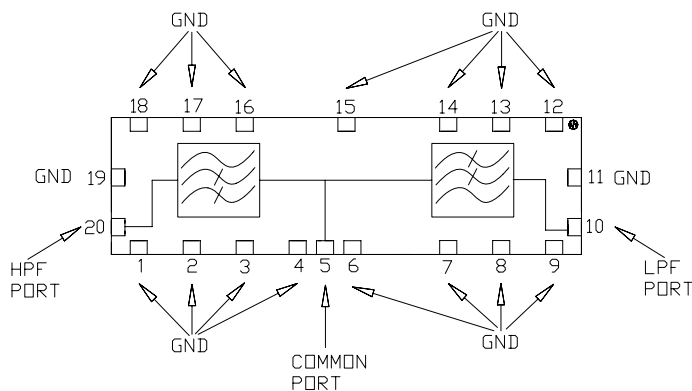

Pin configuration

Function	Pin Number
Common Port	5
Low Pass Port	10
Output Port	20
Ground	1-4, 6-9, 11-19
Not connected	-

Recommended Maximum Ratings ^{1,2}

Parameter	Value
RF Power	250mW
DC Current	30mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM does not recommend sustained operation near these survivability limits.



Ordering Information

Part Number	Package
MAFL-007654-CD0A10	900

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

SM-161 Case Style


Sm-161 Case Style

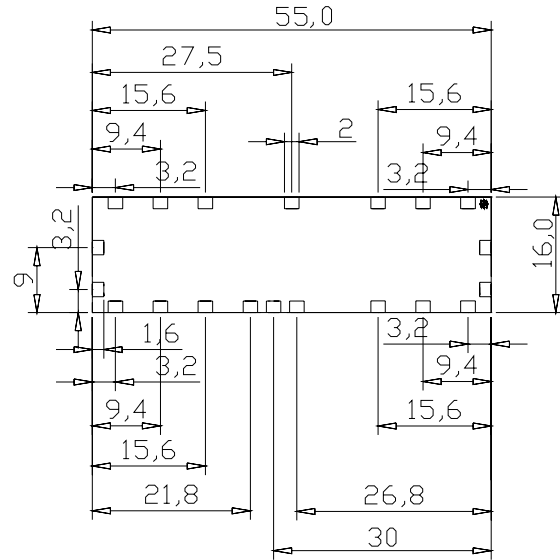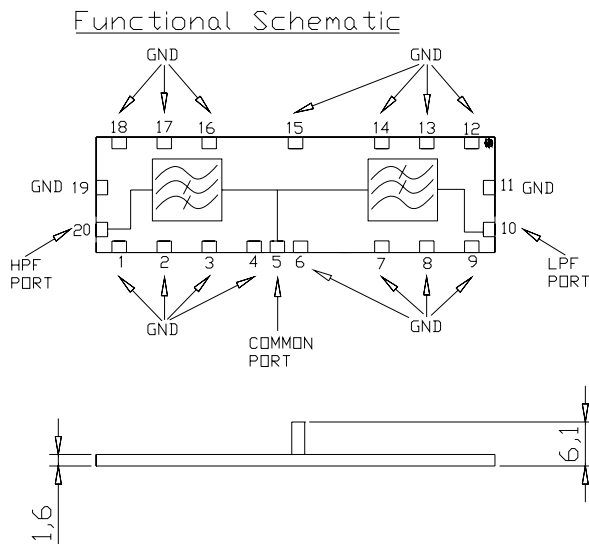

Dimensions in mm. Tolerance: .x ± 0.1, .xx ± 0.05

Maximum coplanarity specification of 0.1mm

Recommended PCB Configuration

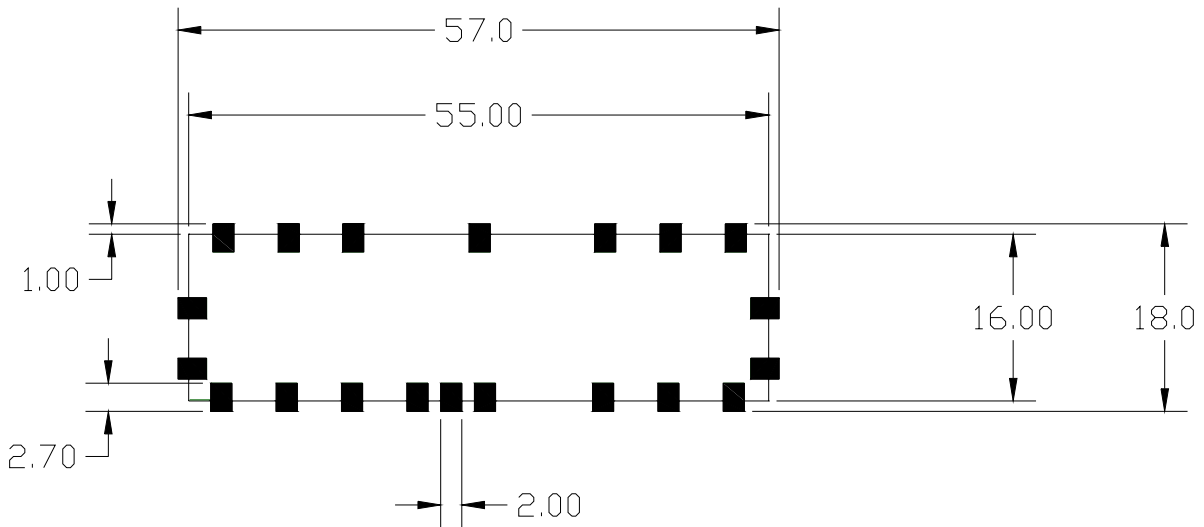

Dimensions in mm. Tolerance: .x ± 0.1, .xx ± 0.05

ADVANCED: Data Sheets contain information regarding a product MA-COM Technical Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product MA-COM Technical Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
 • **India** Tel: +91.80.43537383 • **China** Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.

MA-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.


Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$

Parameter	Test Conditions	Units	Min	Typ	Max
Frequency Range	5 - 42MHz / 54 - 1000MHz				
Insertion Loss	5 - 42MHz	dB	-	-0.5	-1.1
	Rejection				
	54 - 60MHz	dB	-53	-55	-
	60 - 200MHz	dB	-55	-58	-
Insertion Loss	54 - 60MHz	dB	-	-1.1	-1.3
	60 - 1000MHz	dB	-	-0.5	-1.1
Filter Isolation	5 - 39.5MHz	dB	-55	-62	-
	39.5 - 42MHz	dB	-48	-55	-
Filter Isolation	54 - 60MHz	dB	-53	-55	-
	60 - 500MHz	dB	-55	-58	-
	500 - 860MHz	db	-50	-55	-
	860 - 1000MHz	dB	-45	-50	-
Input Return Loss	5 - 42MHz	dB	-14	-17	-
Input Return Loss	54 - 64MHz	dB	-10	-14	-
	64 - 74MHz	dB	-12	16	-
	74 - 650MHz	dB	-15	20	-
	650 - 1000MHz	dB	-14	16	-


3. LFP rejection measured at 53.25MHz to guarantee 53dB min. rejection

Typical Performance Curves


Input Return Loss

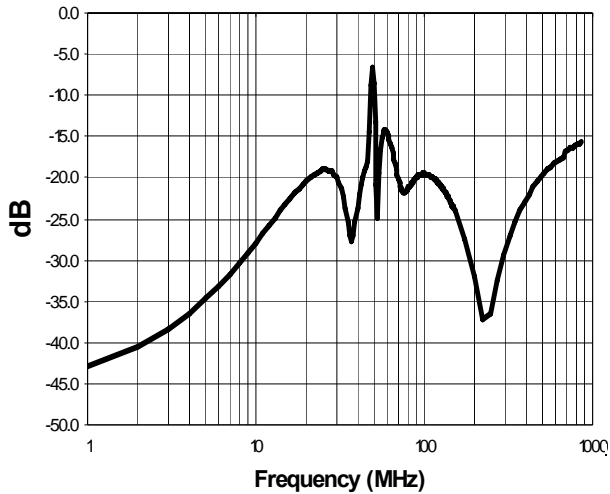

Filter Isolation

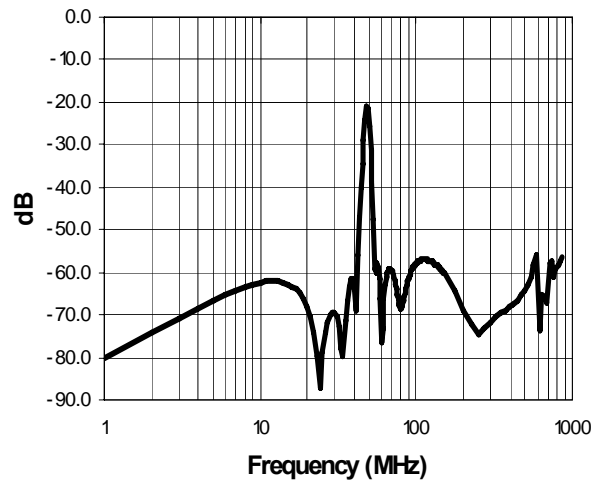

Low Pass Filter Insertion Loss

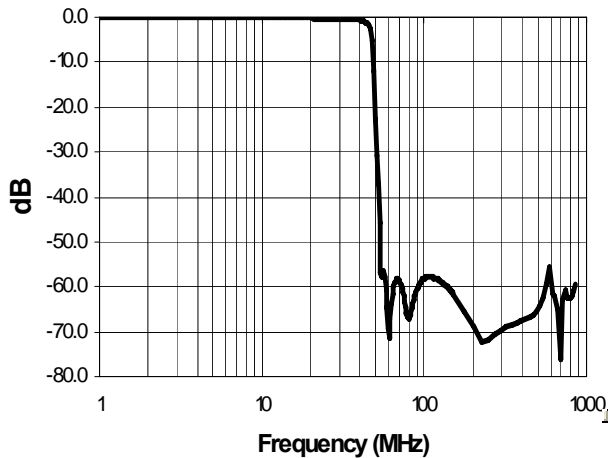

High Pass Filter Insertion Loss

