## LA45-1 / SMLA45-1



# Cascadable Amplifier 1000 to 4000 MHz

Rev. V3

#### **Features**

- SYMMETRICAL CLIPPING: GOOD EVEN-ORDER SUPPRESSION
- HIGH OUTPUT LEVEL: +17.0 dBm (TYP.)
- MEDIUM GAIN: 14.0 dB (TYP.)
- WIDE BANDWIDTH: 0.8-4.2 GHz (TYP.)

#### **Description**

The LA45-1 limiting amplifier is a discrete hybrid design, which uses thin film manufacturing processes for accurate performance and high reliability.


This design uses a Schottky diode limiter circuit at the input, and a two-stage GaAs FET feedback amplifier at the output. Both TO-8 and Surface Mount packages are hermetically sealed, and MIL-STD-883 environmental screening is available.

**Ordering Information** 

Part Number	Package	
LA45-1	TO-8	
SMLA45-1	Surface Mount	
CLA45-1 **	SMA Connectorized	

<sup>\*\*</sup> The connectorized version is not RoHs compliant.

#### **Product Image**



### Electrical Specifications: $Z_0 = 50\Omega$ , $V_{CC} = +15 V_{DC}$

Davamatav	Units -	Typical	Guaranteed	
Parameter		25°C	0º to 50°C	-54º to +85ºC*
Frequency	MHz	800-4200	1000-4000	1000-4000
Small Signal Gain (min)	dB	14.0	13.0	12.0
Gain Flatness (max)	dB	±0.5	±0.8	±1.0
Noise Figure (max)	dB	7.5	9.0	9.5
Power Output @ 1 dB comp. (max)	dBm	+17.0	+15.5	+14.5
Output Limiting Level (max) Pin = +17 dBm	dBm	+18.5	+20.5	+21.0
IP3/IP2	dBm	+27.0/+48.0		
Second Order Harmonic IP	dBm	+53.0		
VSWR Input / Output (max)		1.8:1 / 1.6:1	2.1:1 / 2.0:1	2.2:1 / 2.1:1
DC Current @ 15 Volts (max)	mA	110	115	120

## **Absolute Maximum Ratings**

Parameter	Absolute Maximum		
Storage Temperature	-62°C to +125°C		
Case Temperature	85°C		
DC Voltage	+16 V		
Continuous Input Power	+17 dBm		
Short Term Input power (1 minute max.)	100 mW		
"S" Series Burn-In Temperature (case)	85°C		

#### Thermal Data: $V_{CC} = +15 V_{DC}$

Parameter	Rating
Thermal Resistance $\theta_{jc}$	108.9°C/W
Transistor Power Dissipation P <sub>d</sub>	0.476 W
Junction Temperature Rise Above Case T <sub>jc</sub>	52°C

<sup>\*</sup> Over temperature performance limits for part number CLA45-1, guaranteed from 0°C to +50°C only.

<sup>•</sup> North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400


India Tel: +91.80.4155721
China Tel: +86.21.2407.1588
Visit www.macomtech.com for additional data sheets and product information.




Cascadable Amplifier 1000 to 4000 MHz

Rev. V3

#### Typical Performance Curves at +25℃

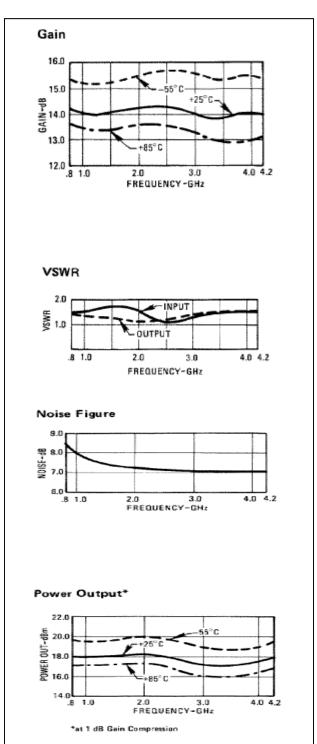

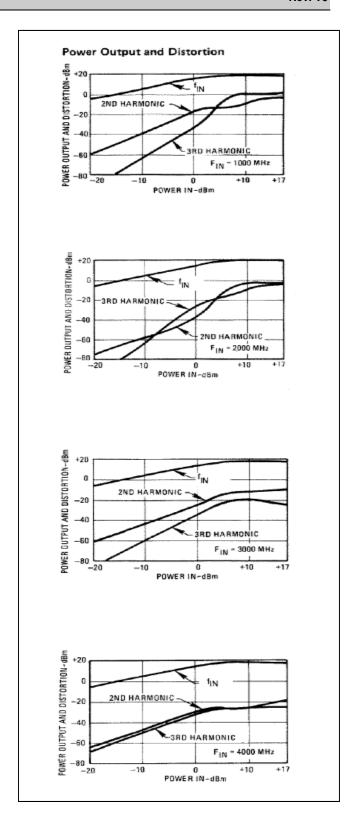





Cascadable Amplifier 1000 to 4000 MHz

Rev. V3


#### Typical Performance Curves at +25℃




#### Intercept Point




#### Phase Shift vs. Input Power




#### Outline Drawing: TO-8 \*

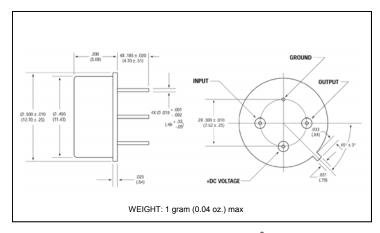

#### Outline Drawing: Surface Mount \*

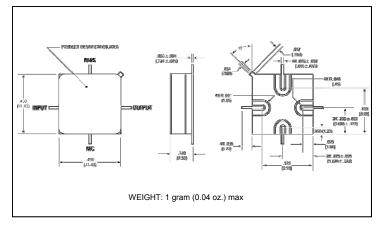

## Outline Drawing: SMA Connectorized \*

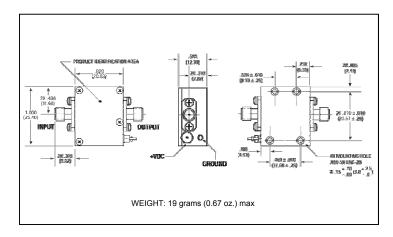

\* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.