

# Broad Band Voltage Variable Attenuator

## RVA-2500+ RVA-2500

50Ω 10 to 2500 MHz


### Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 85°C
Absolute Max. Supply Voltage(V+)	12V
Absolute Max. Control Voltage(Vctrl)	20V
Absolute Max. RF Input Level	+20 dBm
Permanent damage may occur if any of these limits are exceeded.	

### Pin Connections

RF IN	2
RF OUT	10
V CONTROL	6
V+	14
GROUND	1,3,4,5,7,8,9,11,12,13,15,16


### Outline Drawing

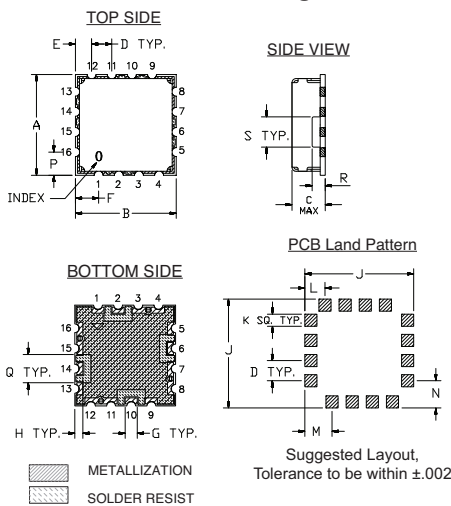

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.500	.500	.195	.100	.080	.115	.060	.040	.540
12.70	12.70	4.95	2.54	2.03	2.92	1.52	1.02	13.72
K	L	M	N	P	Q	R	S	wt.
.060	.100	.135	.135	.115	.140	.070	.150	grams
1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.0

Demo Board MCL P/N: TB-163  
Suggested PCB Layout (PL-040)

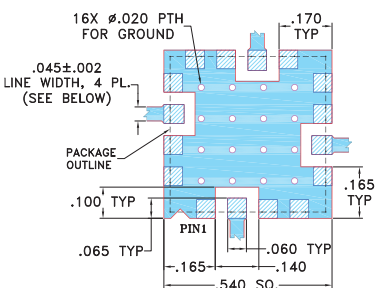

- NOTE:
- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS 0.025" ± 0.0025"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
  - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Features

- Broadband, 10-2500 MHz
- IP3, +43 dBm typ.
- 40 dB attenuation @ 1500 MHz
- Good VSWR at IN/OUT ports over attenuation range
- Minimal phase deviation over attenuation range
- No external bias and RF matching network required
- Shielded case



CASE STYLE: DV874  
PRICE: \$ 11.95 ea. QTY (10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

### Applications

- Power level control
- Feed forward amplifiers


### Electrical Specifications (T<sub>AMB</sub> = 25°C)

FREQ. (MHz)	MIN. INSERTION LOSS, dB (+15V)		MAX. ATTENUATION dB (0V)		INPUT POWER (dBm)	CONTROL Voltage Current (V) (mA)		IP3 (dBm)	RETURN LOSS (dB)	POWER SUPPLY Voltage Current (V) (mA)	
	Min.	Max.	Typ.	Max.		Typ.	Max.			Typ.	Max.
10 - 500	3.0	4.6	55	41	+20	0 - 17	30	43	20	+3 to +5	5
500 - 1500	3.3	5.0	40	30	+20	0 - 17	30	43	20	+3 to +5	5
1500 - 2500	4.0	6.2	37	25	+20	0 - 17	30	44	20	+3 to +5	5


### Notes:

- Rise/Fall time: 14μSec / 25μSec Typ.
- Switching Time, turn on/off: 14μSec / 25μSec Typ.
- Improved R.Loss in/out performance can be achieved at certain frequencies by choosing a V+ between +3V to +5V

### Equivalent Schematic

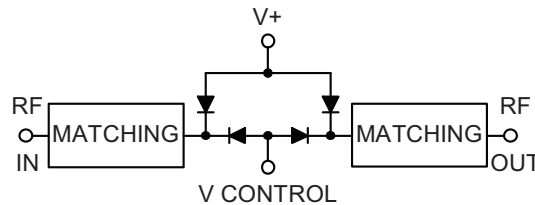

### RVA-2500 TYPICAL ATTENUATION AT 1000MHz

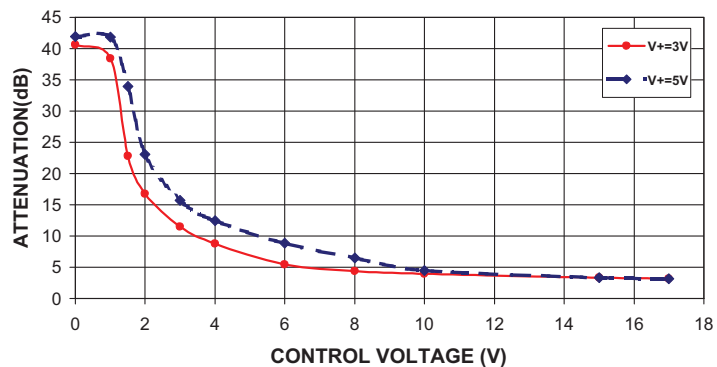


**Mini-Circuits®**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)  
IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site


Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. C  
M109215  
EDR-5407/2  
RVA-2500  
RAV  
110515  
Page 1 of 3


**RVA-2500**  
**ATTENUATION Vs. FREQUENCY**  
**OVER CONTROL VOLTAGES @ V+=3V**

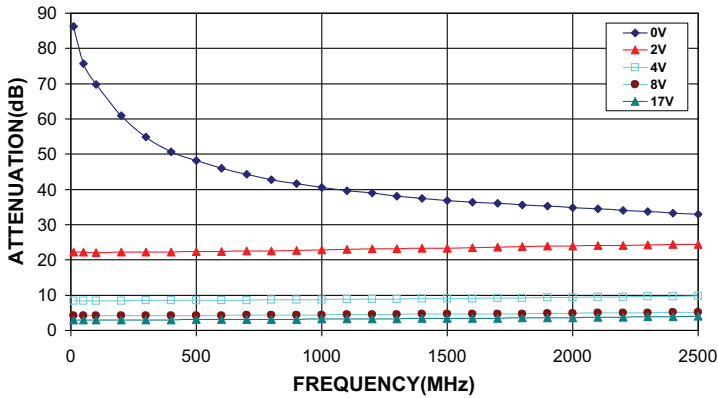


**RVA-2500**  
**ATTENUATION Vs. FREQUENCY**  
**OVER CONTROL VOLTAGES @ V+=5V**

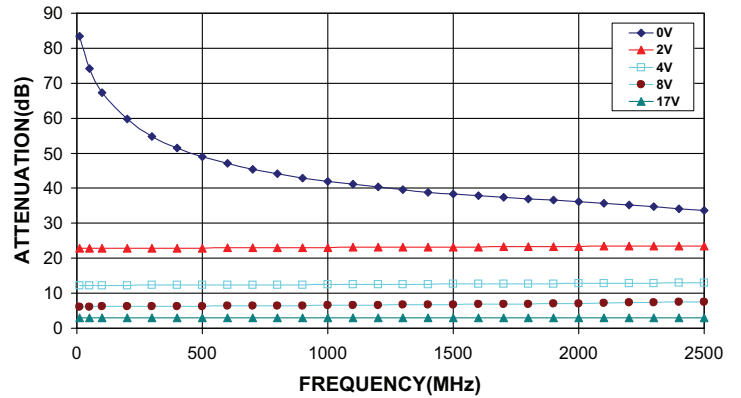


**RVA-2500**  
**ATTENUATION Vs. INPUT POWER**  
**OVER CONTROL VOLTAGES AT 1000MHz @ V+=3V**

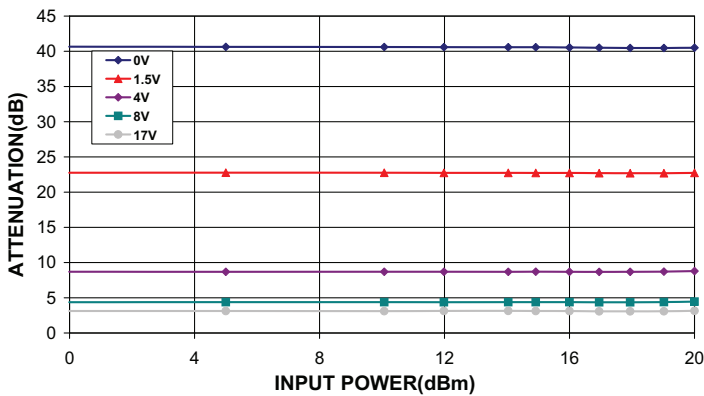


**RVA-2500**  
**ATTENUATION Vs. INPUT POWER**  
**OVER CONTROL VOLTAGES AT 1000MHz @ V+=5V**

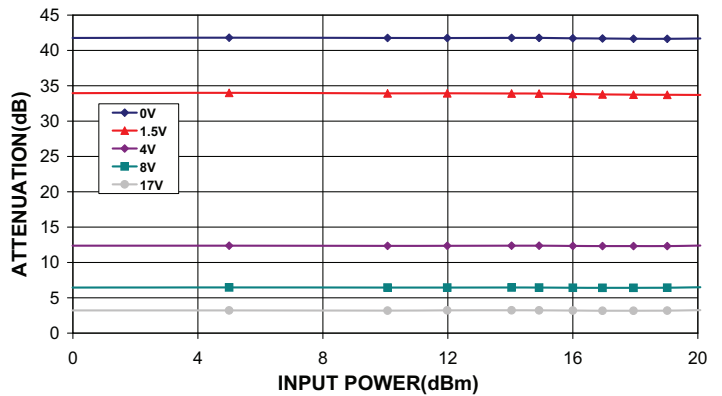

**RVA-2500**  
**INPUT RETURN LOSS Vs. FREQUENCY**  
**Vs. CONTROL VOLTAGE @ V+=3V**

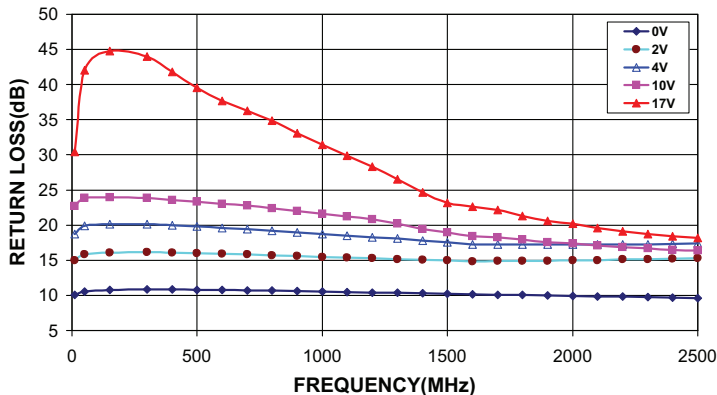

**RVA-2500**  
**INPUT RETURN LOSS Vs. FREQUENCY**  
**OVER CONTROL VOLTAGES @ V+=5V**

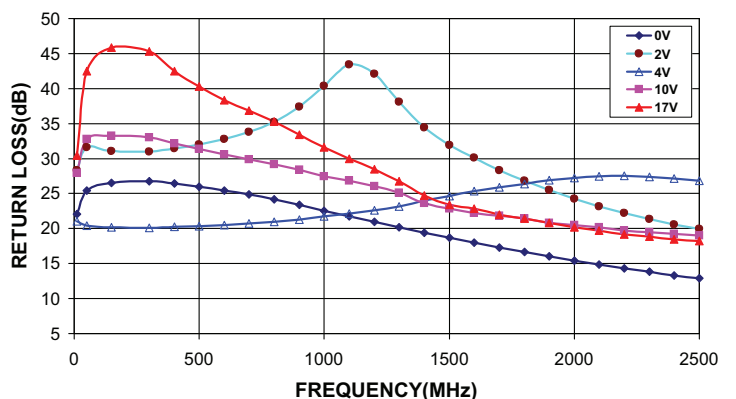


For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)


IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).


**RVA-2500**  
OUTPUT RETURN LOSS Vs. FREQUENCY  
OVER CONTROL VOLTAGES @ V+=3V

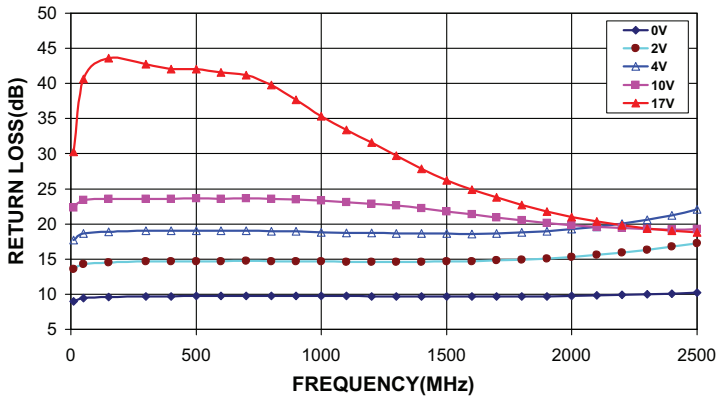


**RVA-2500**  
OUTPUT RETURN LOSS Vs. FREQUENCY  
Vs. CONTROL VOLTAGE @ V+=5V

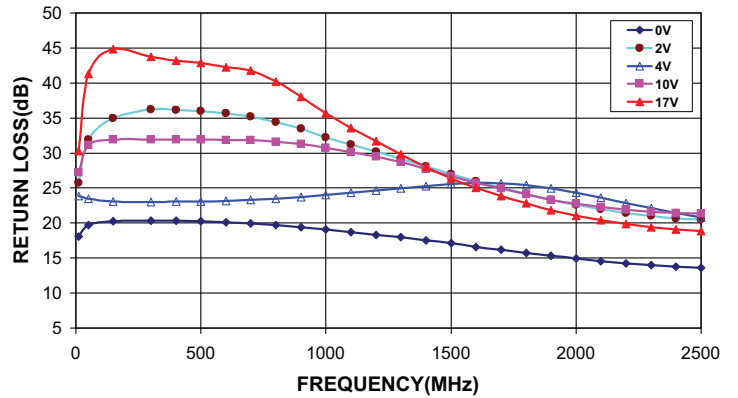


**RVA-2500**  
IP3 Vs. FREQUENCY  
OVER CONTROL VOLTAGES @ V+=3V

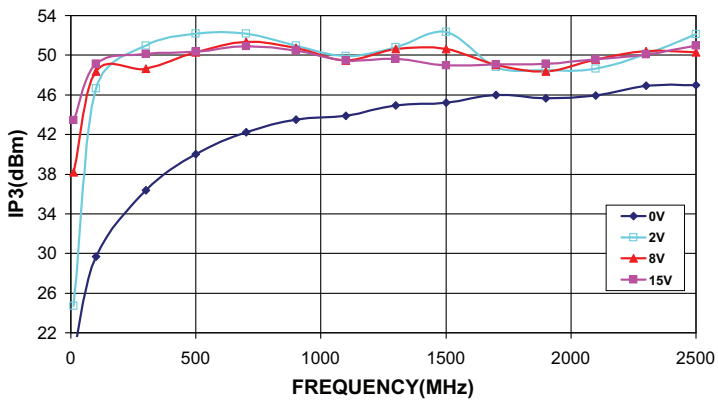

**RVA-2500**  
IP3 Vs. FREQUENCY  
OVER CONTROL VOLTAGES @ V+=5V

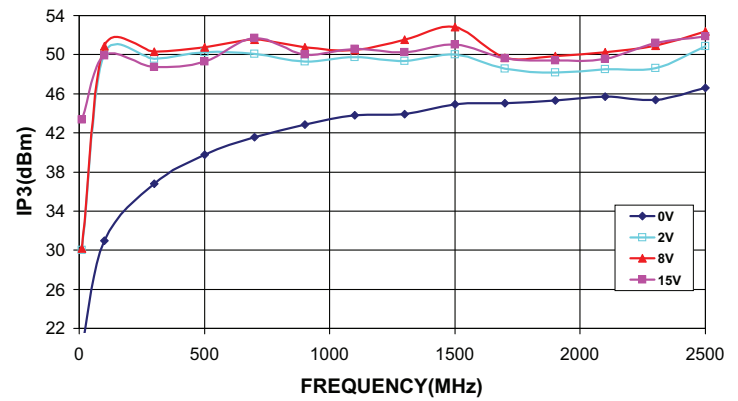

**RVA-2500**  
PHASE SHIFT Vs. FREQUENCY  
OVER CONTROL VOLTAGES @ V+=3V

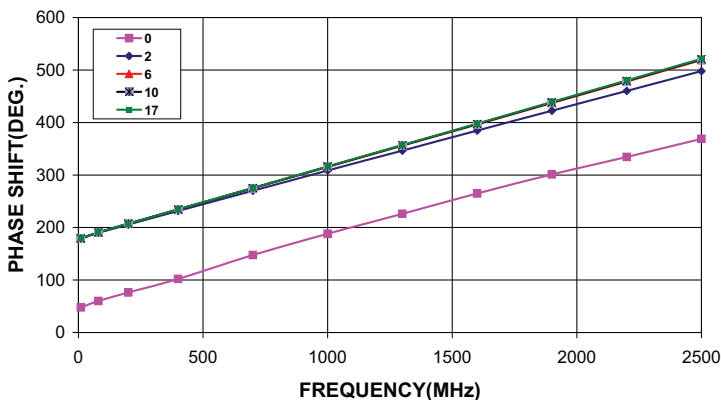

**RVA-2500**  
PHASE SHIFT Vs. FREQUENCY  
OVER CONTROL VOLTAGES @ V+=5V

