

X3 Frequency Multiplier

RMK-3-1262+

50Ω Output 6750 to 12600 MHz

The Big Deal

- Broadband, output frequency 6750 to 12600 MHz
- High rejection of adjacent harmonics, 45dB below the carrier, F3
- Small package size, 0.25" x 0.3"
- Low cost \$9.45, quantity of 1000



CASE STYLE: TT1224

Product Overview

The RMK-3-1262+ is a self contained frequency tripler that does not require external components. It is constructed using a specially designed diode quad ring configuration to enable high rejection of adjacent harmonics. The tripler is packaged in a miniature 0.3" x 0.25" case, with wrap-around terminations to enable convenient high density assembly.

Key Features

Feature	Advantages
Broadband frequency tripler Input 2250 to 4200 MHz Output 6750 to 12600 MHz	Enables the use of low frequency VCO's and Synthesizers to provide high frequency sources at low cost.
Low conversion loss, 15.5 dB	Enables output power to be sufficiently high so that amplifier gain requirements following the tripler is reduced.
High rejection of adjacent harmonics, F2, 45 dB and F4, 50 dB	Extremely high rejection of F2 and F4 harmonics enables a significant reduction of unwanted signals without the need for filters.
Low cost	Enables a practical solution to achieve high frequency sources from low cost, lower frequency VCO's and synthesizers.

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



X3 Frequency Multiplier

50Ω

Output 6750 to 12600 MHz

RMK-3-1262+



CASE STYLE: TT1224
PRICE: \$11.95 ea. QTY (10-49)

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	17 dBm
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	1
OUTPUT	4
GROUND	2,3,5,6

Features

- broadband
- high rejection F2, -45 dBc typ.; F4, -50 dBc typ.
- low cost
- aqueous washable

Applications

- synthesizers
- local oscillators
- satellite up and down converters

Electrical Specifications


MULTIPLICATION FACTOR	FREQUENCY (MHz)		INPUT POWER (dBm)		CONVERSION LOSS (dB)	*HARMONIC OUTPUT (dBc)					
	F1 Input	F3 Output	Min.	Max.		F1 Typ.	F1 Min.	F2 Typ.	F2 Min.	F4 Typ.	F4 Min.
3	2250-4200	6750-12600	7	11	15.5 20	5	-7	45	31	50	35

* Harmonics of input frequency below the power level of F3

Typical Performance Data

INPUT RF= 7 dBm					INPUT RF= 11 dBm					
Input Frequency (MHz)	Conversion Loss (dB)	Harmonic Output Below F3 (-dBc)				Conversion Loss (dB)	Harmonic Output Below F3 (-dBc)			
	F3	F1	F2	F4	F3		F1	F2	F4	
2250.00	17.34	4.37	55.37	56.83	15.75	8.87	57.56	54.38		
2350.00	16.73	4.35	55.50	60.18	15.55	8.39	57.41	56.26		
2450.00	15.78	4.68	55.43	55.15	14.93	8.40	58.27	54.07		
2550.00	14.89	4.94	55.55	63.09	14.04	8.62	58.28	54.02		
2650.00	14.49	4.64	55.10	63.33	14.26	7.69	57.02	51.50		
2750.00	14.17	4.37	54.22	58.10	14.47	6.93	54.77	51.98		
2850.00	14.53	3.57	52.72	56.68	14.77	6.12	53.26	53.23		
2955.00	14.96	2.65	51.53	55.20	14.78	5.53	52.64	52.86		
3065.00	13.93	2.97	51.62	53.77	15.19	4.58	51.48	52.28		
3175.00	14.25	2.18	49.82	52.00	16.00	3.32	49.38	50.78		
3285.00	14.62	1.52	47.86	51.01	15.68	3.29	48.08	50.55		
3395.00	15.16	0.63	46.51	48.13	15.54	3.04	47.61	48.80		
3505.00	14.96	0.35	46.85	48.16	15.22	2.79	48.25	47.53		
3615.00	15.24	0.40	47.10	47.46	15.91	1.75	47.39	46.11		
3725.00	15.75	-1.31	41.54	50.15	16.72	0.54	43.14	46.61		
3835.00	15.96	-1.78	40.06	53.41	16.62	-0.31	42.91	50.32		
3945.00	15.77	-1.88	39.53	53.18	16.04	-0.63	43.09	53.97		
4050.00	16.41	-3.10	38.50	52.62	16.11	-0.06	42.56	57.35		
4150.00	15.90	-3.04	38.51	56.51	15.75	-0.15	42.83	59.83		
4200.00	15.81	-3.06	38.43	60.50	15.82	-0.36	42.58	60.83		


Outline Drawing

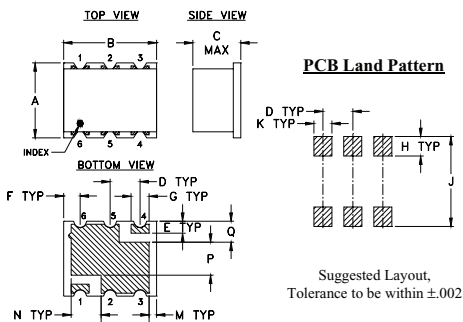

Outline Dimensions (inch)

A	B	C	D	E	F	G	H
.25	.31	.16	.100	.040	.055	.060	.065
6.35	7.87	4.06	2.54	1.02	1.40	1.52	1.65
J	K	L	M	N	P	Q	wt.
.300	.060	.160	.025	.100	.110	.070	grams
7.62	1.52	4.06	0.64	2.54	2.79	1.78	0.16

Demo Board MCL P/N: TB-393 Suggested PCB Layout (PL-258)

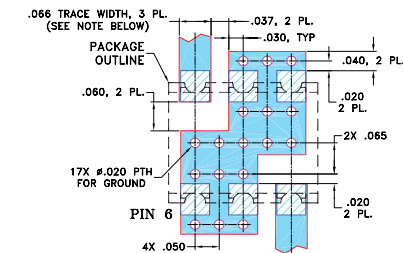

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 35166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M124708
RMK-3-1262+
ED-13601
DJ/CP/AM
090930
Page 2