

Surface Mount

Power Splitter/Combiner

AMT-2+ AMT-2

2 Way-0°/180° 50Ω 50 to 200 MHz



CASE STYLE: CD636
PRICE: \$12.95 ea. QTY. (10)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	0.5W max.
Internal Dissipation	0.125W max.

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

SUM PORT	3
PORT 1	6
PORT 2	4
PORT J	1
GROUND	2,5

Outline Drawing




PCB Land Pattern



Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.162	.055	.100
6.91	7.87	5.59	2.54	4.11	1.40	2.54
H	J	K	L	wt		
.030	.026	.065	.300	grams		
0.76	0.66	1.65	7.62	0.25		

Demo Board MCL P/N: TB-211 Suggested PCB Layout (PL-097)



- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low insertion S-1 and S-2, 0.25 dB typ; J-1 and J-2, 0.8 dB typ.
- very good input VSWR, 1.10 typ. and good output VSWR, 1.12 typ.
- excellent amplitude unbalance, 0.1 dB typ.
- excellent phase unbalance, 1 deg. typ.
- high isolation S-J ports and 1-2 ports, 35 dB typ.
- protected under US Patent 6,133,525

Applications

- satellite
- IF receiver




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 3.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
	Typ.	Min.	Typ.	Max.	Max.	Max.
f _L -f _H	35	20	0.8	1.2	2	0.3


Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)		Amplitude Unbal. (dB)	Insertion Loss (dB)		Amplitude Unbal. (dB)	Isolation (dB)		Phase Unbal. (deg.)		VSWR S	VSWR 1	VSWR 2
	S-1	S-2	(S-1)-(S-2)	J-1	J-2	(J-1)-(J-2)	1-2	S-J	(S-1)-(S-2)	(J-1)-(J-2)			
50.00	3.24	3.22	0.02	3.76	3.77	0.00	32.71	44.00	0.05	179.87	1.06	1.14	1.11
60.00	3.24	3.22	0.02	3.76	3.77	0.00	33.84	42.49	0.06	179.87	1.06	1.14	1.11
70.00	3.25	3.22	0.03	3.77	3.77	0.01	34.86	41.16	0.02	179.81	1.07	1.15	1.11
80.00	3.26	3.22	0.04	3.77	3.77	0.01	35.78	40.00	0.05	179.80	1.08	1.16	1.11
90.00	3.27	3.22	0.05	3.77	3.78	0.02	36.61	38.99	0.04	179.79	1.09	1.17	1.11
100.00	3.29	3.23	0.05	3.78	3.79	0.01	37.39	38.05	0.02	179.79	1.10	1.18	1.12
110.00	3.30	3.24	0.06	3.78	3.81	0.02	38.10	37.21	0.05	179.79	1.11	1.19	1.12
120.00	3.31	3.24	0.07	3.80	3.82	0.02	38.74	36.45	0.02	179.75	1.12	1.21	1.13
130.00	3.33	3.24	0.09	3.80	3.82	0.02	39.36	35.71	0.00	179.73	1.13	1.22	1.14
140.00	3.34	3.24	0.10	3.81	3.84	0.03	39.94	35.04	0.02	179.69	1.14	1.23	1.14
150.00	3.35	3.25	0.11	3.81	3.85	0.03	40.36	34.44	0.02	179.68	1.15	1.24	1.15
170.00	3.38	3.25	0.13	3.82	3.87	0.05	41.30	33.27	0.09	179.72	1.17	1.27	1.16
180.00	3.40	3.26	0.14	3.83	3.88	0.05	41.67	32.75	0.06	179.68	1.18	1.28	1.17
190.00	3.42	3.27	0.16	3.84	3.90	0.06	42.03	32.22	0.10	179.68	1.19	1.30	1.18
200.00	3.43	3.26	0.17	3.85	3.91	0.06	42.39	31.74	0.15	179.68	1.20	1.32	1.19

1. Total Loss = Insertion Loss + 3dB splitter loss.

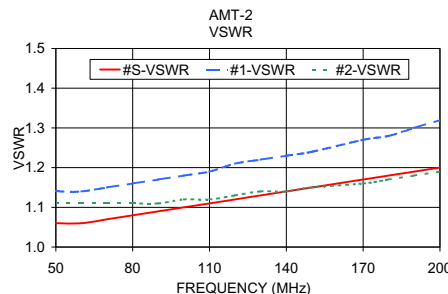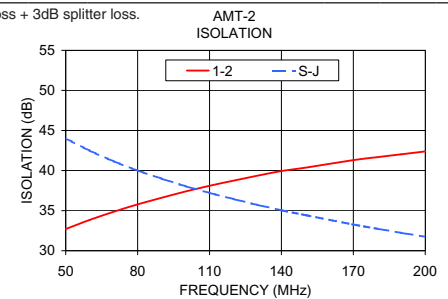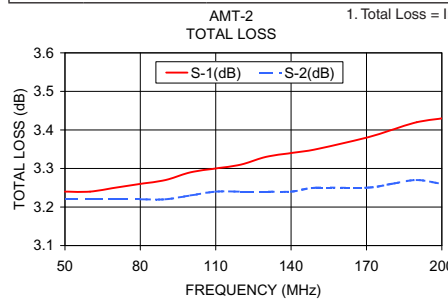

electrical schematic



- S-J ports, isolation 40 typical
- Inphase ports, S-1 and S-2 insertion loss 0.2 dB typical
- Amplitude unbalance defined by input S or J ports to output 1 and 2

For detailed performance specs & shopping online see web site

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. B
M127604
AMT-2
ED-7382/2
HY/TD/CP/AM
100621