

Surface Mount

Power Splitter/Combiner

AD6PS-1+

6 Way-0° 50Ω 2 to 250 MHz



CASE STYLE: CJ725
PRICE: \$26.95 ea. QTY. (10-49)

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	0.5W max.
Internal Dissipation	0.5W max.

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

SUM PORT	1
PORT 1	8
PORT 2	7
PORT 3	6
PORT 4	5
PORT 5	4
PORT 6	3
GROUND	2

Outline Drawing



PCB Land Pattern




Unconnected I output

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.397	.032	.385	.435	.310	.215	.100
10.08	0.81	9.78	11.05	7.87	5.46	2.54
H	J	K	L	M	N	P
.015	.025	.035	.075	.120	.060	.420
0.38	0.64	0.89	1.91	3.05	1.52	10.67
						grams
						0.45

Demo Board MCL P/N: TB-84 Suggested PCB Layout (PL-089)

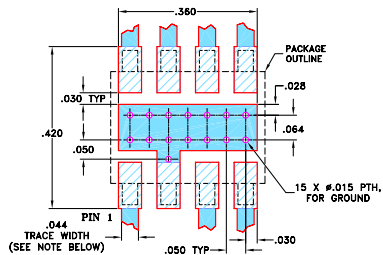

NOTE: TRACE WIDTH IS SHOWN FOR ROGERS RO4350 WITH DIELECTRIC THICKNESS 0.020" ± 0.0015", COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

- DENOTES PCB COPPER LAYOUT
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wideband, 2 to 250 MHz
- high isolation, 30 dB typ.
- good input port matching VSWR, 1.20 typ.
- good output port matching VSWR, 1.10 typ.
- small surface mount package

Applications

- VHF-TV

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)			INSERTION LOSS (dB) ABOVE 7.8 dB			PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)								
	L		M	U		L		M	U		L		M	U				
	Typ.	Min.	Typ. Min.	Typ. Min.	Typ. Max.	Typ. Max.	Typ. Max.	Max.	Max.	Max.	Max.	Max.	Max.	Max.				
$f_c - f_u$																		
2-250	35	17	30	20	27	20	0.2	0.6	0.2	1.0	0.6	1.5	2	6	9	0.3	0.4	0.6

L = 2-20 MHz M = 20-125 MHz U = 125-250 MHz

Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)			Amplitude Unbalance (dB)	Isolation (dB)		Phase Unbal. (deg.)	VSWR S	VSWR OUTPUTS	
	S-1	S-3	S-5		Adjacent	Opposite				
	2.00	8.07	8.07		8.09	0.02			44.32	21.86
3.00	8.03	8.03	8.05	0.02	46.13	23.38	0.15	1.10	1.33	
4.00	8.01	8.02	8.03	0.02	46.77	24.50	0.14	1.09	1.28	
5.00	8.01	8.01	8.02	0.01	46.81	25.38	0.22	1.09	1.25	
10.00	8.00	7.99	8.01	0.02	45.82	27.85	0.32	1.08	1.17	
20.00	8.00	8.01	8.03	0.03	44.12	29.38	0.52	1.08	1.13	
30.00	8.03	8.03	8.05	0.02	42.21	29.73	0.80	1.09	1.12	
40.00	8.04	8.05	8.07	0.03	40.48	29.69	0.98	1.10	1.12	
50.00	8.07	8.07	8.10	0.03	39.00	29.54	1.28	1.11	1.11	
80.00	8.12	8.11	8.13	0.03	36.01	28.87	2.03	1.15	1.10	
140.00	8.30	8.26	8.28	0.04	33.66	27.80	3.30	1.19	1.09	
170.00	8.31	8.26	8.28	0.06	33.93	27.65	3.95	1.18	1.10	
200.00	8.45	8.37	8.40	0.08	35.49	27.95	4.50	1.14	1.12	
230.00	8.58	8.47	8.50	0.11	38.19	28.94	4.94	1.13	1.15	
250.00	8.72	8.58	8.59	0.17	37.43	30.14	5.29	1.18	1.17	

1. Total Loss = Insertion Loss + 7.8dB splitter loss.

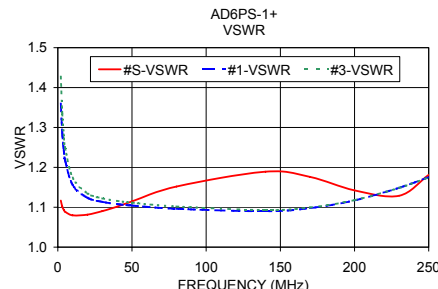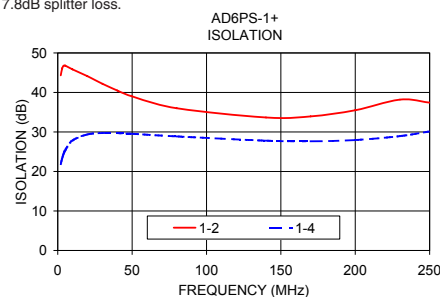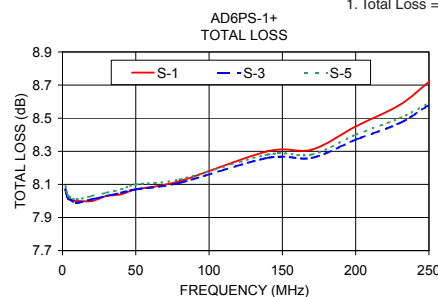

electrical schematic



For detailed performance specs & shopping online see web site



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. J
M127604
ED-7967/1
AD6PS-1+
HY/TD/CP/AM
120322