


MECHANICAL DATA
Dimensions in mm (inches)

**NPN BIPOLAR
POWER DARLINGTON
TRANSISTOR**

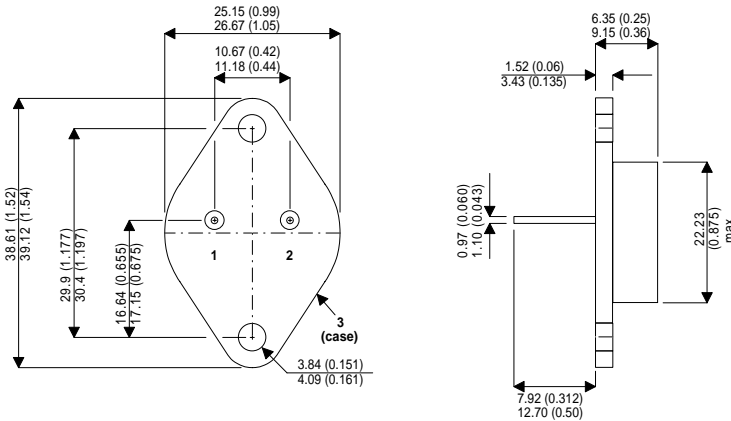

TO-3 (TO-204AA)

Underside View

1 = Emitter 2 = Base 3 = Collector

FEATURES

- FAST SWITCHING
- CECC SCREENING OPTIONS
- SPACE QUALITY LEVELS OPTIONS
- JAN LEVEL SCREENING OPTIONS

APPLICATIONS

- HIGH SPEED SWITCHING CIRCUITS
- POWER AMPLIFIERS

ABSOLUTE MAXIMUM RATINGS ($T_C = 25^\circ\text{C}$ unless otherwise stated)

V_{CBO}	Collector – Base Voltage ($I_E = 0$)	120V
V_{CEO}	Collector – Emitter Voltage ($I_B = 0$)	120V
V_{EBO}	Emitter – Base Voltage ($I_C = 0$)	7V
I_B	Base Current	250mA
I_C	Collector Current	15A
P_D	Power Dissipation @ $T_C = 25^\circ\text{C}$	120W
$R_{\theta JC}$	Thermal Resistance Junction to Case	1.46°C/W
T_J, T_{STG}	Operating and Storage Junction Temperature Range	-65 to +200°C

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
BV_{CEO}	Collector – Emitter Breakdown Voltage $I_C = 200\text{mA}$	120			V
I_{CBO}	Collector – Base Cut-off Current $V_{CB} = 120\text{V}$			500	μA
I_{CEV}	Collector – Emitter Cut-off Current $V_{CEV} = 120\text{V}$ $V_{BE(off)} = 1.5\text{V}$			5.0	mA
I_{CER}	Collector – Emitter Cut-off Current $V_{CER} = 120\text{V}$ $R_{BE} = 10\text{k}\Omega$ $T_C = 150^\circ\text{C}$			5.0	
I_{CEO}	Collector – Base Cut-off Current $V_{CE} = 120\text{V}$			1.0	
$V_{CE(sat)}$	Collector – Emitter Saturation Voltage	$I_C = 10\text{A}$ $I_B = 100\text{mA}$		2.8	V
		$I_C = 15\text{A}$ $I_B = 150\text{mA}$		4.0	
$V_{BE(sat)}$	Base – Emitter On Voltage	$I_C = 10\text{A}$ $I_B = 100\text{mA}$		3.5	
		$I_C = 15\text{A}$ $I_B = 150\text{mA}$		4.5	
h_{FE}	DC Current Gain	$I_C = 0.4\text{A}$ $V_{CE} = 3\text{V}$	200		—
		$I_C = 4.0\text{A}$ $V_{CE} = 3\text{V}$	2000	20000	
		$I_C = 10\text{A}$ $V_{CE} = 3\text{V}$	500	5000	
		$I_C = 15\text{A}$ $V_{CE} = 4\text{V}$	100		
V_F	Forward Voltage $I_{EC} = 15\text{A}$	4.5			V
$[h_{fe}]$	Small Signal Current Gain $V_{CE} = 3\text{V}$ $I_C = 3\text{A}$ $f = 1.0\text{MHz}$	10		200	—
t_d	Delay Time $I_C = 10\text{A}$ $V_{CC} = 30\text{V}$			0.15	μs
t_r	Rise time $I_{B1} = 100\text{mA}$			1.0	
t_s	Storage Time $I_C = 10\text{A}$ $V_{CC} = 30\text{V}$			2.0	
t_f	Fall Time $I_{B1} = -I_{B2} = 100\text{mA}$			7.0	

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.