
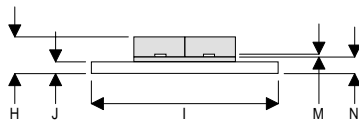


MECHANICAL DATA



DK

PIN 1 SOURCE (COMMON) PIN 2 DRAIN 1  
 PIN 3 DRAIN 2 PIN 4 GATE 2  
 PIN 5 GATE 1

DIM	mm	Tol.	Inches	Tol.
A	6.45	0.13	0.254	0.005
B	1.65R	0.13	0.065R	0.005
C	45°	5°	45°	5°
D	16.51	0.76	0.650	0.03
E	6.47	0.13	0.255	0.005
F	18.41	0.13	0.725	0.005
G	1.52	0.13	0.060	0.005
H	4.82	0.25	0.190	0.010
I	24.76	0.13	0.975	0.005
J	1.52	0.13	0.060	0.005
K	0.81R	0.13	0.032R	0.005
M	0.13	0.02	0.005	0.001
N	2.16	0.13	0.085	0.005

**GOLD METALLISED  
 MULTI-PURPOSE SILICON  
 DMOS RF FET  
 40W – 12.5V – 500MHz  
 PUSH-PULL**

FEATURES

- SIMPLIFIED AMPLIFIER DESIGN
- SUITABLE FOR BROAD BAND APPLICATIONS
- VERY LOW  $C_{rss}$
- SIMPLE BIAS CIRCUITS
- LOW NOISE
- HIGH GAIN – 10 dB MINIMUM

APPLICATIONS

- HF/VHF/UHF COMMUNICATIONS  
 from 1MHz to 1 GHz

ABSOLUTE MAXIMUM RATINGS ( $T_{case} = 25^{\circ}C$  unless otherwise stated)

$P_D$	Power Dissipation	134W
$BV_{DSS}$	Drain – Source Breakdown Voltage *	40V
$BV_{GSS}$	Gate – Source Breakdown Voltage *	$\pm 20V$
$I_{D(sat)}$	Drain Current *	16A
$T_{stg}$	Storage Temperature	-65 to 150°C
$T_j$	Maximum Operating Junction Temperature	200°C

\* Per Side

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

## ELECTRICAL CHARACTERISTICS (T<sub>case</sub> = 25° C unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
<b>PER SIDE</b>					
B <sub>V</sub> DSS	Drain–Source Breakdown Voltage V <sub>GS</sub> = 0 I <sub>D</sub> = 10mA	40			V
I <sub>D</sub> DSS	Zero Gate Voltage Drain Current V <sub>DS</sub> = 12.5V V <sub>GS</sub> = 0			8	mA
I <sub>G</sub> DSS	Gate Leakage Current V <sub>GS</sub> = 20V V <sub>DS</sub> = 0			4	μA
V <sub>GS(th)</sub>	Gate Threshold Voltage * I <sub>D</sub> = 10mA V <sub>DS</sub> = V <sub>GS</sub>	0.5		7	V
g <sub>fs</sub>	Forward Transconductance * V <sub>DS</sub> = 10V I <sub>D</sub> = 1.6A	1.44			S
<b>TOTAL DEVICE</b>					
G <sub>PS</sub>	Common Source Power Gain P <sub>O</sub> = 40W	10			dB
η	Drain Efficiency V <sub>DS</sub> = 12.5V I <sub>DQ</sub> = 1.6A	40			%
VSWR	Load Mismatch Tolerance f = 500MHz	20:1			—
<b>PER SIDE</b>					
C <sub>i</sub> SS	Input Capacitance V <sub>DS</sub> = 0 V <sub>GS</sub> = -5V f = 1MHz			96	pF
C <sub>o</sub> SS	Output Capacitance V <sub>DS</sub> = 12.5V V <sub>GS</sub> = 0 f = 1MHz			80	pF
C <sub>r</sub> SS	Reverse Transfer Capacitance V <sub>DS</sub> = 12.5V V <sub>GS</sub> = 0 f = 1MHz			8	pF

\* Pulse Test: Pulse Duration = 300 μs , Duty Cycle ≤ 2%

## HAZARDOUS MATERIAL WARNING

The ceramic portion of the device between leads and metal flange is beryllium oxide. Beryllium oxide dust is highly toxic and care must be taken during handling and mounting to avoid damage to this area.

**THESE DEVICES MUST NEVER BE THROWN AWAY WITH GENERAL INDUSTRIAL OR DOMESTIC WASTE.**

## THERMAL DATA

R <sub>THj-case</sub>	Thermal Resistance Junction – Case	Max. 1.3° C / W
-----------------------	------------------------------------	-----------------

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.