

# X-ray TDI Camera C10650 Series



▲ C10650-461

X-ray TDI camera C10650 series is useful for in-line applications requiring high-speed operation with high sensitivity. TDI is a special image acquisition method that has been used extensively in machine vision applications for industrial inspection. TDI imaging is appropriate for applications where it is desired to record a linear movement, or where the aspect ratio of the subject being imaged is significantly asymmetric.

Low brightness under high resolution usage, a problem with conventional line sensor cameras, is improved with this X-ray TDI camera, making it suitable for applications which require high resolution.

## FEATURES

- **Wide detection width for in-line inspection**  
(Maximum detection width: 300 mm)
- **High resolution / high sensitivity**  
(Horizontal spatial resolution with 128 (V) TDI stages)
  - C10650-461: 6144 (H) × 128 (V)
  - C10650-321: 4608 (H) × 128 (V)
  - C10650-221: 3040 (H) × 128 (V)
- **High-speed readout approx. 11 m/min with 2 × 2 binning**
- **High S/N ratio with 16 bit/12 bit output**
- **Camera Link Interface (Base Configuration)**
- **Single power supply (+15V) operation**
- **Real time dark current / shading correction function**
- **Frame readout mode for easy installation alignment**


## APPLICATIONS

- **Printed circuit board (PCB) inspection**
- **Battery inspection**
- **Medicine inspection**
- **Surface-mounted component inspection**
- **High-resolution in-line non-destructive inspection**


## OPERATING PRINCIPLE OF TDI

### TDI (Time Delay Integration):

Time Delay Integration is a technique in which signal charges in each line are vertically transferred during charge readout. By synchronizing the vertical transfer timing with the movement of the object, the signal charges are integrated without smear. As a result, TDI provides higher sensitivity than standard line scan cameras. It is an ideal technology for high-throughput X-ray applications that require high sensitivity and high resolution simultaneously.

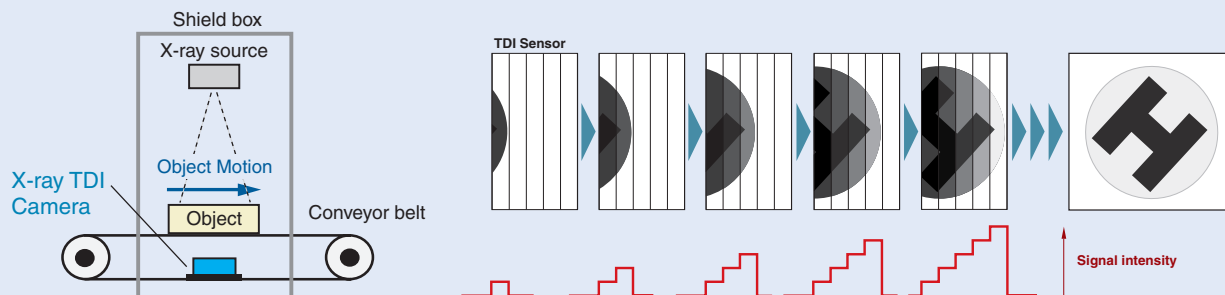


# High-resolution, High-speed Camera with a Wide

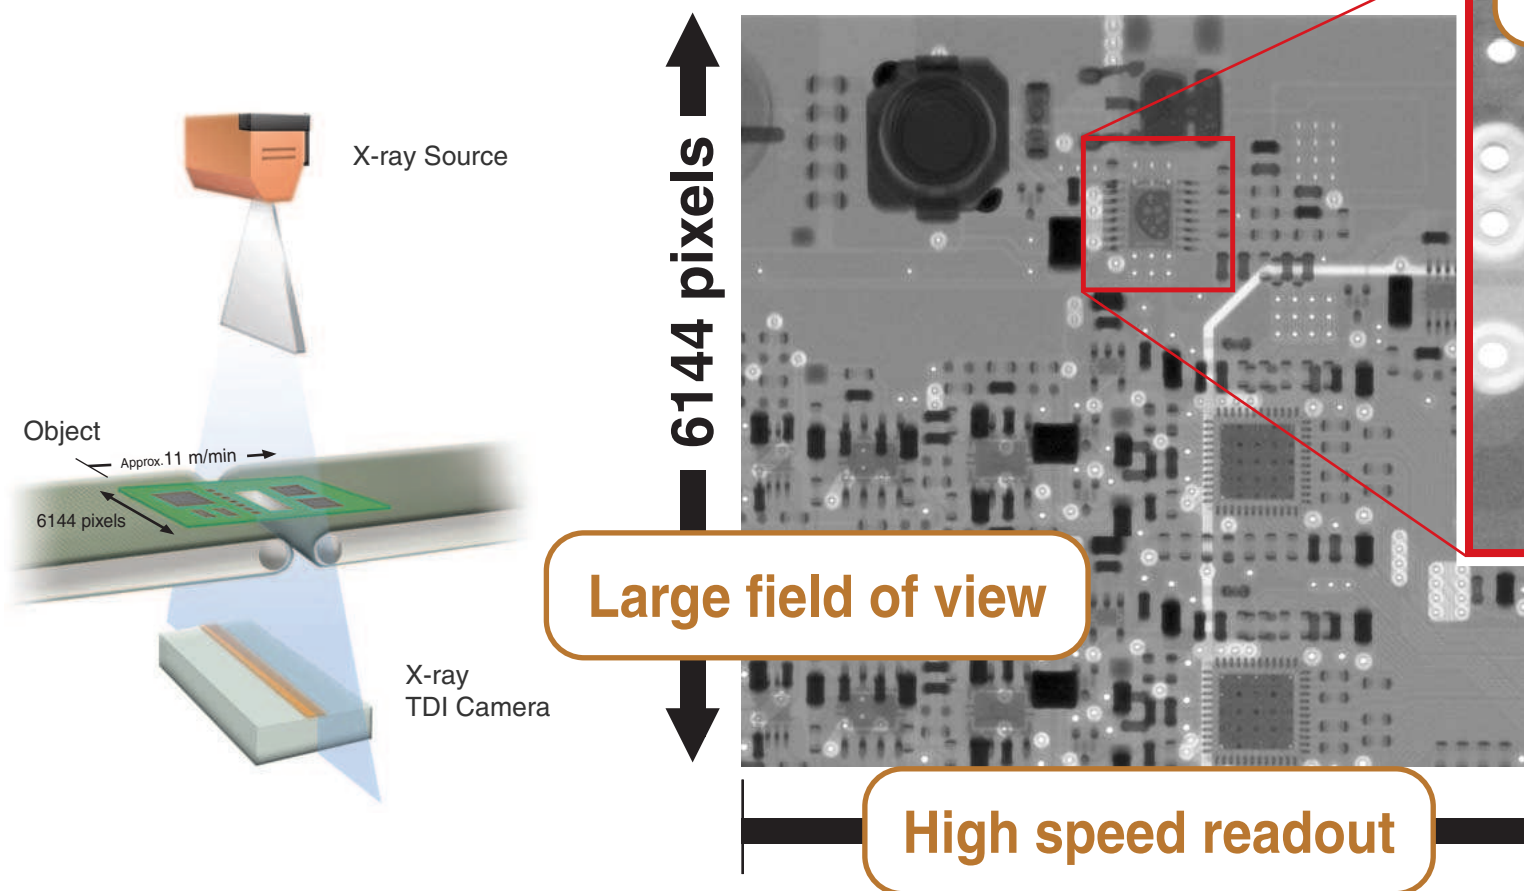


## MEASUREMENT EXAMPLES

### 1 PC Board

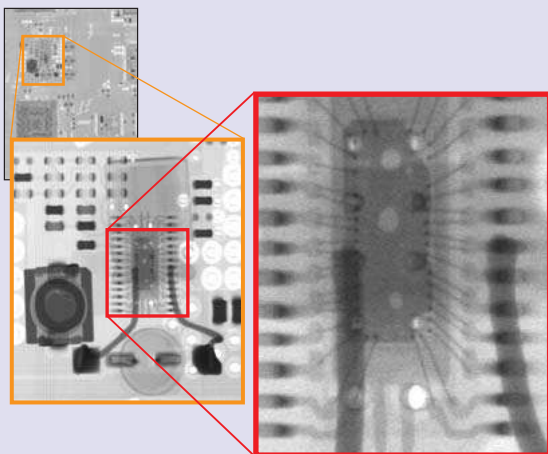


▲ Back fillet under stacked parts, wire bonding in the IC, void in die-bond pad and lapping films can be seen.

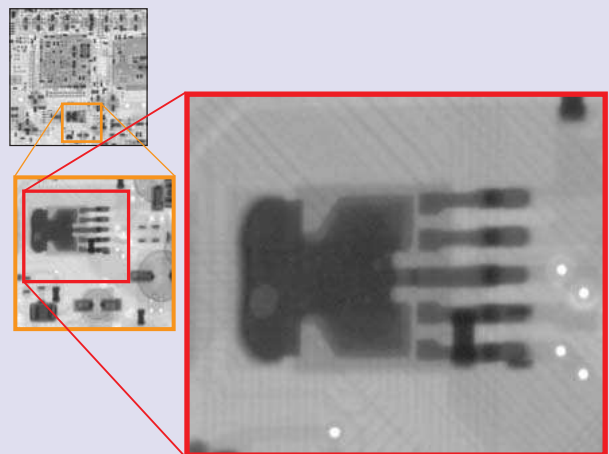


▲ Void in solder surface mount device and condition of solder fillet can clearly be seen.

# The Field of View for In-line 100% X-ray Inspection

**High resolution  
image acquisition**

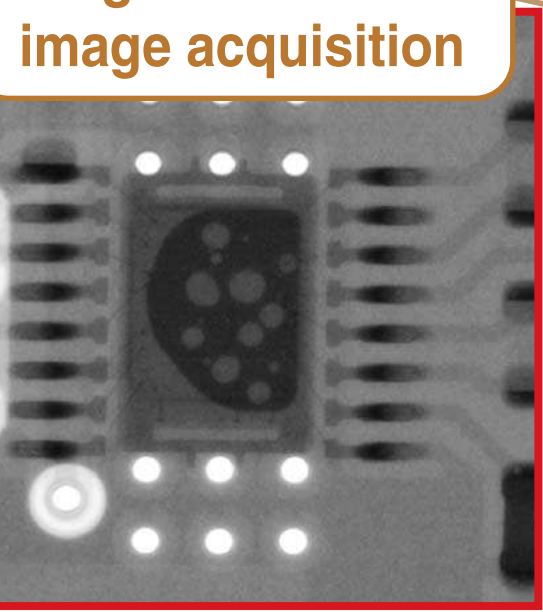

● Resolution chart (2× magnification)

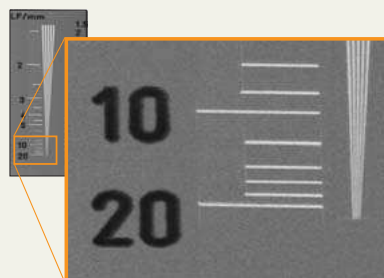

▲ < 16 Line Pair / mm  
= 31  $\mu$ m resolution

\* When the focal size of the X-ray source is large, this value gets worse.

**High Speed**

**High Sensitivity**

**High Resolution**

**TDI technology offers all three simultaneously.**


**Approx. 11 m/min**



Image Galleries


[www.sales.hamamatsu.com/c10650](http://www.sales.hamamatsu.com/c10650)

## ② Lithium-ion Battery

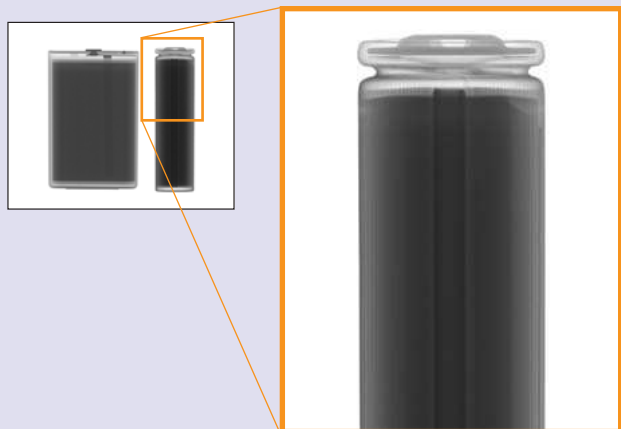

▲ By imaging the internal structure of a lithium battery, foreign materials can be detected.

## ③ Medical

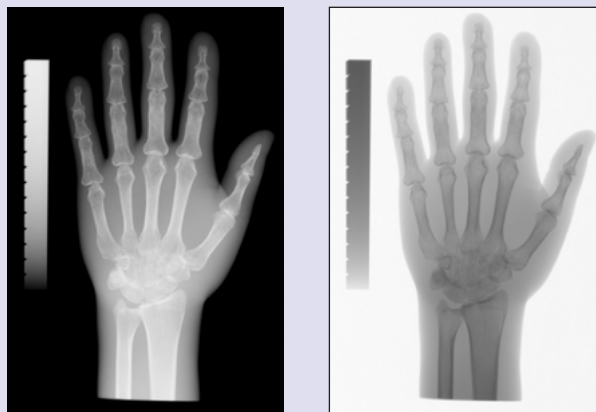

▲ Possible replacement for film in human X-ray imaging

\* The C10650 camera has a narrow irradiation area and performs high-speed imaging, so it requires a reduced dosage. Because it is a digital system, film processing is not required and it is easy to capture and transfer images remotely.


# Select from 3 configurations to fit your application

## SPECIFICATIONS

Type number	C10650-221	C10650-321	C10650-461
CCD pixel number	3072 (H) × 128 (V)	4608 (H) × 128 (V)	6144 (H) × 128 (V)
Active CCD pixel number	3040 (H) × 128 (V)	4608 (H) × 128 (V)	6144 (H) × 128 (V) *
CCD pixel size	48 μm × 48 μm		
X-ray sensitive area	146 mm (H) × 6 mm (V)	221 mm (H) × 6 mm (V)	292 mm (H) × 6 mm (V)
Window	FOS (Fiber optic plate with scintillator)		
X-ray detection range	Approx. 25 kVp to 85 kVp		
X-ray tolerance range	93.5 kVp, 50 W (max.)		
CCD pixel clock	4.0 MHz		
TDI line rate	1 × 1	Max. 2.109 kHz (6.073 m/min)	
	binning 2 × 2	Max. 1.858 kHz (10.702 m/min)	
A/D converter	12 bit		16 bit
Data output	12 bit		16 bit
Interface (Camera Link)	Base Configuration		
Pixel clock (Camera Link)	16.0 MHz		
TDI line rate control **	External mode or internal mode		
A/D gain value ***	0 dB to 20 dB (64 steps)		
Power requirements	DC +15 V (±1 V)		
Power consumption	40 V · A (max.)		50 V · A (max.)

\* Active CCD pixel number will vary due to variations in sensor overlap. \*\* Selectable by serial command \*\*\* A/D gain value (M8815-01) is optional.

## DIMENSIONAL OUTLINES (Unit: mm)

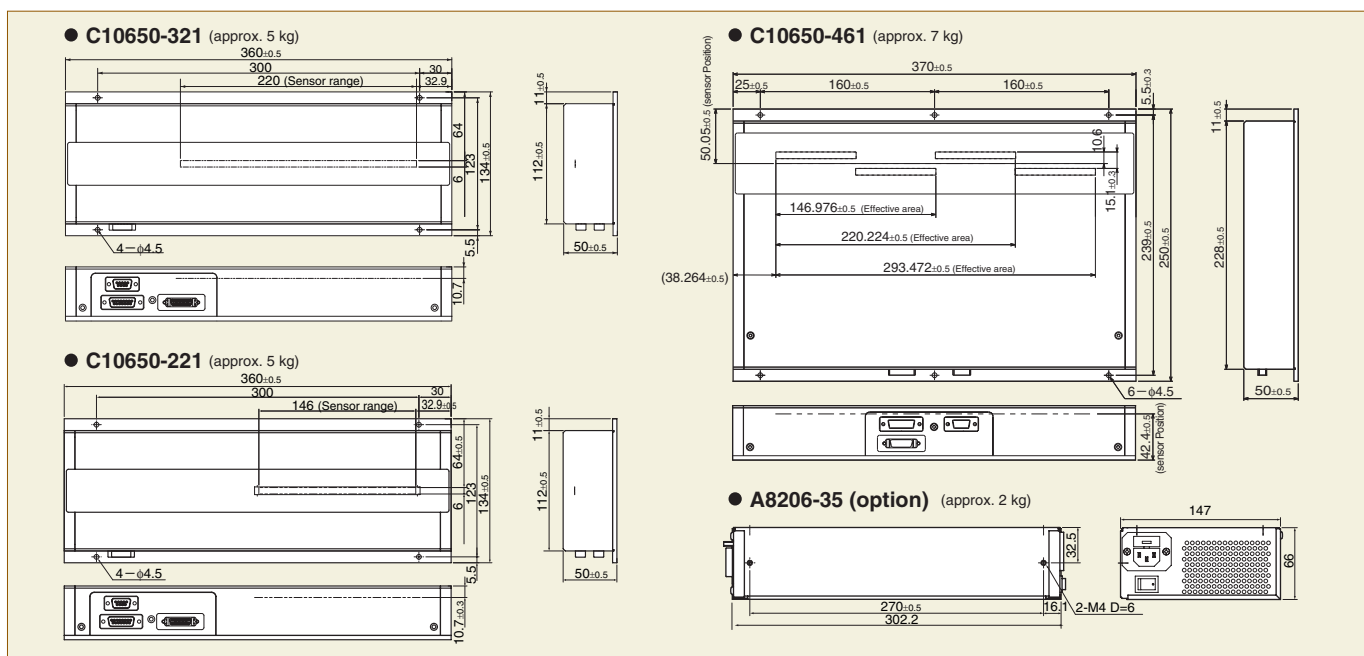

## OPTIONS

● AC adaptor: A8206-35    ● Power cable: A10847-05    ● Software API Support (Microsoft Windows): DCAM-API (<http://www.dcamapi.com>)

- ★ Product and software package names noted in this documentation are trademarks or registered trademarks of their respective manufacturers.
- Subject to local technical requirements and regulations, availability of products included in this promotional material may vary. Please consult with your local sales representative.
- Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications and external appearance are subject to change without notice.

© 2010 Hamamatsu Photonics K.K.

# HAMAMATSU

<http://www.hamamatsu.com>

HAMAMATSU PHOTONICS K.K., Systems Division

812 Joko-cho, Higashi-ku, Hamamatsu City, 431-3196, Japan, Telephone: (81)53-431-0124, Fax: (81)53-435-1574, E-mail: [export@sys.hpk.co.jp](mailto:export@sys.hpk.co.jp)

U.S.A. and Canada: Hamamatsu Corporation, 360 Foothill Road, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-0852, E-mail: [usa@hamamatsu.com](mailto:usa@hamamatsu.com)

Germany: Hamamatsu Photonics Deutschland GmbH, Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 8152-375-0, Fax: (49) 8152-2658, E-mail: [info@hamamatsu.de](mailto:info@hamamatsu.de)

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33) 1 69 53 71 00, Fax: (33) 1 69 53 71 10, E-mail: [infos@hamamatsu.fr](mailto:infos@hamamatsu.fr)

United Kingdom: Hamamatsu Photonics UK Limited, 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire, AL7 1BW, U.K., Telephone: (44) 1707-294888, Fax: (44) 1707-325777, E-mail: [info@hamamatsu.co.uk](mailto:info@hamamatsu.co.uk)

North Europe: Hamamatsu Photonics Norden AB, Smidesvägen 12, SE-171-41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01, E-mail: [info@hamamatsu.se](mailto:info@hamamatsu.se)

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1 int.6-20020 Arese (Milano), Italy, Telephone: (39) 02-935 81 733, Fax: (39) 02-935 81 741, E-mail: [info@hamamatsu.it](mailto:info@hamamatsu.it)

Cat. No. SFAS0025E01  
JUL/2010 HPK