

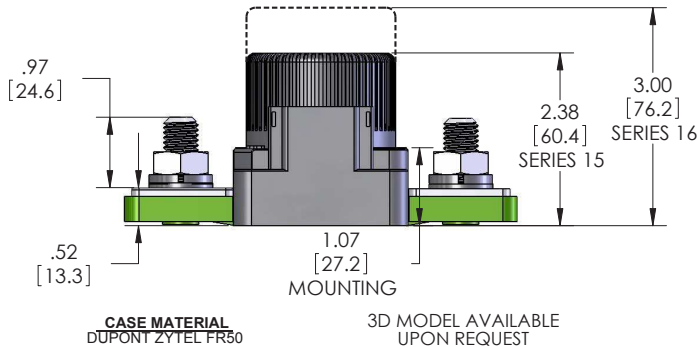


## Over Current Contactor

Automatic trip function  
350 amp and 600 amp versions

**MXSA**  
Smart-Tactor™

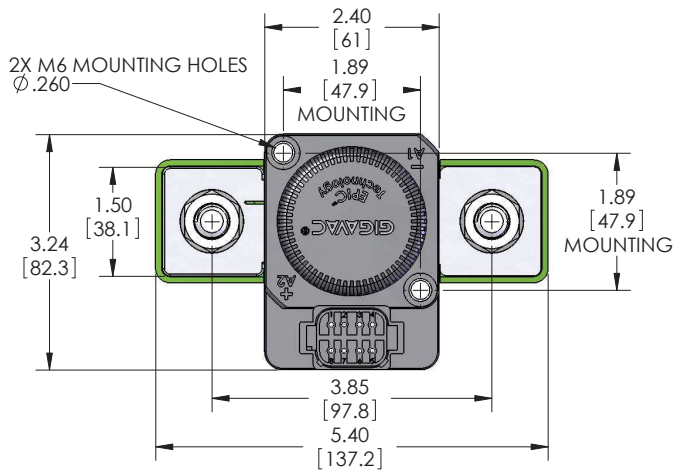

### POWER CONNECTION

ZINC PLATED, M12X1.75 BOLT  
STAINLESS M12X1.75 NUT  
STAINLESS LOCKWASHER  
STAINLESS FLAT WASHER

TORQUE 200-300 IN-LB (22-33 Nm)

MATING DEUTSCH CONNECTOR *	
PART NUMBER	DESCRIPTION
DT06-08SA	CONNECTOR HOUSING
0462-201-16141	SOCKET
114017	SEALING PLUG
HDT-48-00	RECOMMENDED CRIMPER
W8S	WEDGE

\* AVAILABLE AS AN ASSEMBLY (0857-3/4)

### Coil Ratings (25°C, Currents & Power At Nominal V)


Series	15		16		
Coil P/N Designation	B	C	B	C	
Coil Voltage (Nominal)	12	24	12	24	V
Maximum Safe Voltage	16	32	16	32	V
Inrush Current (max, includes both coils)	4.3	1.6	3.8	1.9	A
Hold Current after inrush (max)	0.24	0.09	0.64	0.32	A
Coil Hold Power (max)	2.9	2.1	7.7	7.8	W
Coil Back EMF <sup>1</sup>	0				V
Transient on all pins	+50V 13ms				
Reverse polarity on all pins	-80				V

<sup>1</sup> Coils are switched internally with a FET, so no fly-back/suppression voltage is seen at the coil inputs.

### Key Features

<b>EPIC® Seal</b>	Ceramic to metal braze. Gas filled hermetic chamber protects key components. Exceeds IP69K standard
<b>Contacts / Form</b>	Silver / SPST / NO
<b>Coil</b>	Efficient two coil design with no PWM or EMI emissions.
<b>Suppression</b>	Coil suppression built in
<b>High Shock and Vibration</b>	For rugged environments, off-road and tracked vehicles
<b>Installation</b>	Not direction sensitive
<b>Reference</b>	MIL-R-6106, RoHS

### Current Carry

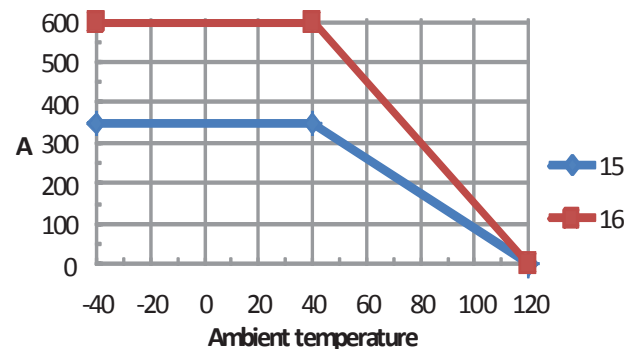


Environmental And Switching Specification					
Series	15		16		
Contacts					
Contact form	SPST-NO				
Contact Voltage Rating	12-48V				
Insulation resistance, A1-A2 and A1&A2 to controls	500V, 100MΩ (50MΩ after life)				
Dielectric, A1-A2 and A1&A2 to controls	2200VAC, 60Hz, 1mA				
Contact Resistance (max)	1.5 mΩ (.4 avg)				
Current (see chart for Temp. derating)	350A 400MCM		600A 500MCM		
90s	1000A		1500A		
10s	2000A		3000A		
1s	3000A		4000A		
Optional Aux, SPST, NO or NC	2A @ 28V				
Resistive Load Switching					
Fault interrupt	3000A		5000A		
Resistive switching @ 28V	100,000 cycles @ 350A		100,000 cycles @ 600A		
Please contact factory for more detailed resistive switching specifications.					
Mechanical life	300,000 cycles				
Environmental Specifications					
Weight (Max, with hardware)	1.6lbs, 725g		2lbs, 910g		
Vibration (10 - 2000Hz)	15G				
Shock, 1/2 Sine, 11ms	20G				
Temperature Range (ambient)	-40°C to 85°C				
Max Terminal Temperature	125°C				
Water Resistance	IP67 and IP69K				
Seal: Hermetic Vacuum Braze, tested to E-9 std cc/sec					
Steam/Water-Jet/ Boiling Water	105psi Steam/2750psi Jet/ Submersion in BW				
Chemicals, Corrosion, Fungal Growth	Resistant				
Timing (Max Values @ 25°C)					
Operate (including bounce)	20				ms
Inrush	75				ms
Release	12		7		ms
For details, contact factory for App. Note	8	9	12	13	#

#### NOTES:

- With power applied to Vin, the contacts will close when Vcontrol is greater than Vcontrol\_Close and open when Vcontrol is less than Vcontrol\_Open (see Features chart for values). Connect Vcontrol to Vin to disable logic level control.
- When the trip limit is exceeded the contacts will open and the Trip indicator line will go low. The TRIP pin is an open drain.
- Connect resistor Rx as shown in red to set the current trip level. Choose Rx using the equation in the Features Table.
- Contactors has two coils. Both are used for pull-in. After approximately 75 milliseconds, one coil is electronically removed from the coil drive circuit. The remaining coil supplies low continuous hold power sufficient for the contactor to meet all of its specified performance specifications. This provides the lowest coil power possible without the use of PWM electronics that have been known to cause EMI emissions and/or crosstalk on system control power.
- Current Sense: Indicates the current through the main contacts (A2 and A1). The current sense range is from -600 to +600 amps.

Pin 1: 0V to 5V, Vout = (I/240) + 2.5

Ordering Key	
<b>MXSA</b>	EX: MXSA16CEB
SERIES 15=350A 16=600A	AUXILIARY B=SPST, NO C=SPST, NC BLANK=NONE
COIL VOLTAGE B=12VDC C=24VDC	CONNECTOR E=DEUTSCH DT08 CONNECTOR

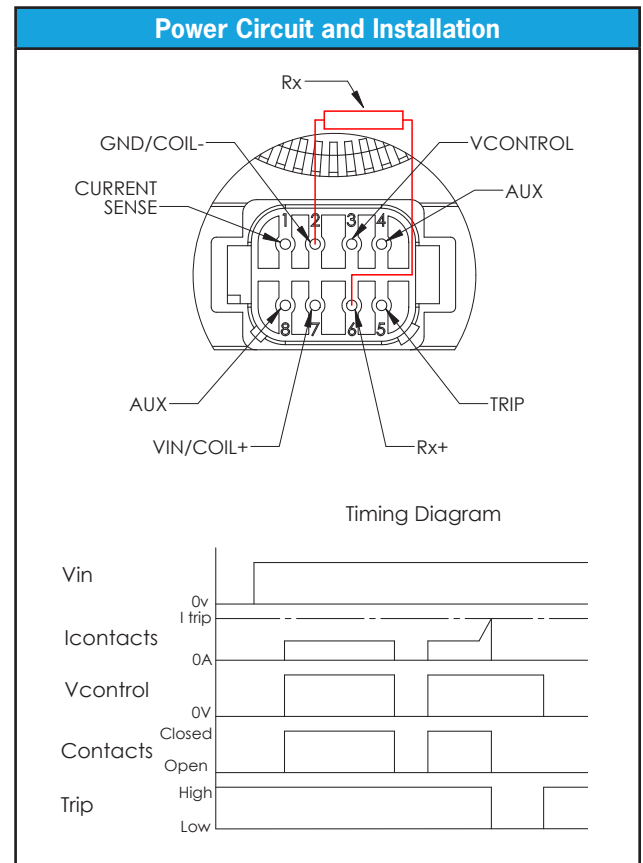

Settings Parameters			
Coil Voltage	B	C	
Vin Input Voltage Range	10-16	20-30	V
Vcontrol Pin (100kΩ input resistance)	32V max		V
Vcontrol_Close	2.5		V
Vcontrol_Open	1.5		V
Current Trip Setting Range	±(20-600)		A
Rx Value (I_Trip is the trip level in Amps)	$R_x = 100k\Omega * I_{Trip} / 600A$		A
Current Sense Accuracy	±7%		
Over Current Response Time	2ms + release time		ms

<b>GIGAVAC®</b>		P.O. Box 4428 Santa Barbara, CA 93140
<a href="http://www.gigavac.com">www.gigavac.com</a>	<a href="mailto:info@gigavac.com">info@gigavac.com</a>	+805-684-8401
Rev 4 6-19-13	© 2013 GIGAVAC, LLC	Page 2 of 2 MXSA