


## Silicon NPN Epitaxial Planar

## 2SC3930

## ■ Features

- Optimum for RF amplification of FM/AM radios.
- High transition frequency fr.

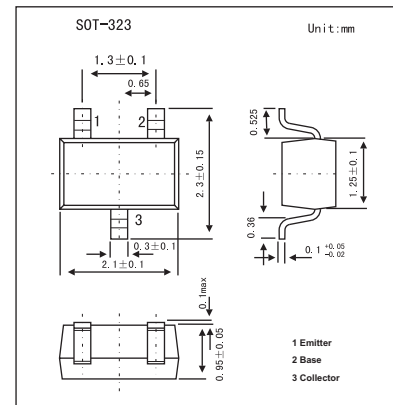

## ■ Absolute Maximum Ratings Ta = 25°C

| Parameter                   | Symbol           | Rating      | Unit |
|-----------------------------|------------------|-------------|------|
| Collector-base voltage      | V <sub>CB0</sub> | 30          | V    |
| Collector-emitter voltage   | V <sub>CEO</sub> | 20          | V    |
| Emitter-base voltage        | V <sub>EBO</sub> | 5           | V    |
| Collector current           | I <sub>C</sub>   | 30          | mA   |
| Collector power dissipation | P <sub>C</sub>   | 150         | mW   |
| Junction temperature        | T <sub>j</sub>   | 150         | °C   |
| Storage temperature         | T <sub>stg</sub> | -55 to +150 | °C   |

## ■ Electrical Characteristics Ta = 25°C

| Parameter                      | Symbol           | Testconditions   | Min | Typ | Max | Unit |
|--------------------------------|------------------|--|-----|-----|-----|------|
| Collector-base cutoff current  | I <sub>CBO</sub> | V <sub>CB</sub> = 10 V, I <sub>E</sub> = 0                   |     |     | 0.1 | μA   |
| Forward current transfer ratio | h <sub>FE</sub>  | V <sub>CB</sub> = 10 V, I <sub>E</sub> = -1 mA               | 70  |     | 220 |      |
| Transition frequency           | f <sub>T</sub>   | V <sub>CB</sub> = 10 V, I <sub>E</sub> = -1 mA, f = 200 MHz  | 150 | 250 |     | MHz  |
| Noise figure                   | N <sub>f</sub>   | V <sub>CB</sub> = 10 V, I <sub>E</sub> = -1 mA, f = 5 MHz    |     | 2.8 | 4.0 | dB   |
| Reverse transfer impedance     | Z <sub>rb</sub>  | V <sub>CB</sub> = 10 V, I <sub>E</sub> = -1 mA, f = 2 MHz    |     | 22  | 50  | Ω    |
| Reverse transfer capacitance   | C <sub>re</sub>  | V <sub>CB</sub> = 10 V, I <sub>E</sub> = -1 mA, f = 10.7 MHz |     | 0.9 | 1.5 | pF   |

## ■ hFE Classification

| Marking | VB     | VC      |
|---------|--------|---------|
| hFE     | 70~140 | 110~220 |