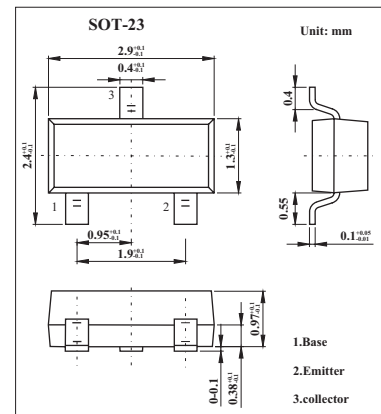


PNP Silicon Switching Transistors

BSS80,BSS82

■ Features

- High DC current gain: 0.1mA to 500 mA.
- Low collector-emitter saturation voltage.

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	BSS80	BSS82	Unit
Collector-emitter voltage	V_{CE0}	40	60	V
Collector-base voltage	V_{CB0}	60		V
Emitter-base voltage	V_{EB0}	5		V
Collector current	I_C	800		mA
Peak collector current	I_{CM}	1		A
Base current	I_B	100		mA
Peak base current	I_{BM}	200		mA
Total power dissipation, $T_s = 77^\circ\text{C}$	P_{tot}	330		mW
Junction temperature	T_j	150		$^\circ\text{C}$
Storage temperature	T_{stg}	-65 to +150		$^\circ\text{C}$
Junction - soldering point	R_{thJS}	≤ 220		K/W

BSS80, BSS82■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit	
Collector-emitter breakdown voltage	BSS80	$I_c = 10\text{ mA}, I_B = 0$	40			V	
	BSS82		60				
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_c = 10\text{ }\mu\text{A}, I_E = 0$	60			V	
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 10\text{ }\mu\text{A}, I_c = 0$	5			V	
Collector cutoff current	I_{CBO}	$V_{CB} = 50\text{ V}, I_E = 0$			10	nA	
		$V_{CB} = 50\text{ V}, I_E = 0, T_A = 150^\circ\text{C}$			10	μA	
Emitter cutoff current	I_{EBO}	$V_{EB} = 3\text{ V}, I_c = 0$			10	nA	
DC current gain *	BSS80/82B	$I_c = 100\text{ }\mu\text{A}, V_{CE} = 10\text{ V}$	40			V	
	BSS80/82C		75				
	BSS80/82B	$I_c = 1\text{ mA}, V_{CE} = 10\text{ V}$	40				
	BSS80/82C		100				
	BSS80/82B	$I_c = 10\text{ mA}, V_{CE} = 10\text{ V}$	40				
	BSS80/82C		100				
	BSS80/82B	$I_c = 150\text{ mA}, V_{CE} = 10\text{ V}$	40		120		
	BSS80/82C		100		300		
	BSS80/82B	$I_c = 500\text{ mA}, V_{CE} = 10\text{ V}$	40				
	BSS80/82C		50				
Collector-emitter saturation voltage *	$V_{CE(sat)}$	$I_c = 150\text{ mA}, I_B = 15\text{ mA}$			0.4	V	
		$I_c = 500\text{ mA}, I_B = 50\text{ mA}$			1.6		
Base-emitter saturation voltage *	$V_{BE(sat)}$	$I_c = 150\text{ mA}, I_B = 15\text{ mA}$			1.3		
		$I_c = 500\text{ mA}, I_B = 50\text{ mA}$			2.6		
Transition frequency	f_T	$I_c = 20\text{ mA}, V_{CE} = 20\text{ V}, f = 100\text{ MHz}$		250			MHz
Collector-base capacitance	C_{cb}	$V_{CB} = 10\text{ V}, f = 1\text{ MHz}$		6			pF
Delay time	t_d	$V_{CC} = 30\text{ V}, I_c = 150\text{ mA}, I_{B1} = 15\text{ mA}, V_{BE(off)} = 0.5\text{ V}$			10	ns	
Rise time	t_r	$V_{CC} = 30\text{ V}, I_c = 150\text{ mA}, I_{B1} = 15\text{ mA}, V_{BE(off)} = 0.5\text{ V}$			40	ns	
Storage time	t_{stg}	$V_{CC} = 30\text{ V}, I_c = 150\text{ mA}, I_{B1} = I_{B2} = 15\text{ mA},$			80	ns	
Fall time	t_f	$V_{CC} = 30\text{ V}, I_c = 150\text{ mA}, I_{B1} = I_{B2} = 15\text{ mA},$			30	ns	

* Pulse test: $t \leq 300\mu\text{s}, D = 2\%$.

■ hFE Classification

TYPE	BSS80	
Rank	B	C
Marking	CHs	CJs

TYPE	BSS82	
Rank	B	C
Marking	CLs	CMs