


PNP General Purpose Amplifier

MMBT4403

Features

- Ideal for Medium Power Amplification and Switching
- Complementary NPN Type Available (MMBT4401)

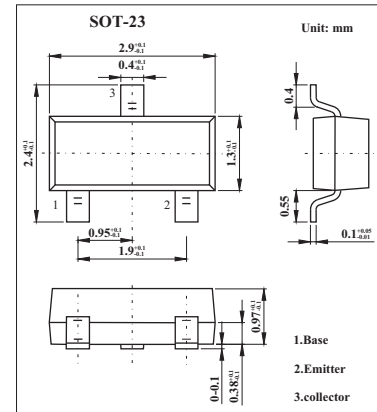

Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

| Parameter | Symbol | Rating | Unit |
|--|-----------------|------------|---------------------------|
| Collector-base voltage | V_{CB0} | -40 | V |
| Collector-emitter voltage | V_{CEO} | -40 | V |
| Emitter-base voltage | V_{EB0} | -5 | V |
| Collector current | I_C | -600 | mA |
| Total Device Dissipation Alumina Substrate | P_D | 300 | mW |
| Thermal Resistance, Junction to Ambient | $R_{\theta JA}$ | 417 | $^\circ\text{C}/\text{W}$ |
| Junction and Storage Temperature | T_J, T_{stg} | -55 to 150 | $^\circ\text{C}$ |

Electrical Characteristics $T_a = 25^\circ\text{C}$

| Parameter | Symbol | Test conditons | Min | Typ | Max | Unit |
|--|---------------|--|-----|-----|-------|---------------|
| Collector-base breakdown voltage | $V_{(BR)CBO}$ | $I_C = 100\mu\text{A}, I_E = 0$ | -40 | | | V |
| Collector-emitter breakdown voltage | $V_{(BR)CEO}$ | $I_C = 1.0\text{ mA}, I_B = 0$ | -40 | | | V |
| Emitter-base breakdown voltage | $V_{(BR)EBO}$ | $I_E = 100\mu\text{A}, I_C = 0$ | -5 | | | V |
| Collector cut-off current | I_{CBO} | $V_{CB} = -35\text{ V}, I_E = 0$ | | | -0.1 | μA |
| Emitter cut-off current | I_{EBO} | $V_{EB} = -4\text{ V}, I_C = 0$ | | | -0.1 | μA |
| DC current gain * | h_{FE} | $I_C = -0.1\text{ mA}, V_{CE} = -1.0\text{ V}$ | 30 | | | |
| | | $I_C = -1.0\text{ mA}, V_{CE} = -1.0\text{ V}$ | 60 | | | |
| | | $I_C = -10\text{ mA}, V_{CE} = -1.0\text{ V}$ | 100 | | | |
| | | $I_C = -150\text{ mA}, V_{CE} = -2.0\text{ V}$ | 100 | | 300 | |
| | | $I_C = -500\text{ mA}, V_{CE} = -2.0\text{ V}$ | 20 | | | |
| Collector-emitter saturation voltage * | $V_{CE(sat)}$ | $I_C = -150\text{ mA}, I_B = -15\text{ mA}$ | | | -0.4 | V |
| | | $I_C = -500\text{ mA}, I_B = -50\text{ mA}$ | | | -0.75 | |
| Base-emitter saturation voltage * | $V_{BE(sat)}$ | $I_C = 150\text{ mA}, I_B = 15\text{ mA}$ | | | -0.95 | V |
| | | $I_C = 500\text{ mA}, I_B = 50\text{ mA}$ | | | -1.3 | |
| Transition frequency | f_T | $I_C = 20\text{ mA}, V_{CE} = 10\text{ V}, f = 100\text{ MHz}$ | 200 | | | MHz |
| Delay time | t_d | $V_{CC} = 30\text{ V}, V_{EB} = 2.0\text{ V},$ | | | 15 | ns |
| Rise time | t_r | $I_C = 150\text{ mA}, I_{B1} = 15\text{ mA}$ | | | 20 | ns |
| Storage time | t_s | $V_{CC} = 30\text{ V}, I_C = 150\text{ mA},$ | | | 225 | ns |
| Fall time | t_f | $I_{B1} = I_{B2} = 15\text{ mA}$ | | | 30 | ns |

* Pulse test: pulse width 300 μs , duty cycle 2.0%.

PNP General Purpose Amplifier

MMBT4403

Electrical Characteristics Ta = 25°C

| Parameter | Symbol | Test conditons | Min | Typ | Max | Unit |
|--|----------|---|------------------------------|-----|---------------|------|
| Collector-base breakdown voltage | V(BR)CBO | Ic = 100μA, IE = 0 | -40 | | | V |
| Collector-emitter breakdown voltage | V(BR)CEO | Ic = 1.0 mA, IB = 0 | -40 | | | V |
| Emitter-base breakdown voltage | V(BR)EBO | IE = 100μA, IC = 0 | -5 | | | V |
| Collector cut-off current | ICBO | VCE = -35 V, IE = 0 | | | -0.1 | μA |
| Emitter cut-off current | IEBO | VEB = -4V, IC = 0 | | | -0.1 | μA |
| DC current gain * | hFE | Ic = -0.1 mA, VCE = -1.0 V Ic = -1.0 mA, VCE = -1.0 V Ic = -10 mA, VCE = -1.0 V Ic = -150 mA, VCE = -2.0 V Ic = -500 mA, VCE = -2.0 V | 30 60 100 100 20 | | 300 | |
| Collector-emitter saturation voltage * | VCE(sat) | Ic = -150 mA, IB = -15 mA Ic = -500 mA, IB = -50 mA | | | -0.4 -0.75 | V |
| Base-emitter saturation voltage * | VBE(sat) | Ic = 150 mA, IB = 15 mA Ic = 500 mA, IB = 50 mA | | | -0.95 -1.3 | V |
| Transition frequency | fr | Ic = 20 mA, VCE = 10 V, f = 100 MHz | 200 | | | MHz |
| Delay time | td | VCC = 30 V, VEB = 2.0 V, | | | 15 | ns |
| Rise time | tr | Ic = 150 mA, IB1 = 15 mA | | | 20 | ns |
| Storage time | ts | VCC = 30 V, Ic = 150 mA, | | | 225 | ns |
| Fall time | tf | IB1 = IB2 = 15 mA | | | 30 | ns |

* Pulse test: pulse width 300 μs, duty cycle 2.0%.

Marking

| | |
|---------|----|
| Marking | 2T |
|---------|----|