


LFB Series Large Ferrite Bobbin Coils

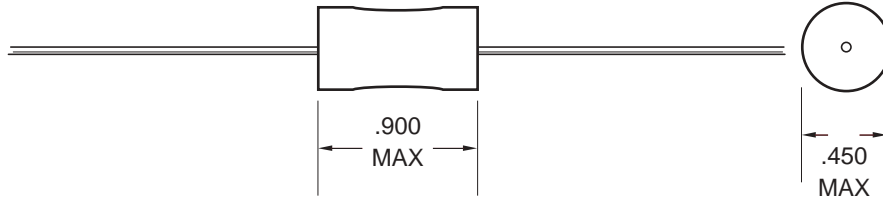

Wilco Part Number	L uh +/- 15%	R.D.C. OHMS MAX.	Saturation Current (DC AMPS)	1 AMPS Suggested Rating	TEST FREQ.
LFB 39G	3.9	.007	15.5	4.0	1 KHz
LFB 68G	6.8	.011	11.5	4.0	1 KHz
LFB 100	10	.017	8.70	4.0	1 KHz
LFB 180	18	.023	6.64	4.0	1 KHz
LFB 330	33	.032	4.82	4.0	1 KHz
LFB 470	47	.035	3.98	4.0	1 KHz
LFB 680	68	.047	3.31	2.5	1 KHz
LFB 101	100	.080	2.79	1.6	1 KHz
LFB 151	150	.107	2.22	1.6	1 KHz
LFB 221	220	.150	1.89	1.6	1 KHz
LFB 331	330	.183	1.51	1.6	1 KHz
LFB 471	470	.281	1.24	1.2	1 KHz
LFB 561	560	.380	1.17	1.0	1 KHz
LFB 681	680	.420	1.05	1.0	1 KHz
LFB 102	1000	.655	.87	0.8	1 KHz
LFB 152	1500	1.04	.70	0.6	1 KHz
LFB 222	2200	1.56	.58	0.5	1 KHz
LFB 332	3300	2.53	.47	0.4	1 KHz
LFB 472	4700	3.19	.39	0.4	1 KHz
LFB 682	6800	5.69	.322	.250	1 KHz
LFB 103	10000	7.30	.266	.250	1 KHz
LFB 153	15000	10.5	.214	.200	1 KHz
LFB 223	22000	21.8	.180	.125	1 KHz
LFB 333	33000	25.7	.146	.125	1 KHz
LFB 473	47000	36.1	.122	.100	1 KHz
LFB 683	68000	57.3	.101	.082	1 KHz
LFB 104	100000	89.7	.081	.065	1 KHz

FEATURES

- Leads No. 20 Tinned Copper 1.5" long
- Coils Finished with VWI rated sleeving
- Nonstandard Values Available
- Saturation Current Lowers Inductance 5%
- Available Taped and Reeled for Auto Insertion

APPLICATIONS

- Switching power supplies
- SCR and Triac controls
- Switching regulators

Wilco Corporation

6451 Saguro Ct.
Indianapolis, IN 46268
Hotline 800•611•2343
Fax 317•293•9462
www.wilcocorp.com