



5300 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)577-9887
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 7000

1.0MHz – 2.5GHz
FOUR CHANNEL
BROADBAND POWER RF AMPLIFIER


Solid State Broadband High Power RF Amplifier

The 7000 is a 100/50 Watt broadband system that covers the 1 – 2500 MHz frequency range. This small and lightweight system utilizes Class A/AB linear power devices that provide high gain, excellent efficiency and a wide dynamic range.

The 7000 comes with a RS232 controller and a front panel display in a Rear panel Connectors configuration.

	Parameter	Specification @ 25° C
Electrical		
1	Frequency Range	CH 1. 1-30MHz CH 2. 30-500MHz CH 3. 500-1000MHz CH 4. 1.0 – 2.5GHz
2	Saturated Output Power	CH 1, 2 and 3: 100 Watts typical CH 4. 50Watts typical
3	Power Output @ 1dB Comp.	CH. 1, 2 and 3: 60 Watts Ch. 4: 40 Watts
4	Small Signal Gain	CH 1, 2 and 3: +50 dB min CH 4: +47 dB min
5	Small Signal Gain Flatness	± 2.0 dB max
6	Input VSWR	2:1 max
7	Harmonics	CH 1. -20dBc typ. @ 60W CH 2. -15dBc typ. @ 60W CH 3. -40dBc typ. @ 60W CH 4. -20dBc typ. @ 40W
8	Spurious Signals	-60 dBc typical @ P1dB
9	Input/Output Impedance	50 Ohms nominal
10	AC Input Power (only one channel transmit at a time)	CH 1. 250 Watts max. CH 2. 400 Watts max. CH 3. 700 Watts max. CH 4. 350 Watts max.
11	AC Input	100 – 240 VAC, single phase
12	RF Input drive required for Psat	0 dBm
13	Max. RF drive without damage	+ 3 dBm
Mechanical		
14	Dimensions	19" x 8.75" x 26"
15	Weight	95 lb. max
16	Connectors	Type-N
17	Grounding	Chassis
18	Cooling	Internal Forced Air
Environmental		
19	Operating Temperature	0° C to +50° C
20	Operating Humidity	95% Non-condensing
21	Operating Altitude	Up to 10,000' Above Sea Level
22	Shock and Vibration	Normal Truck Transport


Specifications subject to change without notice

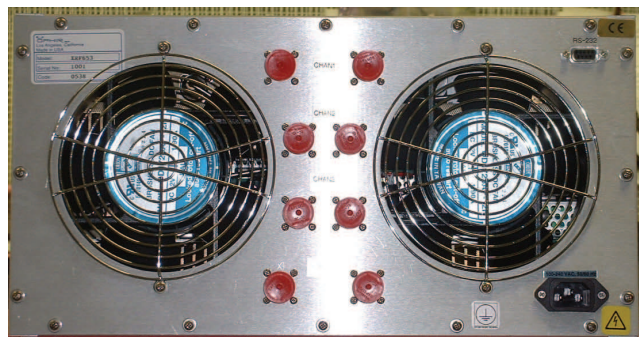



5300 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)577-9887
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 7000
1.0MHz – 2.5GHz
FOUR CHANNEL
BROADBAND POWER RF AMPLIFIER

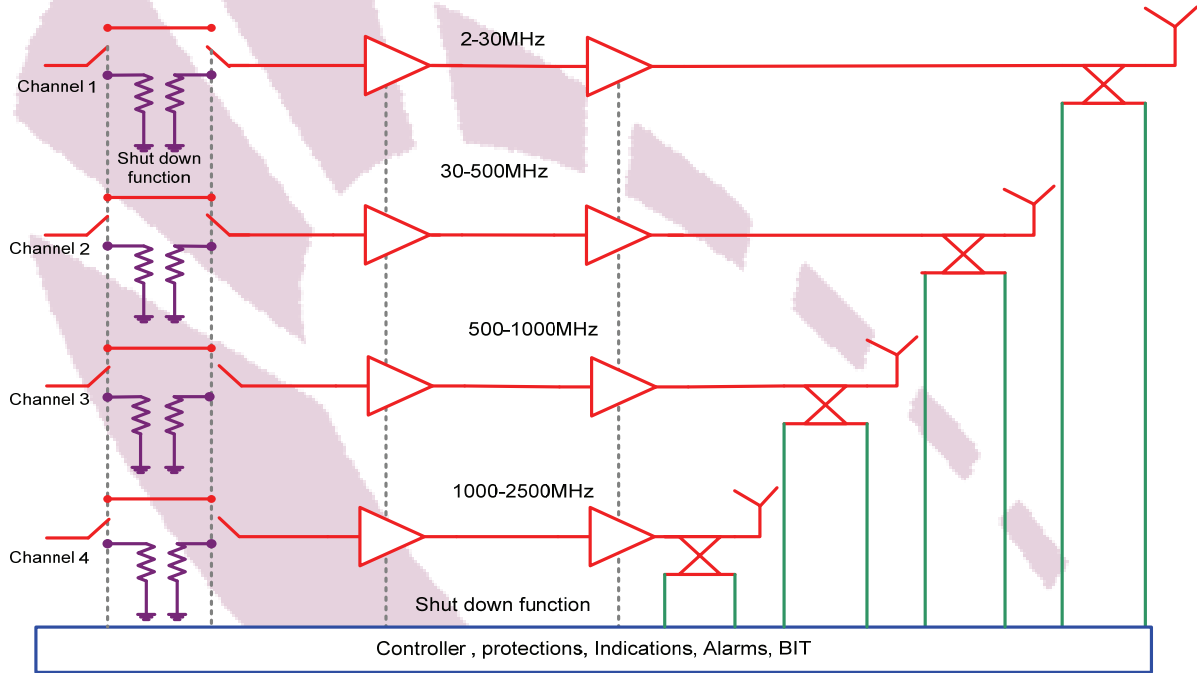

CIRCUIT PROTECTIONS

- ◇ Protection against VSWR of > 2.5:1 , latched with Reset
- ◇ Thermal Overload
- ◇ Over Current
- ◇ Over Voltage

CONTROL & INDICATIONS

- ◇ AC Circuit Breaker
- ◇ Band Select
- ◇ Forward power of selected channel
- ◇ Reflected Power of selected channel
- ◇ VSWR Fault Reset