

Lever-type Detector Switches

SW1AB-500-T11

Features

- ◇Miniaturized for space saving design.
- ◇Superior reliability at micro-current by employing a sliding contact.
- ◇This is a compact detector switch which can be pressed either horizontally or vertically.
- ◇Reflow soldering is possible.




Zoom

Applications

- ◇Mechatronic detection for audio and VCR Digital cameras.

Products Number System

SW [] AB - [][][] - [][]

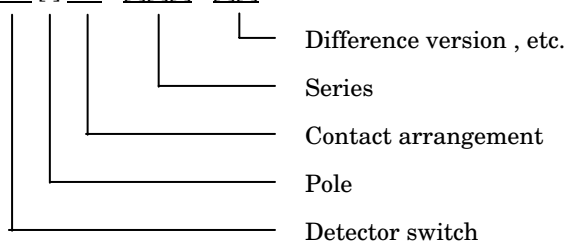

Actual size

Products Line


No	Products No	Pole	Position	Quantity (pcs./reel)	Notes
1	SW1AB-500-T11	1	1	1,100	

Typical Specifications

Item	Specification
Ratings (max.)	0.05 to 10mA 3 to 5V DC (Resistive load)
Contact resistance	1 ohm max.
Insulation resistance	100 megohm min. 100V DC
Withstanding voltage	100V AC for 1min.
Operating life with load	50,000 cycles
Operating force	0.25N max.

] Dimensions

Unit : mm

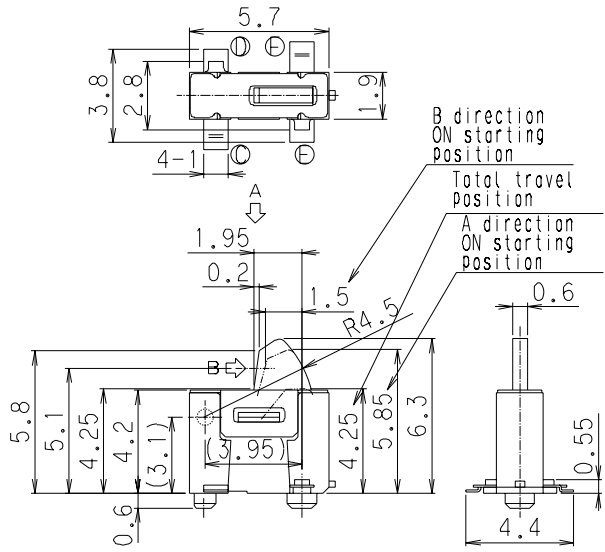No	Style	P.C.B reference Land Dimensions Circuit diagram (TOP VIEW)
1	SW1AB-500-T11  <p>Technical drawing of the SW1AB-500-T11 switch. It includes a top view, a side view, and a detail view of the actuator. Dimensions are provided in millimeters. Key dimensions include: 5.7 (width), 3.8 (height), 2.8 (height), 1.9 (height), 4-1 (width), 1.95 (height), 0.2 (height), 1.5 (height), R4.5 (radius), 5.8 (total length), 5.1 (length), 4.25 (length), 4.2 (length), 3.1 (length), 0.6 (width), 4.25 (length), 5.85 (length), 6.3 (length), 0.95 (radius), 0.6 (width), 4.4 (width), and 0.55 (height). Movement directions are labeled: 'B direction ON starting position', 'Total travel position', and 'A direction ON starting position'.</p>	 <p>P.C.B reference Land Dimensions and Circuit diagram (TOP VIEW). The top view shows dimensions: 1.1 (width), 1.3 (width), 4 (width), 2.4 (width), 5.4 (width), 2-1.4 (width), 3.5 (width), 1.3 (width), and 3 (width). The circuit diagram shows a switch with two terminals.</p>

[] Notes

- The appearance and specifications of the product may be modified to improve its performance without prior notice.
- This catalog shows only outline specifications. When using the product, please obtain formal specifications.
- Please see appendix [Cautions in Using Switches].
- This switch is not washable.
- Soldering shall be done with actuator at free position and take care not to attach flux on plastic portion.
- Note that if the stress is applied to the terminals during soldering, they might cause deformation and defects in electrical performance.
- In manual soldering, consideration should be given to apply the soldering iron to the tip of the terminal so that unusual pressure is not applied to the terminal.
- In case circuit and software design consideration against chattering and bouncing shall be taken as below.
 - Read a few times. (Ex. 5ms for 5 times)
 - Set delay time.
 - Set integral circuit.
- As to threshold voltage, center setting is recommended.
- Care shall be taken not to apply stress to the body of switch as it may affect the performance.
- Please confirm the performance on actual operation by simulation with actual environment environments for high reliability.