



# TECHNICAL Practice

TELECOM SOLUTIONS FOR THE 21ST CENTURY

## ERAM-4M

Four Minute Memory Expansion Kit for the AES-2000

July 10, 2001

## Expand the Record Time/Names of the AES-2000



The **ERAM-4M** Memory Expansion Kit is designed to expand the voice record memory of the **AES-2000** using non-volatile memory.

Each kit includes one 28 pin non-volatile memory chip which provides four minutes of record time, equivalent to 75 names.

The number of chips required is dependant on the desired number of names. The **AES-2000** is factory configured for 75 names, expandable to accommodate up to 525 names.

Model	# of Kits	Factory Record Time	Maximum Record Time
AES-2000	up to 6	75 names (4 minutes)	525 names (24 minutes)

Phone...715.386.8861

## Specifications


**Environmental:** -26° C to 54° C (-15° F to 130° F) with 5% to 95% non-condensing humidity

**Description:** (1) 28-pin ERAM chip (4 minutes of record time)


## Installation

**Important:** Electronics components are sensitive to static electricity. Personnel and the work area should be grounded before handling.

1. Unlock and open the **AES-2000** front panel.
2. Disconnect the power to the **AES-2000**.
3. Remove the (4) screws holding the inner shroud and remove the shroud.
4. Insert the **ERAM** chip(s) carefully into the appropriate socket(s) with the indents facing as shown.
5. Replace the inner shroud, be careful not to pinch the panel cables.
6. Reconnect the power to the **AES-2000**.



<http://www.vikingelectronics.com>

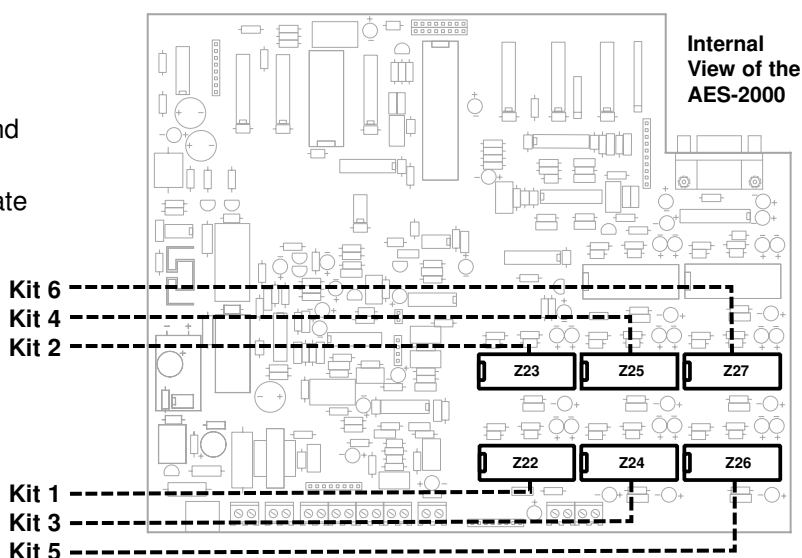

Product Support Line...715.386.8666

Fax Back Line...715.386.4345

Due to the dynamic nature of the product design, the information contained in this document is subject to change without notice. Viking Electronics, and its affiliates and/or subsidiaries assume no responsibility for errors and omissions contained in this information. Revisions of this document or new editions of it may be issued to incorporate such changes.