

Advanced 3G/HD/SD-SDI Waveform Rasterizer

WVR8300 • WVR8200 Data Sheet

Features & Benefits

- Video/Audio/Data Monitor and Analyzer – All in One Platform
 - WVR8300 and WVR8200 come standard with auto-detection of HD/SD-SDI and multiple Dual Link video formats
 - Optional capabilities include 3G-SDI (Level A and Level B) formats support (Opt. 3G), composite analog video support (Opt. CPS), as well as analog and digital audio (Opt. AD) and Dolby E, Dolby Digital Plus, and Dolby Digital audio (Opt. DPE) decoding and monitoring
 - WVR8300 also comes standard with Simultaneous Input Monitoring capability, ANC Data Inspector, and numerical/graphical display of A/V delay for analog, digital (with Opt. AD), and Dolby (Opt. DPE)
 - Multiple Input Mode allows monitoring of 2 to 4 SDI inputs simultaneously (4-input mode requires Opt. 2SDI)
- Superior Physical Layer Signal Integrity Analyzer
 - Most accurate 3G-SDI jitter waveform display and eye pattern display in the waveform series and patented cable length measurement (WVR8300 Opt. PHY with Opt. 3G or WVR8200 Opt. PHY3 with Opt. 3G)
 - Most comprehensive eye pattern measurements including eye amplitude, rise/fall time, and overshoot/undershoot measurements as well as Tektronix jitter waveform display (WVR8300 Opt. PHY or WVR8200 Opt. PHY3)
 - Field-upgradeable HD/SD-SDI eye pattern input module to full 3G-SDI and HD/SD-SDI support with the purchase of an upgrade key (WVR8300UP Opt. 3G or WVR8200UP Opt. 3G)
- Black Picture and Tektronix-patented Frozen Picture Detection
- Tektronix-patented Timing and Lightning Displays Facilitate Accurate Adjustment of Critical Plant Timing
- New Tektronix-patented Spearhead Display and Luma Qualified Vector (LQV™) Display Facilitate Precise Color Adjustment for Post Production Applications (Opt. PROD)
- Tektronix-patented Diamond and Arrowhead Displays for Gamut Monitoring
- Most Comprehensive Audio Monitoring (Opt. AD or Opt. DPE)
 - Multichannel Surround Sound*1 display and flexible Lissajous display
 - Audio Loudness monitoring to ITU-R BS. 1770-2 (Opt. AD or DPE)
 - Comprehensive Dolby metadata decode and display (Opt. DPE)
 - Dolby E Guard Band meter with user-defined limits (Opt. DPE)
- Most Comprehensive ANC Data Monitoring
 - Simultaneous CEA708/608 Closed Caption monitoring; Teletext and OP47 subtitle monitoring
 - Detect and decode ANC data including AFD, WSS, Video Index, TSID, V-Chip, Broadcast Flag/CGMS-A, VITC, LTC, and ANC TC ARIB STD-B35/B37/B39, TR-B22, and TR-B23 support
- Most In-depth Digital Data Analysis Helps Quickly Resolve Difficult Content Quality and Reliability Issues (Standard on WVR8300 and available as Option DAT on WVR8200)
- Unmatched Display Versatility
 - FlexVu™, the most flexible four-tile display, tailors to various application needs to increase productivity
 - Standard and user-definable Safe Area Graticules facilitate editing and format conversions tasks, reducing the need for reworks
 - Active Format Description (AFD) detect, decode, and automatically adjusted graticule on picture display enable easy identification of aspect-ratio related issues
- Unmatched Usability
 - CaptureVu® advanced video frame data capture simplifies troubleshooting and equipment setup
 - 32 instrument presets for quick recall of commonly used configurations tailored to engineers or operators
 - Front-panel USB port enables easy transfer of presets, captured video frame data, screenshots, and error log
 - Front-panel headphone port enables quick verification of selected audio pair
 - Intuitive menu structure and context-sensitive help
 - Extensive alarms, status reporting, and error logging
 - SNMP and Ethernet remote interface capabilities and GPI control facilitate centralized monitoring and control

Analysis (including ANC Data Inspector), A/V Delay Measurement, and in-depth Simultaneous Input Monitoring which makes Tektronix the brand of choice for applications that require deep signal and content analysis with unquestionable accuracy.

The WVR8300 features the complete range of options of the product family and comes standard with HD/SD-SDI and Dual Link video formats support. It provides high-performance monitoring and measurement for applications for a wide range of formats from Composite Analog to SD-SDI, HD-SDI, Dual Link video formats, and 3G-SDI video signals. The WVR8300 offers support for a variety of audio formats for analog, digital AES/EBU, digital embedded, Dolby Digital, Dolby Digital Plus, and Dolby E.

- Video Monitoring Standards and Formats
 - 3G-SDI (Level A and Level B) – Option 3G
 - High Definition SDI – Standard
 - Standard Definition SDI – Standard
 - Dual Link (4:2:2, 4:4:4, alpha channel, 10 bit, 12 bit) – Standard
 - Composite Analog Video – Option CPS
 - Multiple Input Mode 2 SDI Inputs – Standard
 - Multiple Input Mode 4 SDI Inputs – Option 2SDI
- Color Gamut Monitoring
 - Arrowhead Display – Standard
 - Diamond and Split Diamond Displays – Standard
 - Spearhead Display – Option PROD
 - Luma Qualified Vector (LQV™) – Option PROD
- Audio Monitoring Standards and Formats
 - Analog, Digital AES/EBU, Digital Embedded – Option AD
 - Analog and Digital including Dolby Digital, Dolby Digital Plus, and Dolby E – Option DPE
- Measurement and Analysis
 - Automated Eye Pattern and Jitter Measurements – Option PHY
 - Color Bar and Pathological Signal Generation – Option PHY
 - Digital Data Analysis – Standard
 - ANC Data Inspector – Standard
 - Simultaneous Input Monitoring – Standard
 - 3D Video Monitoring – Standard
 - Audio/Video Delay Measurement – Standard

Multiformat support grows with your needs.

Applications

- Monitoring and Compliance Checking in Content Distribution and Broadcast
- Quality Control in Content Production and Post Production
- Equipment/System Qualification and Troubleshooting for Installation and Maintenance of Content Creation and Distribution Facilities
- Research and Development of Professional Video Equipment

*1 Audio Surround Sound Display licensed from Radio Technische Werksstätten GmbH and Co. KG (RTW).

WVR8300

The measurement and monitoring capabilities of the WVR8300 provide precision capabilities such as Physical Layer Measurements, Digital Data

Both WVR8300 and WVR8200 support flexible combinations of options and field upgrades, providing an excellent solution for multiformat environments while protecting your investment. For complete details regarding option and feature availability by model please refer to the section of this document on ordering information.

WVR8RFP

The WVR8300 and the WVR8200 can be controlled by the newly designed remote front panel (WVR8RFP) which has the same control button and knob configuration as the front panel on the instrument. The new WVR8RFP allows operators to access and control the WVR8300 or the WVR8200 from a distance of up to 1000 ft. with power supplied from the base instrument through the cable. Users can also choose to connect the WVR8RFP with an external 12 V DC power source which can extend the distance of the cable run to 4000 ft.

From Composite Analog to 3G-SDI Advanced Digital Video – All in One Platform

Ideal for multiformat environments, the WVR8300 and WVR8200 advanced waveform rasterizers provide flexible options and field-installable upgrade kits to monitor diverse video types including 3G-SDI, Dual Link, HD/SD-SDI, and composite analog video.

Both WVR8300 and WVR8200 come standard with Dual Link SMPTE 372M compliant monitoring, SMPTE 352M automatic format detection, and selectable display of Alpha Channel as well as 2K Dual Link monitoring with XYZ Color Space.

These instruments allow for monitoring of Link A, Link B, or the combined Dual Link input with a comprehensive set of displays and status reporting tools. The Tektronix-patented Timing display, which measures timing between Link A and Link B of the Dual Link signal, proves a valuable ally to maintain correct timing between the two links.

To support the latest production trends for high-definition 1080p 50/59.94/60 content, the WVR8300 and WVR8200 provide optional capabilities to monitor the 3G-SDI format. Option 3G for the WVR8300 and WVR8200 enables monitoring of SMPTE 425M Level A (directly mapped) and Level B (mapped from Dual Link) signals. Level B support for 2xHD (1920x1080 or 1280x720) is ideally suited for 3D distribution of Left and Right Eye signals within a 3G-SDI multiplex.

Monitoring display modes such as Waveform, Vector, Gamut, Timing, Status, Picture, and Audio, as well as automated physical-layer measurements and in-depth data analysis are available for 3G-SDI and other input formats.

Both WVR8300 and WVR8200 support any combination of video and audio format options, so these instruments excel in multiformat environments and evolve with your needs to protect your investment.

3G-SDI monitoring, jitter measurement, and test generator.

WVR8200

The WVR8200 provides an ideal solution for advanced monitoring of analog, digital, high frame-rate digital video, and multiple audio formats. This flexible solution comes standard with HD/SD-SDI and Dual Link video monitoring and can be equipped with options and upgrades to monitor 3G-SDI and/or composite analog video. The WVR8200 is an intelligent choice that prepares you for format transitions and growing monitoring needs. Available audio options include support for analog, digital AES/EBU, digital embedded, Dolby Digital, Dolby Digital Plus, and Dolby E formats.

- Video Monitoring Standards and Formats
 - 3G-SDI (Level A and Level B) – Option 3G
 - High Definition SDI – Standard
 - Standard Definition SDI – Standard
 - Dual Link (4:2:2, 4:4:4, alpha channel, 10 bit, 12 bit) – Standard
 - Composite Analog Video – Option CPS
 - Multiple Input Mode 2 SDI Inputs – Standard
 - Multiple Input Mode 4 SDI Inputs – Option 2SDI
- Color Gamut Monitoring
 - Arrowhead Display – Standard
 - Diamond and Split Diamond Displays – Standard
 - Spearhead Display – Option PROD
 - Luma Qualified Vector (LQV™) – Option PROD
- Audio Monitoring Standards and Formats
 - Analog, Digital AES/EBU, Digital Embedded – Option AD
 - Analog and Digital including Dolby Digital, Dolby Digital Plus, and Dolby E – Option DPE
- Measurement and Analysis
 - Automated Eye Pattern and Jitter Measurements – Option PHY3
 - Eye Pattern Display and Jitter Readouts – Option EYE or PHY3
 - Color Bar and Pathological Signal Generation – Option GEN
 - Digital Data Analysis – Option DAT
 - ANC Data Inspector – Option DAT
 - Simultaneous Input Monitoring – Option SIM
 - 3D Video Monitoring – Option 3D
 - Audio/Video Delay Measurement – Option AVD

Physical-layer options provide precise measurements for video signals.

Unmatched Measurement and Monitoring Performance for Content Creation and Content Distribution

Most Advanced Physical Layer Measurement Solutions

The WVR8300 and WVR8200 high-performance waveform rasterizers offer the most comprehensive physical-layer signal measurements for engineers. When equipped with Option 3G and relevant physical-layer

options for each model, the WVR8300 and WVR8200 can perform 3G-SDI eye pattern display, jitter measurements, and cable length measurements (Option PHY for WVR8300 or Option EYE or PHY3 for WVR8200). Options PHY and EYE provide unique capabilities such as reporting jitter levels above 1 UI and providing various jitter filters from 10 Hz to 100 kHz for SD/HD/3G-SDI signals. An easy-to-interpret gauge provides direct readout for jitter measurements. Users can configure timing jitter and alignment jitter readouts to be displayed simultaneously to effectively isolate the sources of jitter. The SDI Status display summarizes key signal parameters such as signal strength, cable loss, and estimated cable length measurements.

With FlexVu™, users can simultaneously display timing jitter and alignment jitter values, cable parameter measurements, and display different eye patterns to help quickly diagnose and resolve problems related to SDI timing jitter or cable attenuation. The infinite persistence mode of the waveform rasterizer can also be used to more easily view the eye opening of the physical-layer signal.

In addition, the WVR8300 (with Option PHY) and WVR8200 (with Option PHY3) can also perform automated eye amplitude, automated rise/fall time, automated overshoot/undershoot measurements, and provide jitter waveform display to view jitter related to line and field rates. All these capabilities help broadcasters and network operators detect and diagnose signal quality problems quickly and efficiently. WVR8300 (with Option PHY) and WVR8200 (with Option GEN) also include multirate HD/SD-SDI and 3G-SDI (with Option 3G) color bar and pathological signal generation capabilities to provide engineers with a simple signal source for quick signal path verification during system and/or equipment setup and troubleshooting.

ANC Data Inspector and CaptureVu provide detailed content analysis.

Datalist display provides detailed pixel-by-pixel information.

(AFD) per SMPTE 2016, Video Index Aspect Ratio, Wide Screen Signaling (WSS), V-Chip, TSID, CGMS-A, Broadcast Flag, CEA708/608 Closed Caption, Teletext, and Time Code information.

Today there is a wide array of metadata that provides information to a variety of equipment through the processing chain. Monitoring of this metadata is critical to ensure that the processing equipment correctly handles the signal. For instance, correct format of the AFD ensures that the aspect ratio on the display is correctly formatted and the automated AFD graticule is available for the picture display of the WVR8300 and WVR8200 along with the binary data and text description for easy monitoring.

The WVR8300 and WVR8200 can also monitor Dolby metadata embedded in the Vertical Ancillary (VANC) data space per SMPTE 2020.

The Datalist display, available as standard on the WVR8300 and available as part of option DAT on the WVR8200, provides detailed information on the actual data values in HD/SD-SDI and 3G-SDI (with Option 3G) input signals. Users can easily use this display to locate protocol errors in the input signals.

The right side of the display shows the data values in hexadecimal, decimal, or binary format and uses the following color coding for easy identification of data types and errors:

- Green – Active video data
- Blue – Data in horizontal or vertical blanking intervals
- White – EAV, SAV, and other reserved words
- Yellow – Data outside nominally allowed values
- Red – Data with illegal values

The left side of display shows un-interpolated digital values plotted against sample numbers as a digital waveform. You can configure this unique display in either Video mode or Data mode.

In Video mode, the display shows the Y, Cb, Cr values aligned temporally, but offset vertically. Like the waveform display, you can configure the display to show 1, 2, or all 3 components.

Monitoring of Ancillary data (Closed Caption, Time Code, and AFD) using Aux Data Status.

Superior Data Analysis Capabilities for Engineers and Operators

The new ANC Data Inspector (standard on WVR8300 and available on WVR8200 with Option DAT) provides an industry-leading solution to help broadcasters easily and accurately ensure that all required VANC data is present and correctly configured through an intuitive ANC data display.

In contrast to other solutions, the ANC Data Inspector enables operators to easily and quickly ensure that the VANC data is present and free of errors. When errors are detected, engineers are quickly guided to a more detailed view of the data packet content for further analysis.

With FlexVu™, each picture display tile can display different CEA708/608 Closed Caption and individual Teletext subtitles. Teletext subtitle pages can be decoded in either WST or OP47 format.

The Auxiliary Data Status display (standard on both the WVR8300 and WVR8200) provides summary information on Active Format Description

Simultaneous display, virtually two instruments in one.

Simultaneous 3D display of Left Eye and Right Eye signals.

Full-featured Simultaneous Input Monitoring Boost Versatility

The Simultaneous Input Monitoring (SIM) capability standard on the WVR8300 and available with Option SIM on the WVR8200 takes multiformat monitoring to a new level. This capability helps operational staff quickly determine if a video quality problem existed in the input signal or arose in their facility. It enables engineering staff to quickly detect, diagnose,

Multiple Input mode display of 4 SDI inputs with input labels for each signal.

and resolve technical problems introduced in a piece of video equipment by comparing the input and output signals at each point in the chain. This feature is also especially helpful when checking for transparency during format conversion.

FlexVu™ enables flexible and intuitive configuration of displays from two monitored inputs. User can display simultaneous fault detection, status reporting, alarm generation, and error logging. SIM is ideal for transmission monitoring of simultaneous HD and SD programs. It is also ideal for monitoring stereoscopic 3D content in production and post production applications by simultaneously monitoring the Left Eye signal and the Right Eye signal.

SyncVu™ is used in conjunction with SIM mode for 3D applications when input A is used for the Left Eye and input B is used for the Right Eye (**Note:** SIM is included as part of Option 3D on WVR8200). When SyncVu is enabled the Left and Right tile displays are synchronized so that if a Picture Tile is selected for Tile 1, automatically Tile 2 displays a Picture Tile in exactly the same mode as Tile 1. This enables the user to quickly configure the instrument identically for Left and Right Eye 3D monitoring.

Multiple Input mode can be used to monitor up to 4 SDI inputs simultaneously when in Full Screen mode (4-input mode requires Option 2SDI). This type of display is ideal for camera balance applications to check the video level across multiple inputs. This Multiple Input mode is available within Waveform, Vector, Lightning, Diamond, Arrowhead, and Spearhead (with Option PROD) allowing for the comparison of video inputs across a wide variety of these displays.

3D Left and Right Eye images showing a Difference Map and Red/Cyan Anaglyph using SIM mode.

3D Left and Right Eye images showing Green/Magenta Anaglyph and Checkerboard display using SIM mode.

3D Measurement and Monitoring

The 3D measurements and displays are standard on the WVR8300 and available as Option 3D on the WVR8200. A 3D image is comprised of a Left Eye and Right Eye view feed as two separate HD-SDI signals or combined within a 3G Level B format. Additionally, a 3D signal can be carried within a single SDI signal as a left and right image Side by Side, Top/Bottom, or Field Interlace. Within the instrument a variety of different 3D monitoring modes are available to assist the user in determining the difference between the Left Eye and Right Eye views. From this disparity difference between the two left and right images the depth of an object within the image can be determined.

For monitoring purposes a variety of displays can be set up within the Picture mode:

- Difference Map Display – A subtraction of the two luma video signals L-R or R-L to produce a grayscale difference map image to see the difference between left and right images.
- Red/Cyan Anaglyph Display – The left image is shown in red and the right image is shown in cyan, with identical left and right objects shown in monochrome. This allows the user to isolate differences between objects and gauge the depth of the object within the image.
- Green/Magenta Anaglyph Display – The left image is shown in green and the right image is shown in magenta, with identical left and right objects shown in monochrome. If an object appears in magenta and then green this indicates that the object is coming out from the screen plane. Similarly if the object appears in green and then magenta the object is behind the screen plane.
- Checkerboard Display – This picture display shows a block of the image from the left eye and then the next block shows the image from the right eye in a 16x9 checkerboard pattern. This helps the user compare the levels and color of the signal between the left and right images.

These modes help the user compare the disparity between the left and right images and can assist in interpreting the depth of the objects within the image.

3D Left and Right Eye images showing Disparity Grid and Disparity Cursor measurement using SIM mode.

For measurement of the depth of an object within the image a Disparity Grid can be overlaid over the picture with a horizontal disparity between 1 to 15% of screen width and a vertical disparity of 50%, 25%, or 10% that can be selected by the user. The horizontal and vertical position controls allow the Disparity Grid to be moved around within the picture display to gauge the depth of objects within the image.

A set of Disparity Cursors are also available for precise measurement of horizontal disparity of an object between the Left and Right Eye images. Readout is given of the pixel difference between the cursors and the percentage of disparity of an object.

See and Solve™ displays detect and address problems quickly and efficiently.

See and Solve™ with Tektronix Displays

Tektronix See and Solve™ displays simplify video monitoring tasks such as calibration, error detection, and content correction allowing users to detect errors at a glance and troubleshoot them efficiently.

Specialized Session and Status displays provide summarized yet comprehensive reports of conditions and measurements of content parameters.

The Black and Frozen frame detection can be used to alert the operator to a problem in the transmission chain. These and other errors can automatically be logged in the Error Log and provided as a report.

The powerful Error Log is configurable and provides detailed reports for up to 10,000 events that can be downloaded using a web browser or saved through a front panel connection to a USB flash drive. Alarms can also activate ground closures and SNMP traps simplifying centralized monitoring of multiple programs.

The FlexVu™ four-tile display provides maximum flexibility to increase your productivity. Unlike instruments with predetermined view combinations or limited choices, FlexVu™ lets you create a multiview display tailored to your specific needs and work practices. Each tile can be configured to enable easy signal analysis such as multiple alarm and status screens, different Safe Area Graticules and cursors on each tile, and more.

Tektronix displays offer the sharpest CRT-like trace quality for clear waveform and vector monitoring without pixelation distortions. The familiar video waveform display can show SD/HD/3G-SDI signals in RGB, YPbPr, YRGB, or composite formats. Signal components can be displayed in either Parade or Overlay mode. For composite analog video, NTSC and PAL signals can be displayed with luma, chroma, and luma+chroma filtering. The vector display offers user-selectable graticules, color targets (75% or 100%), and color axis.

FlexVu – The display that adapts to your work practices.

The Tektronix-patented Diamond, Split Diamond, and Arrowhead gamut displays simplify the process of verifying gamut compliance.

The Diamond and Split Diamond displays help easily identify and correct RGB gamut errors in digital video signals. The Arrowhead display saves time in verifying composite gamut compliance for digital video signals.


User-selectable gamut thresholds let you tailor these displays and the associated gamut alarms to your particular compliance standards.

You can also select bright-up conditions to see the location of gamut errors on the picture display.

The WVR8300 and WVR8200 also feature new optional advanced color gamut monitoring capabilities including the Tektronix-patented Luma Qualified Vector (LQV™) display and Spearhead display which, when used in conjunction with Tektronix proprietary Diamond and Split Diamond gamut displays, provide the most comprehensive color gamut monitoring tools available for precise color gamut adjustments (Option PROD).

The picture display can simultaneously detect and decode CEA708/608 Closed Caption. Teletext subtitle pages can also be decoded in either 625 formats or using OP47 Ancillary data. Flexible Safe Area Graticules allow for quick placement of graphics, titles, or logos. Using FlexVu™, users can see two or more pictures with different graticules.

The CaptureVu® feature on the WVR8300 and WVR8200 allows users to capture, store, and download the data of a video frame to recreate displays and compare the live signal to captured data for easy troubleshooting of intermittent errors or for analyzing fault conditions at remote sites.

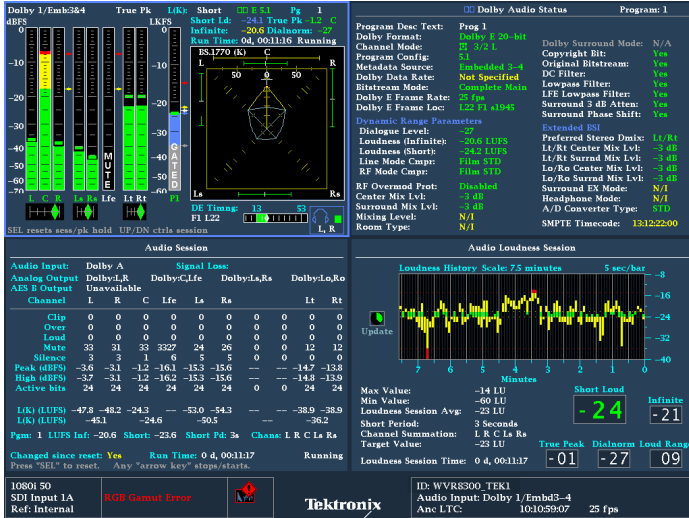

Surround Sound, Dolby Metadata, Audio Session, and Loudness Session.

Complete Monitoring Tool Set for Optimum Sound Quality

The WVR8300 and WVR8200 provide high-quality digital filtering and oversampling to insure precise, reliable, and repeatable audio measurements. For easy monitoring, the WVR audio options provide format auto-detection and flexible mapping of audio inputs to analog or digital audio outputs for connection to external devices.

The Surround Sound*1 display provides intuitive graphical representation of channel interaction in a system. The Bars display provides indicators for faults, audio levels, and Dolby format information. The flexible Lissajous display allows the selection of any two audio channels.

Loudness measurements are made to ITU-R BS.1770-2. A Loudness meter is available within the Audio display that provides Short and Infinite Loudness measurements. The Loudness session display graphically plots Loudness measurement over time from 90 seconds to 30 hours. The Loudness measurements can be downloaded through the network or saved to USB for further analysis.

Specialized audio displays provide deeper inspection of the signal and make the WVR8000 Series instruments the most comprehensive waveform and audio rasterizers available. The audio session displays summarize levels, faults, and number of active bits for each channel. These instruments also feature Audio Control Packet Data and Channel Status displays.

The Dolby Status display (in Option DPE) gives an in-depth view of integrated or VANC metadata and Dolby E Guard Band timing and synchronization.

User-configurable thresholds for the Dolby E Guard Band timing measurement (in Option DPE) are available as well as Dolby E Guard Band timing and trigger alarms based on their specific guard band parameters.

*1 Audio Surround Sound Display licensed from Radio Technische Werksütten GmbH and Co. KG (RTW).

Timing and Lightning displays simplify timing tasks.

Facility Timing Made Easy

Audio/Video synchronization is an important challenge in the processing of video materials. The WVR8300 or WVR8200 with Option AVD displays the A/V delay on a graphical bar indicator. The measurement readout gives facility engineers the necessary tools to ensure system integrity and facilitate A/V delay compliance. This feature provides out-of-service measurement of A/V delay for analog or digital audio and video formats. A TG700 is required to generate the SDI signal which contains the audio and video sequence that can be distributed through the system and measured by the WVR8300 or WVR8200 with Option AVD.

The Tektronix-patented SMPTE RP168 compliant Timing display makes facility timing easy through a simple graphical representation which shows the relative timing of the input signal and the reference signal (or a saved offset reference) on an X-Y axis. When in SIM mode the Timing display can be used to time each input relative to the reference or measure the timing between each input.

The Lightning display shows luma and chroma amplitudes and helps users verify component timing using a color bar signal. The Tektronix-patented Bowtie display (standard on both the WVR8300 and WVR8200) complements the timing measurement capability of the Lightning display. Using a special Bowtie test signal in component format, this display helps make precise and accurate measurements of interchannel amplitude and timing. The SCH Phase display helps quickly verify this critical timing parameter of composite analog video signals.

Video Input and External Reference Formats Supported

Automatic Detection of a Wide Range of Signal Formats

The WVR8300 and WVR8200 waveform rasterizers accept a wide variety of input signal formats and external references. The rasterizer will automatically detect the signal format and establish the appropriate settings for the various displays.

Setting	Opt. CPS	STD SD	STD HD	External Reference Inputs													
				Bi-level Sync		Tri-level 720p			Tri-level 1080p		Tri-level 1080i			1080 SF			
				NTSC	PAL	50 Hz	59.94 Hz	60 Hz	23.98 Hz	24 Hz	50 Hz	59.94 Hz	60 Hz	23.98 Hz	24 Hz		
NTSC 59.94 Hz	X			X													
PAL 50 Hz	X				X												
BT601 483i, 59.94 Hz (525)		X		X			X					X					
BT601 576i, 50 Hz (625)		X			X	X					X						
296M 720p, 23.98 Hz			X	X			X		X			X			X		
296M 720p, 24 Hz			X					X		X				X			X
296M 720p, 25 Hz			X		X	X					X						
296M 720p, 29.97 Hz			X	X			X					X					
296M 720p, 30 Hz			X					X						X			
296M 720p, 50.00 Hz			X		X	X					X						
296M 720p, 59.94 Hz			X	X			X					X			X		
296M 720p, 60.00 Hz			X					X		X				X			X
240M 1035i, 59.94 Hz			X	X			X					X					
240M 1035i, 60 Hz			X					X		X				X			X
274M 1080i, 50 Hz			X		X	X					X						
274M 1080i, 59.94 Hz			X	X			X					X					
274M 1080i, 60 Hz			X					X		X				X			X
274M 1080p, 23.98 Hz			X	X			X		X			X			X		
274M 1080p, 24 Hz			X					X		X				X			X
274M 1080p, 25 Hz			X		X	X					X						

External Reference Inputs

Setting	Opt. CPS	STD SD	STD HD	External Reference Inputs											
				Bi-level Sync		Tri-level 720p			Tri-level 1080p		Tri-level 1080i			1080 SF	
				NTSC	PAL	50 Hz	59.94 Hz	60 Hz	23.98 Hz	24 Hz	50 Hz	59.94 Hz	60 Hz	23.98 Hz	24 Hz
274M 1080p, 29.9 Hz			X	X			X					X			
274M 1080p, 30 Hz			X					X					X		
274M 1080sf, 23.9 Hz			X	X			X		X			X		X	
274M 1080sf, 24 Hz			X					X		X			X	X	
274M 1080sf, 25 Hz			X		X	X					X				
274M 1080sf, 29.9 Hz			X	X			X					X			
274M 1080sf, 30 Hz			X					X					X		

Supported Dual Link Formats

Format	Sample Structure	Frame/Field Rates
Dual Link		
1920 × 1080	4:2:2 YCbCr 10 bit	60, 60/1.001, and 50 progressive
	4:4:4 RGB	30, 30/1.001, 25, 24 and 24/1.001 progressive, PsF
	4:4:4 RGB +A 10 bit	
	4:4:4 RGB 12 bit	60, 60/1.001, and 50 fields interlaced
	4:4:4 YCbCr 10 bit	
	4:4:4 YCbCr +A 10 bit	
	4:4:4 YCbCr 12 bit	
4:2:2 YCbCr 12 bit		
4:2:2:4 YCbCr +A 12 bit		
2048 × 1080	4:4:4 RGB	30, 30/1.001, 25, 24, and 24/1.001 progressive, PsF
	4:4:4 RGB +A 10 bit	
	4:4:4 RGB 12 bit	
	4:4:4 YCbCr 10 bit	
	4:4:4 YCbCr +A 10 bit	
	4:4:4 YCbCr 12 bit	
	4:2:2 YCbCr 12 bit	
4:2:2:4 YCbCr +A 12 bit		
4:4:4 XYZ 12 bit		

Supported 3G Single Link Formats

Format	Sample Structure	Frame/Field Rates
3G-SDI Formats		
Single Link		
1920 × 1080	4:2:2 YCbCr 10 bit Level A and Level B	50, 59.94, 60 progressive
	4:2:2 YCbCr 10 bit	23.98, 23.98sF, 24, 24sF, 25, 25sF 29.97, 29.97sF, 30, 30sF progressive 50, 59.94, 60 interlaced
	4:4:4 YCbCrA 10 bit Level B	
	4:4:4 RGB 10 bit	
	4:4:4 RGB +A 10 bit Level B	
	4:4:4 RGB 12 bit Level B	
	4:2:2 YCbCr 12 bit	
	4:2:2:4 YCbCrA 12 bit Level B	
	4:4:4 YCbCr 12 bit Level B	
2048 × 1080	4:4:4 RGB 12 bit Level B	23.98, 23.98sF, 24, 24sF, 25, 25sF, 29.97, 29.97sF, 30, 30sF progressive
	4:4:4 XYZ 12 bit Level B	
2 × HD 1920 × 1080	4:2:2 YCbCr 10 bit Level B	23.98, 23.98sF, 24, 24sF, 25, 25sF, 29.97, 29.97sF, 30, 30sF progressive 50, 59.94, 60 interlaced
2 × HD 1280 × 720	4:2:2 YCbCr 10 bit Level B	23.98, 24, 25, 29.97, 30, 50, 59.94, 60 progressive

Characteristics

Composite Video Interface (Option CPS)

Characteristic	Description
Formats Supported	NTSC, NTSC no setup, PAL
Inputs	Two, only one active at a time
Input Type	Passive loopthrough BNC, 75 Ω compensated
Input Dynamic Range	± 6 dB (typical)
Maximum Operating Amplitude	-1.8 V to +2.2 V, DC + peak AC (typical)
Absolute Maximum Input Voltage	-6.0 V to +6.0 V, DC + peak AC
DC Input Impedance	20 k Ω , nominal
Return Loss	>40 dB to 6 MHz, power on (typical) >40 dB to 10 MHz (typical) >46 dB to 6 MHz (typical) 35 dB, power off (standard amplitude video)
Crosstalk between Channels	>60 dB to 6 MHz (typical)
Loopthrough Isolation	>70 dB to 6 MHz (typical)
DC Offset with Restore Off	<20 mV (typical)
DC Restore	50 Hz and 60 Hz
Attenuation	Fast mode >95% attenuation, Slow mode <10% attenuation, <10% peaking
Slow Mode	Typical peaking 8% at 50 Hz and 60 Hz
Lock Range	± 50 ppm remains locked

External Reference

Characteristic	Description
Input Type	Passive loopthrough BNC, 75 Ω compensated
DC Input Impedance	15 k Ω , typical
Return Loss	>40 dB to 6 MHz, >35 dB to 30 MHz (typical)

Serial Digital Waveform Vertical Characteristics

Characteristic	Description
Vertical Measurement Accuracy	At 1X, $\pm 0.5\%$; at 5X, $\pm 0.2\%$ of 700 mV full-scale mode
Gain	X1, X2, X5, and X10

Frequency Response

Characteristic	Description
HD	
Luminance Channel (Y)	50 kHz to 30 MHz $\pm 0.5\%$
Chrominance Channels (Pb, Pr)	50 kHz to 15 MHz $\pm 0.5\%$
SD	
Luminance Channel (Y)	50 kHz to 5.75 MHz $\pm 0.5\%$
Chrominance Channels	50 kHz to 2.75 MHz $\pm 0.5\%$

Analog Composite Waveform Vertical Characteristics (Option CPS)

Characteristic	Description
Vertical Measurement Accuracy	$\pm 1\%$ all gain settings
Gain	X1, X2, X5, and X10
Frequency Response	Flat to 5.75 MHz, $\pm 1\%$

Waveform Horizontal Sweep Characteristics

Characteristic	Description
Sweep Timing Accuracy	$\pm 0.5\%$, all rates, fully digital system
Sweep Linearity	0.2% of time displayed on screen, fully digital system

Vector Characteristics

Characteristic	Description
Vector Amplitude Accuracy	$\pm 2\%$
Vector Phase Accuracy	$\pm 2^\circ$

Audio Characteristics (Optional Capability)

Characteristic	Description
Level Meter Resolution	0.056 dB steps at 30 dB scale, from full scale to -20 dBFS
User-selectable Scales	
Analog	dBu, Din, Nordic, VU, IEEE PPM, BBC Scale, and user definable
Digital	dBFS, Din, Nordic, VU, IEEE PPM, BBC Scale, and user definable
Meter Ballistics	Selectable from true peak, PPM type 1, PPM Type 2, and Extended VU
Defined/Programmable Level Detection	Mute, clip, user-programmable silence, over

Digital Audio (Option DPE and AD)

Characteristic	Description
Inputs	Two sets with 8 channels each, 32-192 kHz, 24 bit. Meets requirements of AES 3-ID and SMPTE 276M-1995
Input Characteristics	BNC, 75 Ω terminated, unbalanced, 0.2 V _{p-p} to 2 V _{p-p}
Input Return Loss	>25 dB relative to 75 Ω from 0.1 to 6 MHz (typical)
Outputs	Up to 8 channels, AES 3-ID output, 48 kHz 20 bit for SD embedded, 48 kHz 24 bit for HD embedded, 48 kHz 24 bit for analog to AES. For AES to AES loopthrough, output format equals input format. Meets requirements of SMPTE 276M-1995 (AES 3-ID). For decoded Dolby Digital, output is 24 bits at a rate of 32, 44.1, or 48 kHz for any one decoded pair. For decoded Dolby E, the output is 24 bits at 48 kHz or 47.952 kHz for up to four pairs
Output Characteristics	BNC, 75 Ω terminated, unbalanced, 0.9 V _{p-p} to 1.1 V _{p-p} into 75 Ω
Output Return Loss	>25 dB relative to 75 Ω from 0.1 to 6 MHz (typical)
Output Jitter	3.5 ns, peak, typical, with 700 Hz high-pass filter per AES specification (typical)
Level Meter Accuracy over Frequency	+0.1 dB from 20 Hz to 20 kHz, 0 to -40 dBFS, sine wave, Peak Ballistic mode (except for within 5 Hz of some submultiples of the sampling frequency)

Analog Audio (Option DPE and AD)

Characteristic	Description
Analog Inputs	Two sets of 6 channels each
Analog Input Characteristics	Balanced, unterminated through the rear-panel connector
Crosstalk	<90 dB
Input Impedance	24 k, typical
Analog Outputs	8 channels
Analog Output Characteristics	
Balanced	Unterminated through the rear-panel connector
Maximum Output Level	
Balanced	+24 dBu ±0.5 dB
Digital Input to Analog Output Gain Accuracy over Frequency	±0.5 dB, 20 Hz to 20 kHz, -40 dBFS, 20 or 24 bit inputs
Analog Input to Analog Output Gain Accuracy over Frequency	+0.8 dB, 20 Hz to 20 kHz, 24 dBu to -16 dBu
Output Impedance	50 Ω nominal

Power

Characteristic	Description
Power Consumption	100 W maximum
Voltage Range	100 to 240 V _{AC} ±10%; 50/60 Hz

Physical Characteristics

WVR8300/8200

Dimension	mm	in.
Height	44	1.725
Width	483	19
Depth, overall	498	19.625
Weight	kg	lb.
Net	4.3	9.5
Shipping	8.5	18.5

WVR8RFP

Dimension	mm	in.
Height	44	1.725
Width	483	19
Depth	114	4.5
Weight	kg	lb.
Net	0.79	1.75
with 25 ft. cable, power supply, and power cord	1.9	4.1

Capabilities by Model

Capability	WVR8300	WVR8200
Video Formats and Inputs		
HD-SDI / Dual Link / SD-SDI	Standard	Standard
3G-SDI (Level A and Level B)	Option 3G	Option 3G
4 SDI Input Monitoring	Option 2SDI	Option 2SDI
Composite PAL/NTSC	Option CPS	Option CPS
Audio Formats and Inputs		
Embedded and AES Digital Audio	Option AD or DPE	Option AD or DPE
Analog Audio	Option AD or DPE	Option AD or DPE
Dolby E / Dolby Digital Plus / Dolby Digital	Option DPE	Option DPE
Physical Layer Measurement		
Jitter Measurements	Option PHY	Option EYE or PHY3
Eye Pattern Display	Option PHY	Option EYE or PHY3
Eye Pattern Auto Measurements	Option PHY	Option PHY3
Pathological Signal Generation	Option PHY	Option GEN
Other Advanced Capabilities		
Advanced Color Gamut (Spearhead/LQV)	Option PROD	Option PROD
Simultaneous Input Monitoring (SIM)	Standard	Option SIM or 3D
3D Video Monitoring	Standard	Option 3D
ANC Data Inspector	Standard	Option DAT
Digital Data Analysis	Standard	Option DAT
Out-of-Service AV Delay Measurement	Standard	Option AVD

Ordering Information

Note: Please specify power plug when ordering.

Product Nomenclature and Descriptions

Model	Option	Description
WVR8300		Advanced 3G/HD/SD Waveform Rasterizer, 2 SDI inputs (3G-SDI, HD-SDI, and SD-SDI support on the same inputs – auto detect) Base unit includes HD-SDI, SD-SDI, Dual Link signal formats, Simultaneous Input Monitoring (SIM), advanced data analysis, 3D Video Monitoring, and audio/video delay measurement (requires an audio option) Option 3G required for 3G-SDI support
	3G	Add support for 3G-SDI signal formats
	2SDI* ²	Adds additional SDI module (in Slot 2) to support up to 4 SDI inputs within Multi-mode displays (3G-SDI, HD-SDI, and SD-SDI support on the same input – auto detect) Option 3G required for 3G-SDI support
	CPS* ²	Add support for composite analog video monitoring; 2 composite analog inputs; passive loopthrough
	AD	Add analog audio monitoring (2 sets of 6-channel analog audio inputs and 8-channel analog audio outputs) plus 16 channels embedded or AES/EBU digital audio support (8 channels at a time)
	DPE	Add Option AD capabilities (analog and digital audio – embedded or external AES) plus support for decoding and monitoring Dolby E, Dolby Digital, and Dolby Digital Plus
	PHY	Physical Layer Measurement Package (includes 3G-SDI, HD-SDI, and SD-SDI eye pattern and jitter waveform displays; automated measurements of eye pattern parameters, jitter, and cable parameters; color bar and pathological signal generation) Option 3G required for 3G-SDI support
	PROD	Advanced Gamut Monitoring Package (Spearhead Gamut display and Luma Qualified Vector display)
	62	Analog Audio Breakout Cable, 6 feet, male 62-pin connectors to 8 XLR male output connectors and 12 XLR female input connectors
	WVR8200	
3G		Add support for 3G-SDI signal formats
2SDI* ²		Adds additional SDI module (in Slot 2) to support up to 4 SDI inputs within Multi-mode displays (3G-SDI, HD-SDI, and SD-SDI support on the same input – auto detect) Option 3G required for 3G-SDI support
CPS* ²		Add support for composite analog video monitoring; 2 composite analog inputs; passive loopthrough
AD		Add analog audio monitoring (2 sets of 6-channel analog audio inputs and 8-channel analog audio outputs) plus 16 channels embedded or AES/EBU digital audio support (8 channels at a time)
DPE		Add Option AD capabilities (analog and digital audio – embedded or external AES) plus support for decoding and monitoring Dolby E, Dolby Digital, and Dolby Digital Plus
EYE		Eye pattern display and Jitter Measurement Package (includes 3G-SDI, HD-SDI, and SD-SDI eye pattern display; automated measurements of jitter and cable parameters) Option 3G required for 3G-SDI support
PHY3		Physical Layer Measurement Package (includes automated measurement of 3G/HD/SD eye pattern parameters, jitter, and cable parameters; jitter waveform display) Option 3G required for 3G-SDI physical layer measurements
PROD		Advanced Gamut Monitoring Package (Spearhead Gamut display and Luma Qualified Vector display)
3D		3D Video Monitoring (Left Eye/Right Eye Side by Side Simultaneous Monitoring with SyncVu™)
DAT		Add Advanced 3G/Dual-Link/HD/SD-SDI Data Analyzer and Ancillary Data Analyzer (DataList and ANC Data Inspector) Option 3G required for 3G-SDI support
SIM		Add simultaneous monitoring of two 3G/HD/SD-SDI inputs or one 3G/HD/SD-SDI input and one CPS input Option 3G required for 3G-SDI format support
AVD		Add support for out-of-service A/V delay measurement An audio option must also be ordered
GEN		Add 3G/HD/SD-SDI color bar and pathological signal generation capability Option 3G required for 3G-SDI signal generation capability
62		Analog Audio Breakout Cable, 6 feet, male 62-pin connectors to 8 XLR male output connectors and 12 XLR female input connectors
WVR8RFP		Remote Front Panel for WVR8xxx Series Waveform Rasterizer (includes 25 foot cable)
	01	100 foot cable for WVR8RFP Rasterizer Remote Front Panel

*² Option 2SDI and Option CPS cannot be installed in the same instrument.

Post Sale Upgrade Options

Model	Option	Description
WVR830UP		Post sale upgrade for WVR8300 Advanced 3G-SDI / Dual Link / HD-SDI / SD-SDI Waveform Rasterizer Option 3G required to be installed in the WVR8300 for 3G-SDI support
	3G	Add support for 3G-SDI signal formats (software option key)
	2SDI*2	Adds additional SDI module (in Slot 2) to support up to 4 SDI inputs within Multi-mode displays (3G-SDI, HD-SDI, and SD-SDI support on the same input – auto detect) Option 3G required for 3G-SDI support
	CPS*2	Add support for composite analog video monitoring; 2 composite analog inputs; passive loopthrough
	AD	Add analog audio monitoring (2 sets of 6-channel analog audio inputs and 8-channel analog audio outputs) plus 16 channels embedded or AES/EBU digital audio support (8 channels at a time)
	DPE	Add Option AD capabilities (analog and digital audio – embedded or external AES) plus support for decoding and monitoring Dolby E and Dolby Digital Plus
	PHY	Add Physical Layer Measurement Package (includes 3G-SDI, HD-SDI, and SD-SDI eye pattern and jitter waveform displays; automated measurements of eye pattern parameters, jitter, and cable parameters; color bar and pathological signal generation) Option 3G required to be installed in the WVR8300 for 3G-SDI support
	PROD	Add Advanced Gamut Monitoring Package (Spearhead Gamut display and Luma Qualified Vector display)
	IF	Upgrade installation service
	IFC	Upgrade installation service and calibration
	62	Analog Audio Breakout Cable, 6 feet, male 62-pin connectors to 8 XLR male output connectors and 12 XLR female input connectors
WVR820UP		Post sale upgrade for WVR8200 3G-SDI / Dual Link / HD-SDI / SD-SDI Waveform Rasterizer Option 3G required to be installed in the WVR8200 for 3G-SDI support
	3G	Add support for 3G-SDI signal formats (software option key)
	2SDI*2	Adds additional SDI module (in Slot 2) to support up to 4 SDI inputs within Multi-mode displays (3G-SDI, HD-SDI, and SD-SDI support on the same input – auto detect) Option 3G required for 3G-SDI support
	CPS*2	Add support for composite analog video monitoring; 2 composite analog inputs; passive loopthrough
	AD	Add analog audio monitoring (2 sets of 6-channel analog audio inputs and 8-channel analog audio outputs) plus 16 channels embedded or AES/EBU digital audio support (8 channels at a time)
	DPE	Add Option AD capabilities (analog and digital audio – embedded or external AES) plus support for decoding and monitoring Dolby E and Dolby Digital Plus
	EYE	Add eye pattern display and Jitter Measurement Package (includes 3G-SDI, HD-SDI, and SD-SDI eye pattern display; automated measurements of jitter and cable parameters) Option 3G required to be installed in the WVR8200 for 3G-SDI support
	PHY3	Physical Layer Measurement Package (includes automated measurement of 3G/HD/SD eye pattern parameters, jitter, and cable parameters; jitter waveform display) Option 3G required for 3G-SDI physical layer measurements
	PROD	Add Advanced Gamut Monitoring Package (Spearhead Gamut display and Luma Qualified Vector display)
	3D	3D Video Monitoring (Left Eye/Right Eye Side by Side Simultaneous Monitoring with SyncVu™)
	DAT	Add Advanced 3G/Dual-Link/HD/SD-SDI Data Analyzer and Ancillary Data Analyzer (Datalist and ANC Data Inspector) Option 3G required for 3G-SDI support
	SIM	Add simultaneous monitoring of two 3G/HD/SD-SDI inputs or one 3G/HD/SD-SDI input and one CPS input Option 3G required for 3G-SDI format support
	AVD	Add support for out-of-service A/V delay measurement An audio option must also be ordered
	GEN	Add 3G/HD/SD-SDI color bar and pathological signal generation capability Option 3G required for 3G-SDI format support
	IF	Upgrade installation service
	IFC	Upgrade installation service and calibration
62	Analog Audio Breakout Cable, 6 feet, male 62-pin connectors to 8 XLR male output connectors and 12 XLR female input connectors	

*2 Option 2SDI and Option CPS cannot be installed in the same instrument.

WVR8000 Series Rear Panel.

International Power Plugs

Option	Description
Opt. A0	North America power
Opt. A1	Universal Euro power
Opt. A2	United Kingdom power
Opt. A3	Australia power
Opt. A5	Switzerland power
Opt. A6	Japan power
Opt. A10	China power
Opt. A11	India power
Opt. A12	Brazil power
Opt. A99	No power cord or AC adapter

Service Offerings

Service	Description
WVR8300, WVR8200, WVR8RFP	
Opt. CA1	Provides single calibration event or coverage for the designated calibration interval whichever comes first
Opt. C3	Calibration Service 3 Years
Opt. C5	Calibration Service 5 Years
Opt. D1*3	Calibration Data Report
Opt. D3*3	Calibration Data Report 3 Years (with Opt. C3)
Opt. D5*3	Calibration Data Report 5 Years (with Opt. C5)
Opt. G3	Complete Care 3 Years (includes loaner, scheduled calibration and more)
Opt. G5	Complete Care 5 Years (includes loaner, scheduled calibration and more)
Opt. R3	Repair Service 3 Years (including warranty)
Opt. R5	Repair Service 5 Years (including warranty)
Opt. R5DW	Repair Service Coverage 5 Years (includes product warranty period). 5-year period starts at time of customer instrument purchase. This option is available if the instrument is within product warranty. It is not available once instrument exits warranty period
Opt. R3DW	Repair Service Coverage 3 Years (includes product warranty period). 3-year period starts at time of customer instrument purchase. This option is available if the instrument is within product warranty. It is not available once instrument exits warranty period

*3 Not available for WVR8RFP.



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.

Contact Tektronix:

ASEAN / Australasia (65) 6356 3900
Austria 00800 2255 4835*
Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Belgium 00800 2255 4835*
Brazil +55 (11) 3759 7627
Canada 1 800 833 9200
Central East Europe and the Baltics +41 52 675 3777
Central Europe & Greece +41 52 675 3777
Denmark +45 80 88 1401
Finland +41 52 675 3777
France 00800 2255 4835*
Germany 00800 2255 4835*
Hong Kong 400 820 5835
India 000 800 650 1835
Italy 00800 2255 4835*
Japan 81 (3) 6714 3010
Luxembourg +41 52 675 3777
Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
Middle East, Asia, and North Africa +41 52 675 3777
The Netherlands 00800 2255 4835*
Norway 800 16098
People's Republic of China 400 820 5835
Poland +41 52 675 3777
Portugal 80 08 12370
Republic of Korea 001 800 8255 2835
Russia & CIS +7 (495) 7484900
South Africa +41 52 675 3777
Spain 00800 2255 4835*
Sweden 00800 2255 4835*
Switzerland 00800 2255 4835*
Taiwan 886 (2) 2722 9622
United Kingdom & Ireland 00800 2255 4835*
USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

Updated 10 February 2011

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tektronix.com



Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

13 Apr 2012

2PW-25241-6

