



INNOVATIVE DISPLAY TECHNOLOGIES

17171 MURPHY AVENUE
IRVINE, CALIFORNIA 92614-5915
P: 949-417-8070/F: 949-417-8075

E-mail: info@shellyinc.com
Website: www.shellyinc.com

Specification

Part Number : **SCA05010-BFN-LNN**

Customer : **Version (A001)**

APPROVED BY: (FOR CUSTOMER USE ONLY)	PCB VERSION:	DATE:
--	---------------------	--------------

SOLD BY	APPROVED BY	CHECKED BY	ISSUE DATE

CONTENTS

NO.	ITEM	PAGE
1.	Cover	1
2.	Record of Revision	2
3.	LCD Module Physical Data	3
4.	External Dimensions	4
5.	Block Diagram	5~6
6.	Absolute Maximum Ratings	6
7.	Electrical Characteristics	7
8.	Interface PIN Connections	8~11
9.	Electro-Optical Characteristics	12~17
10.	Inspection Criterion	18~21
11.	Precautions For Using LCD Modules	22~24

RECORD OF REVISION

DATE	PAGE	SUMMARY

◆ LCD MODULE PHYSICAL DATA


● General Description

Display Type	16M TFT
Display Mode	POSITIVE
Viewing Direction	6 o'clock
Connection Type	COG
Operation temperature	-20°C~70°C
Storage temperature	-30°C~80°C
Driving IC	HX8258-A×2+HX8662-C

● Mechanical Description

Item	Standard Value	Unit
Number of dots	800RGB×480dots	-
LCM dimension	118.50(W)×77.55(H)×3.40(T)	mm
Active area	108.00(W)×64.80(H)	mm
Dot size	0.125(W)×0.125 (H)	mm
Dot pitch	0.135(W)×0.135(H)	mm
Backlight	14 chip white LEDS	/

◆ EXTERNAL DIMENSIONS

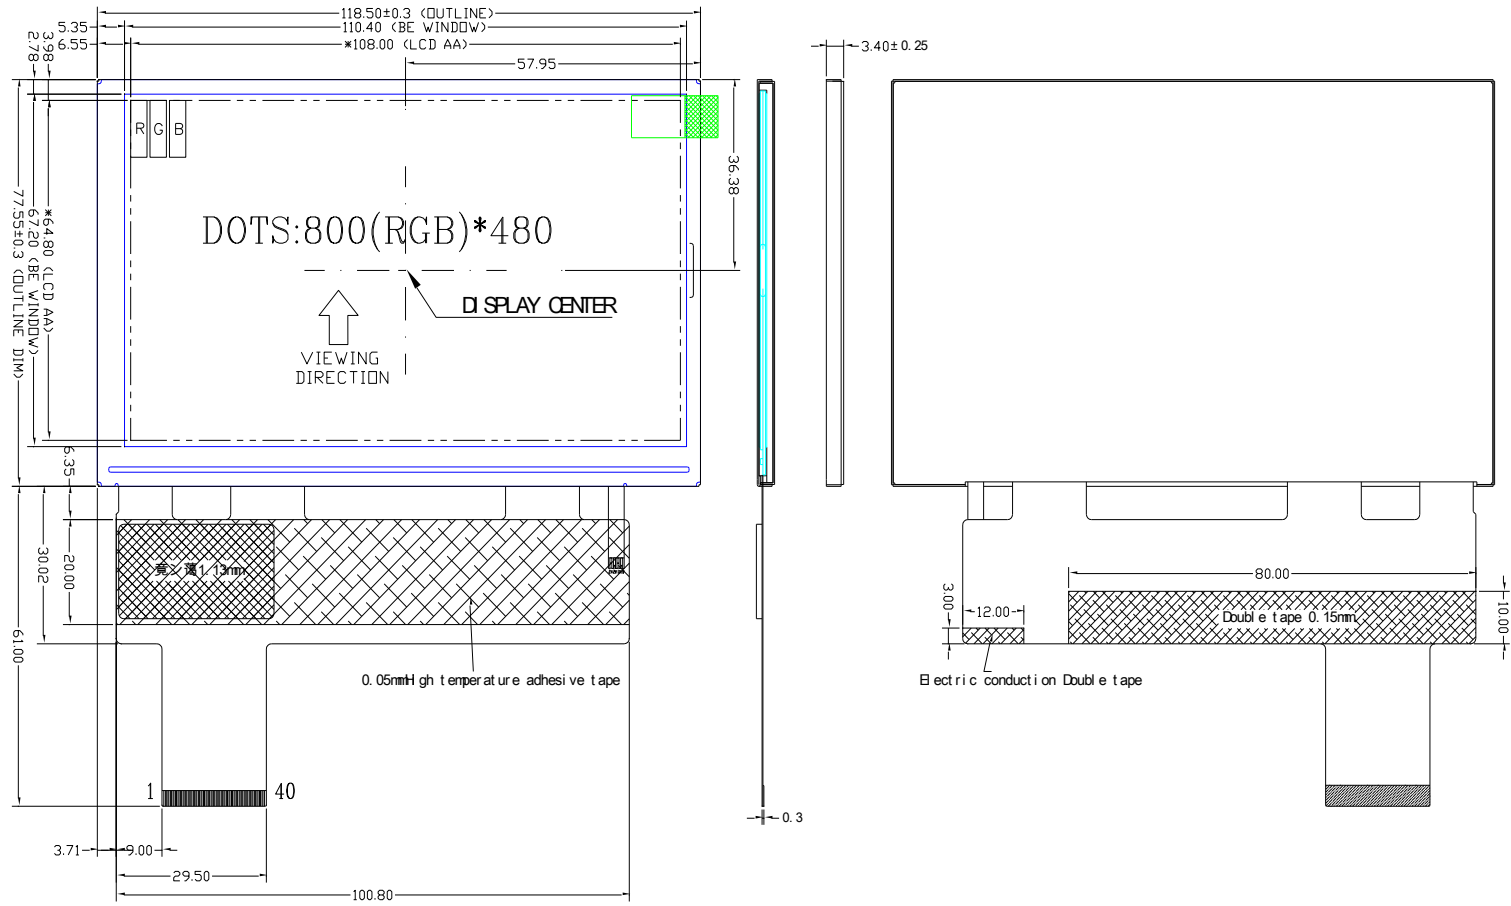



CON	DESCRIPTION
01	VLED-
02	VLED+
03	DGND
04	VDD
05	R0
06	R1
07	R2
08	R3
09	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	DGND
30	DCLK
31	NC
32	Hsync
33	Vsync
34	DE
35	NC
36	DGND
37	XR
38	YD
39	XL
40	YU

NOTE

1. DISPLAY TYPE: TFT 16M TRANSMISSIVE
2. DRIVE IC: HX8662-A*2&HX8258C
- 3.
4. LCM CONNECTOR: FH 19S-40S-0.5SH
5. BACKLIGHT: 14 Chip White LED
6. GENERAL TOLERANCE: ± 0.3
7. "*" KEY DIMENSION
8. ALL MATERIALS MUST BE BHS-001 COMPLIANT

◆ **BLOCK DIAGRAM**

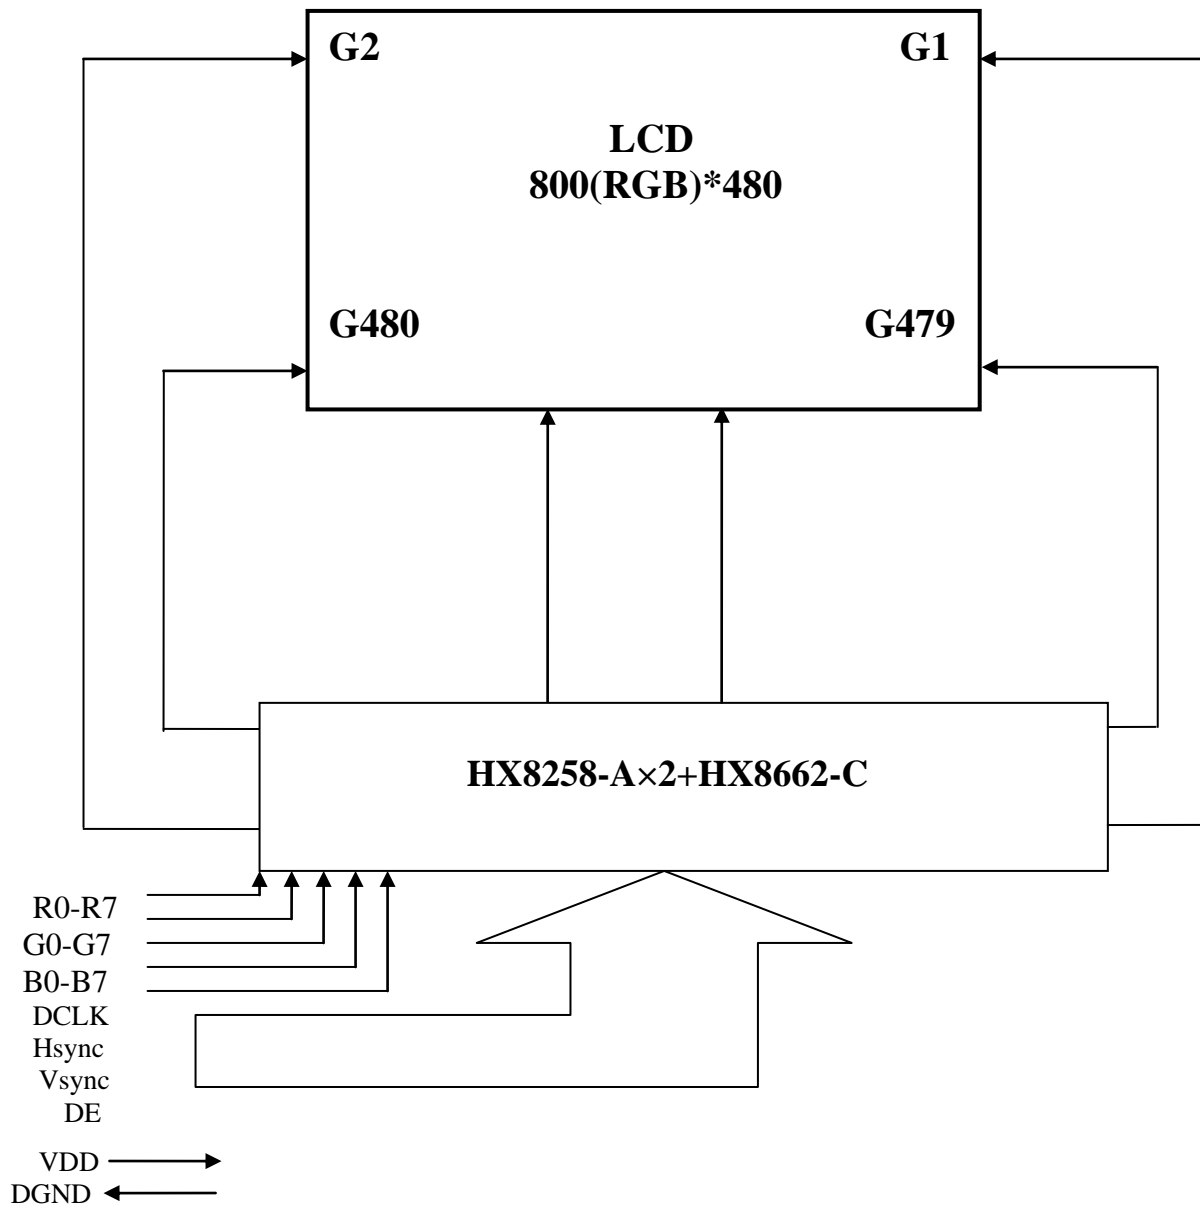

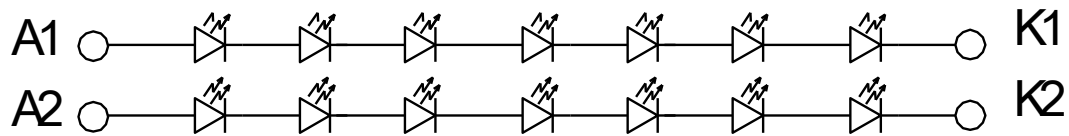

◆ ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Rating	Unit
Operating temperature	T_{op}	-20 to 70	°C
Storage temperature	T_{st}	-30 to 80	°C
Power Supply Voltage	VDD	-0.3 to 8.0	V
Power Supply Voltage	VDC	-0.3 to 8.0	V
Power Supply Voltage	VGH-VGL	-0.3 to 45.0	V
Input Voltage	V_{in}	-0.5 to VDDA+0.5	V

NOTE:

1. If the module is used above these absolute maximum ratings. It may become permanently damaged. Using the module within the following electrical characteristic conditions are also exceeded, the module will malfunction and cause poor reliability.
2. $VDD > GND$ must be maintained.

◆ ELECTRICAL CHARACTERISTICS

● DC Characteristics


Item	Symbol	Condition	Min	Typ	Max	Unit
Input high voltage	V _{IH}	-	0.8V _{DD}	-	V _{DD}	V
Input low voltage	V _{IL}	-	V _{SS}	-	0.2V _{DD}	V
Output high voltage	V _{OH}	I _{OH} =200μA	V _{DD} -0.3	-	V _{DD}	
Output low voltage	V _{OL}	I _{OL} =200μA	V _{SS}	-	V _{SS} +0.3	
Supply voltage(1)	V _{DC} -V _{SS}	T _a =25°C	4.75	5	5.5	
Supply voltage(2)	V _{DD} -V _{SS}	T _a =25°C	2.7	3.3	3.6	V
Supply voltage(3)	V _{DDA} -V _{SS}	T _a =25°C	6.5	11.46	13.5	V
Current consumption for LCD normal operation	I _{DD}	No load V _{DD} =3.3V V _{DC} =5.0V V _{DDA} =11.46	-	-	TBD	μA

● Backlight unit

Item	Symbol	Min	Typ	Max	Unit	Remark
Current	I _{BL}	-	20	-	mA	1 LED
CIE	X	0.27	-	0.32	-	X>Y
	Y	0.24	-	0.31	-	
Brightness	-	-	6000	-	cd/m ²	-
Luminous Uniformity Ratio	-	75	-	-	%	-
Bezel(BE) must be connected to ground of the main board						

Note:

1. Average Luminous Intensity of P1 ~ P5 (Using a luminance meter BM-7)
 2. Luminous Intensity Ratio = min/max * 100%
- Measured Method (X*Y: Light Area).

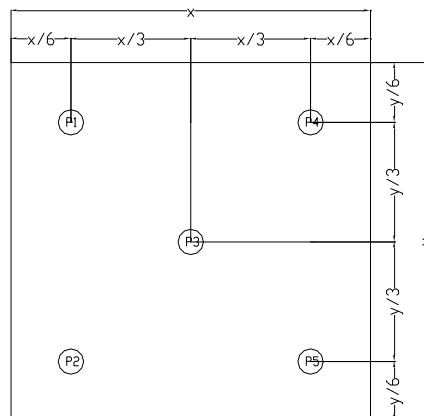

● AC Characteristics

Refer to the SPEC of HX8258-A×2+HX8662-C

◆ INTERFACE PIN CONNECTIONS

NO.	Symbol	Function
1	VLED-	Backlight negative
2	VLED+	Backlight positive
3	DGND	Ground
4	VDD	Power supply
5	R0	8-bit Red Data
6	R1	
7	R2	
8	R3	
9	R4	
10	R5	
11	R6	
12	R7	
13	G0	8-bit Green Data
14	G1	
15	G2	
16	G3	
17	G4	
18	G5	
19	G6	
20	G7	
21	B0	8-bit Blue Data
22	B1	
23	B2	
24	B3	
25	B4	
26	B5	
27	B6	
28	B7	
29	DGND	Ground
30	DCLK	<p>Clock signal. DCLK=H, User can input different polarity CLK by EDGSL setting. DCLK=L, User can select CLK rising or dual edge to latch data by EDGSL setting.</p>

31	STANDBY	Standby mode
32	HSYNC	Horizontal sync input in digital parallel RGB.
33	VSYNC	Vertical sync input in digital parallel RGB.
34	DE	Input data enable control. When DE mode, active High to enable data input.
35	NC	No connection
36	DGND	Ground
37	XR	TP pin
38	YD	
39	XL	
40	YU	

TIMING

Timing Requirement1

(TA =25°C, AVDD=2.75V to 3.6V, DVSS= 0V, tr=tf=2ns)

PARAMETER	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
HS setup time	T_{hst}	6	-	-	ns
HS hold time	T_{hhd}	6	-	-	ns
VS setup time	T_{vst}	6	-	-	ns
VS hold time	T_{vhd}	6	-	-	ns
Data setup time	T_{dsu}	6	-	-	ns
Data hold time	T_{dhd}	6	-	-	ns
DEN setup time	T_{esu}	6	-	-	ns
VS falling to HS falling time (HS_POL=HS_POL=L)	T_{HV}	-4	0	+4	T_{CPH}
Source output settling time	T_{ST}	-	-	15	μs
Source output loading R	R_{SL}	-	2	-	K ohm
Source output loading C	C_{SL}	-	60	-	pF
POL output delay time	T_{DP}	-	-	40	ns

Timing Requirement2

Sync mode :

(TA =25°C, AVDD=2.75V to 3.6V, DVSS= 0V)

PARAMETER	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
CLK frequency	F _{CPH}	-	33.26	-	MHz
CLK period	T _{CPH}	-	30.06	-	ns
CLK pulse duty	T _{CWH}	40	50	60	%
HS period	T _H	-	1056	-	T _{CPH}
HS pulse width	T _{WH}	1	128	-	T _{CPH}
HS-first horizontal data time	T _{HS}	STHD[7:0]+88 ⁽¹⁾			T _{CPH}
HS Active Time	T _{HA}	-	800	-	T _{CPH}
VS period	T _V	-	525	-	T _H
VS pulse width	T _{WV}	1	2	-	T _H
VS-DEN time	T _{VS}	STVD[6:0]+8			T _H
VS Active Time	T _{VA}	-	480	-	T _H

Note :


$$T_{HS}+T_{HA}<T_H$$

DE mode

PARAMETER	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
CLK frequency	F _{CPH}	-	33.26	-	MHz
CLK period	T _{CPH}	-	30.06	-	ns
CLK pulse duty	T _{CWH}	40	50	60	%
DE period	T _{DEH} +T _{DEL}	1000	1056	1200	T _{CPH}
DE pulse width	T _{DH}	-	800	-	T _{CPH}
DE frame blanking	T _{HS}	10	45	110	T _{DEH} +T _{DEL}
DE frame width	T _{EP}	-	480	-	T _{DEH} +T _{DEL}

PARAMETER	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
OEV pulse width	T _{OEV}	-	150	-	T _{CPH}
CKV pulse width	T _{CKV}	-	133	-	T _{CPH}
DE(internal)-STV time	T ₁	-	4	-	T _{CPH}
DE(internal)-CKV time	T ₂	-	40	-	T _{CPH}
DE(internal)-OEV time	T ₃	-	23	-	T _{CPH}
DE(internal)-POL time	T ₄	-	157	-	T _{CPH}
STV pulse width	-	-	1	-	T _H

WAVEFORM

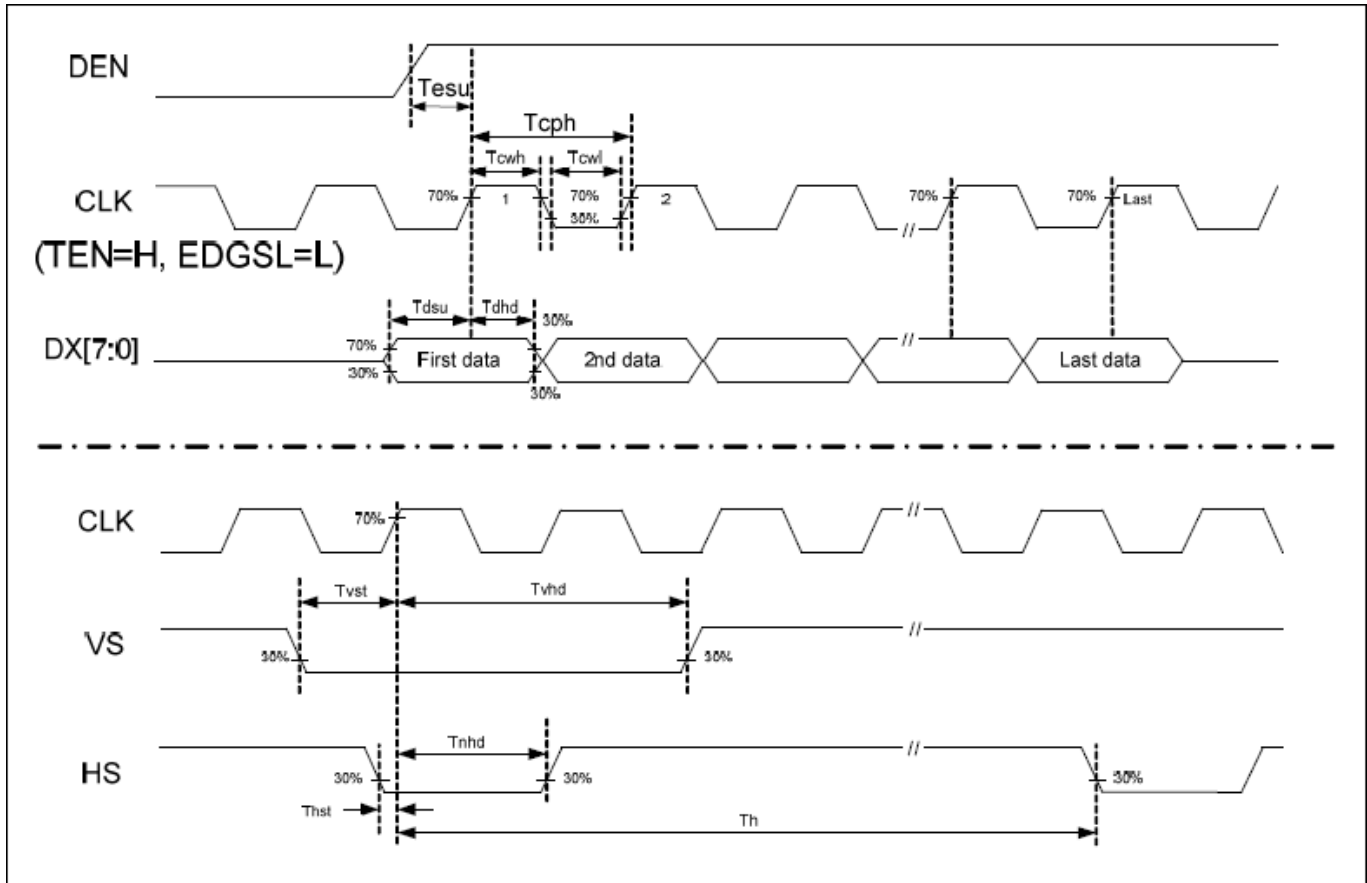

◆ ELECTRO-OPTICAL CHARACTERISTICS

Driving condition: VDD=3.3V, I_{BL}=20mA/LED, Temperature =23°C±5°C , Humidity=60%±20%RH

Item	Light angle (°)	Temp (°C)	Symbol	Specifications			Unit	Conditions	Note		
				Min.	Typ.	Max.					
Transmittance	0	25	-	-	5.5	-	%	(Equipment :BM-7/CS-200)	(1)		
Contrast ratio	0	25	Cr	550	-	-	-		(2)		
Brightness	0	25	-	300	320	-	cd/m ²		-		
Luminance uniformity (surface within panel)	0	25	Lu	70	80	-	%		(3)		
Cross talk	0	25	CTV	-	-	20	%		(4)		
Chromaticity	R x	0	25	Rx	0.5735	0.6235	0.6735	-	-		
	R y			Ry	0.2964	0.3464	0.3964				
	G x			Gx	0.2914	0.3416	0.3914				
	G y			Gy	0.5099	0.5599	0.6099				
	B x			Bx	0.0953	0.1453	0.1953				
	B y			By	0.0599	0.1099	0.1599				
	W x			Wx	0.2696	0.3196	0.3696				
	W y			Wy	0.2857	0.3357	0.3857				
Color Reproduction Area(NTSC)		0	25	-	-	53	-	%	CIE1931(x,y)	(5)	
Response time	Tr	0	25	-	-	15	30	ms	Viewing normal angle $\theta_x = \theta_y = 0^\circ$	-	
	Tf				-	35	50				
Viewing angle	Hor.	0	25	-	-	60	-	deg	Center CR≥10	-	
						θ_{x-}	60				-
	Ver.					θ_{y+}	65				-
						θ_{y-}	45				-

Note:

(1). Transmittance

Introduction

Transmittance (diffuse transmission factor) is a measure for the LCD panel transparency. The Light Source for this measurement is the accompanying LCD-module backlight system (LEDs, Lightguide...)

Measurement conditions:

Measuring Equipment	BM-7/CS-200
Measurement Point Diameter	3mm
Measurement Point Location	Active Area Center Point
Light source	LCD module backlight
Reflectance Plate	Reflectance Standard(cal. plate)
Test pattern	All pixels white
Contrast setting	Maximum

Measuring procedure:

Transmittance:

The light source is located at the backside of the panel.

- 1、 Measure the light source
- 2、 Place the LCD panel in front of the light source. Measure the luminance on the LCD panel surface

Definitions

$$\tau = \frac{L_{V_{\text{LCD-panel}}}}{L_{V_{\text{lightsource}}}} * 100\%$$

(2) **Definition of Contrast Ratio (C/R):** Ratio of gray max (Gmax) & gray min (Gmin) at the center point.

$$CR = \frac{G(\text{Max})}{G(\text{Min})}$$

Where

Gmax: Luminance with all pixels white

Gmin: Luminance with all pixels black

(3). **Surface luminance uniformity within panel**

Measurement conditions:

Measuring Equipment	CS200 // BM-7
Measurement Point Diameter	3mm // 1mm
Measurement Point Location	Active Area
Light Source	Transmissive Mode: Internal (Backlight)
Test pattern	White

Measuring procedure:

Measure the luminance L_i with the points in figure 1.

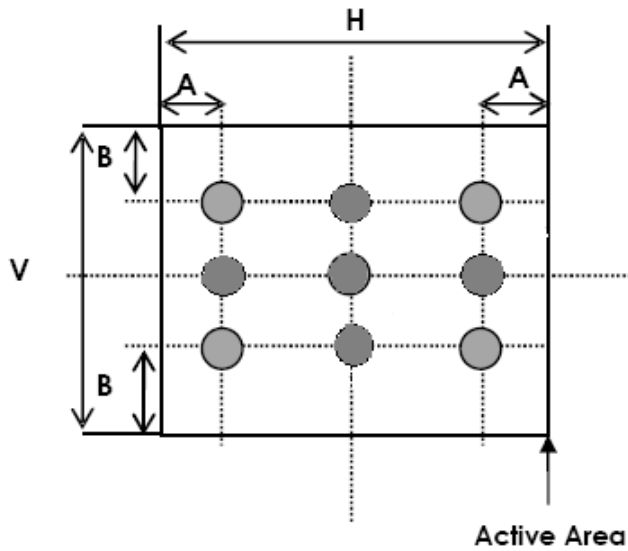


Figure 1

A: 5 mm B: 5 mm
H, V: Active Area

Uniformity value (L_u):

$$L_u = \frac{\min(L_i)}{\max(L_i)} * 100\%$$

(4) . CROSS-TALK

Introduction :


Crosstalk is an effect where the contrast of a display pixel is influenced by the state of the related pixels. A measure for this effect is the Cross Talk Value (CTV)

Measurement conditions:

Measuring Equipment	CS200 // BM-7
Measurement Point Diameter	3mm // 1mm
Measurement Point Location	
Light Source	Transmissive Mode: Internal (Backlight)
Contrast setting	Maximum

• Test Pattern (valid for all grey scales):

W: The width of the rectangle in the following pictures;

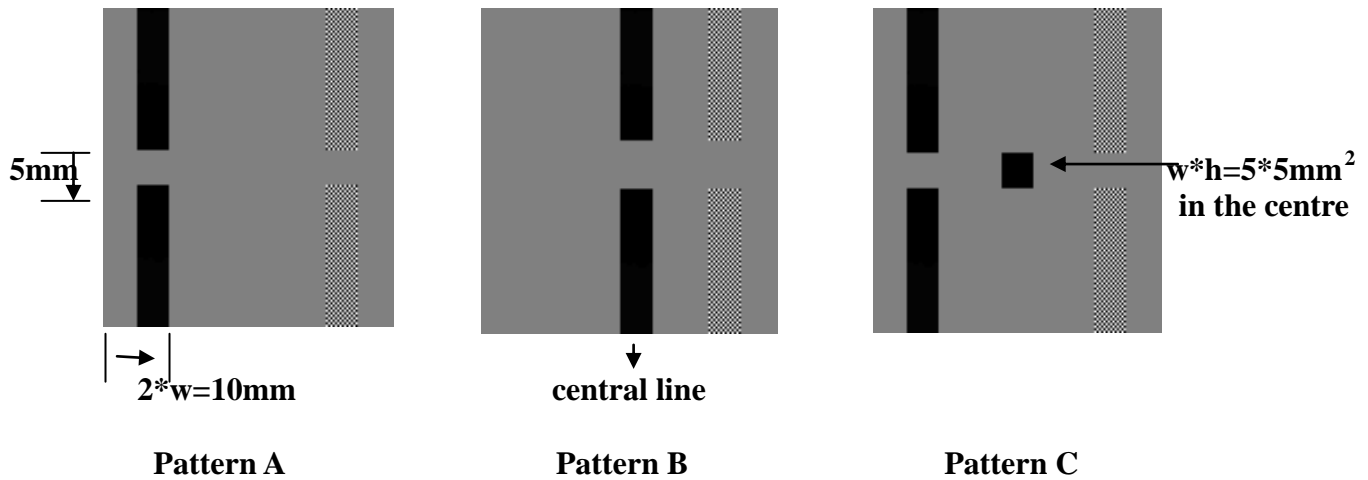

• Definitions :

Cross Talk Value :

$$CTV = |L_{vA} - L_{vB}| / L_{vA} * 100\%$$

Where :

L_{vA}: Luminance measured with the centre test point of pattern A

L_{vB}: Luminance measured with the centre test point of pattern B.

• Measuring procedure :

Adaptation of the display to the highest contrast ratio (CR = L_{vA}/L_{vC}) as defined by the test patterns and a test area of 14 x 14 dots.

Measurement of Luminance with test point A, B.

Determination of Crosstalk value (CTV)

(5). NTSC

Measurement conditions:

Measuring Equipment	LCD-5200
Measuring Point Diameter	3mm//1mm
Measuring point location	Active Area center point
Light source	Transmissive Mode: internal(Backlight)
Test pattern	All Pixels White Red.Green.Blue.White: Maximum colour saturation (maximum gradation level)
Contrast setting	Maximum

Definitions

Panel color coordinates according the CIE color system (CIE 1931). In general, It is always requested to measure the X, Y and Z values.

Here u', v' and L* are according CIE 1931:

$$x' = \frac{4 \cdot X}{X + 15 \cdot Y + 3 \cdot Z}$$

$$y' = \frac{9 \cdot Y}{X + 15 \cdot Y + 3 \cdot Z}$$

$$L^* = 116 \cdot \left(\frac{Y}{Y_n} \right)^{1/3} - 16$$


Color distance definition (maximum allowed color distance to specified typical color coordinate):

$$\Delta x' y' = \sqrt{\Delta x'^2 + \Delta y'^2}$$

Where:

$$\Delta x' = \text{Max} \left| x'_{\text{typ}} - x'_{\text{max}} \right|, \left| x'_{\text{typ}} - x'_{\text{min}} \right|$$

$$\Delta y' = \text{Max} \left| y'_{\text{typ}} - y'_{\text{max}} \right|, \left| y'_{\text{typ}} - y'_{\text{min}} \right|$$



Color Gamut definition:

$$F = \sqrt{s \left(\frac{a}{s} - a \right) \left(\frac{b}{s} - b \right) \left(\frac{c}{s} - c \right)} * 1000$$

Where

$$s = \frac{a + b + c}{2}$$

$$a = \sqrt{x'_{\text{blue}} - x'_{\text{red}}^2 + y'_{\text{blue}} - y'_{\text{red}}^2}$$

$$b = \sqrt{x'_{\text{blue}} - x'_{\text{green}}^2 + y'_{\text{blue}} - y'_{\text{green}}^2}$$

$$c = \sqrt{x'_{\text{red}} - x'_{\text{green}}^2 + y'_{\text{red}} - y'_{\text{green}}^2}$$




Color Gamut Ratio (NTSC) related to NTSC':

NTSC: =F (display)/F (NTSC')

NTSC' primaries:

	x'	y'
Red	0.67	0.33
Green	0.21	0.71
Blue	0.14	0.08

F (NTSC') =74.42

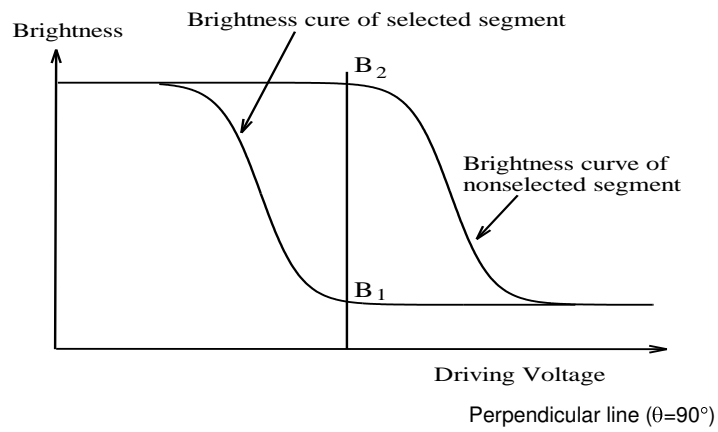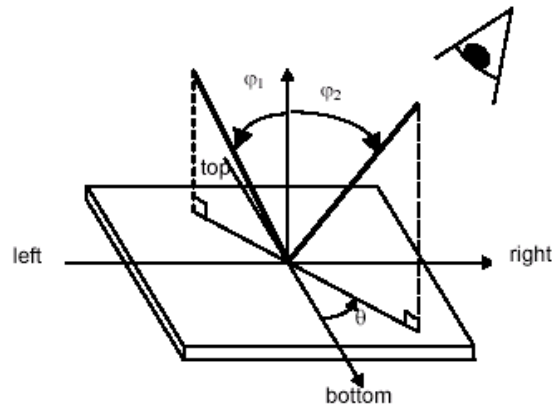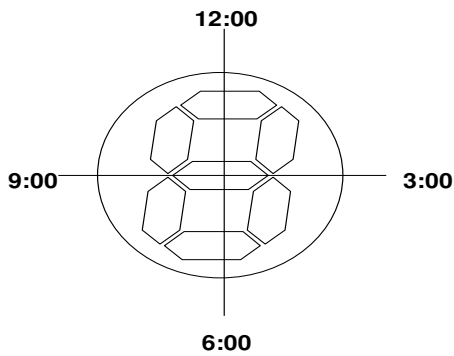

◆ INSPECTION CRITERION

This specification is made to be used as the standard acceptance/rejection criteria for Color mobile phone LCM.

1 Sample plan

Sampling method shall be in accordance with MIL-STD-105D, inspection level II and based on:


Major defect: AQL 0.65

Minor defect: AQL 1.5

2. Inspection condition

Viewing distance for cosmetic inspection is about 30cm with bare eyes, and under an environment of 20~40W light intensity, all directions for inspecting the sample should be within 45° against perpendicular line.

3. Definition of inspection zone in LCD.

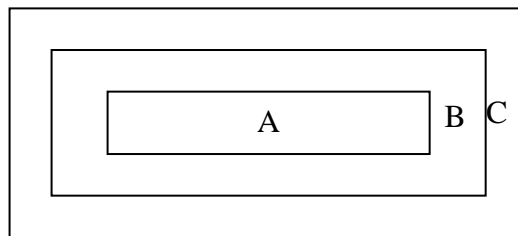

Zone A: character/Digit area

Zone B: viewing area except Zone A (ZoneA+ZoneB=minimum Viewing area)

Zone C: Outside viewing area (invisible area after assembly in customer's product)

Fig.1 Inspection zones in an LCD.

Note: As a general rule, visual defects in Zone C are permissible, when it is no trouble for quality and assembly of customer's product.

4. Inspection standards

4.1 Major Defect

Item No	Items to be inspected	Inspection Standard	Classification of defects
4.1.1	All functional defects	1) No display 2) Display abnormally 3) Missing vertical , horizontal segment 4) Short circuit 5) Back-light no lighting, flickering and abnormal lighting.	Major
4.1.2	Missing	Missing component	
4.1.3	Outline dimension	Overall outline dimension beyond the drawing is not allowed.	




4.2 Cosmetic Defect

Item No	Items to be inspected	Inspection Standard	Classification of defects																						
4.2.1	Clear Spots	For dark/white spot, size Φ is defined as $\Phi = \frac{(x+y)}{2}$	Minor																						
	Black and white Spot defect Pinhole, Foreign Particle, Dirt under polarizer	1 . <table border="1"> <thead> <tr> <th rowspan="2">Size(mm)</th> <th colspan="3">Acceptable Qty</th> </tr> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.1$</td> <td colspan="3">Ignore</td> </tr> <tr> <td>$0.10 < \Phi \leq 0.2$</td> <td colspan="3">3</td> </tr> <tr> <td>$0.2 < \Phi \leq 0.3$</td> <td colspan="3">2</td> </tr> <tr> <td>$\Phi > 0.3$</td> <td colspan="3">0</td> </tr> </tbody> </table>		Size(mm)	Acceptable Qty			A	B	C	$\Phi \leq 0.1$	Ignore			$0.10 < \Phi \leq 0.2$	3			$0.2 < \Phi \leq 0.3$	2			$\Phi > 0.3$	0	
Size(mm)	Acceptable Qty																								
	A	B	C																						
$\Phi \leq 0.1$	Ignore																								
$0.10 < \Phi \leq 0.2$	3																								
$0.2 < \Phi \leq 0.3$	2																								
$\Phi > 0.3$	0																								
	Dim Spots	2.	Minor																						
	Circle shaped and dim edged defects	<table border="1"> <thead> <tr> <th rowspan="2">2. Zone Size(mm)</th> <th colspan="3">Acceptable Qty</th> </tr> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.2$</td> <td colspan="3">Ignore</td> </tr> <tr> <td>$0.20 < \Phi \leq 0.40$</td> <td colspan="3">2</td> </tr> <tr> <td>$0.40 < \Phi \leq 0.60$</td> <td colspan="3">1</td> </tr> <tr> <td>$0.60 < \Phi$</td> <td colspan="3">0</td> </tr> </tbody> </table>		2. Zone Size(mm)	Acceptable Qty			A	B	C	$\Phi \leq 0.2$	Ignore			$0.20 < \Phi \leq 0.40$	2			$0.40 < \Phi \leq 0.60$	1			$0.60 < \Phi$	0	
2. Zone Size(mm)	Acceptable Qty																								
	A	B	C																						
$\Phi \leq 0.2$	Ignore																								
$0.20 < \Phi \leq 0.40$	2																								
$0.40 < \Phi \leq 0.60$	1																								
$0.60 < \Phi$	0																								

4.2. Cosmetic Defect

Item No	Items to be inspected	Inspection Standard	Classification of defects																																	
4.2.2	Line defect Black line, White line, Foreign material under polarizer,	<table border="1"> <thead> <tr> <th colspan="2" data-bbox="437 286 863 342">Size(mm)</th> <th colspan="3" data-bbox="863 286 1201 342">Acceptable Qty</th> </tr> <tr> <th data-bbox="437 342 627 421" rowspan="2">L(Length)</th> <th data-bbox="627 342 863 421" rowspan="2">W(Width)</th> <th colspan="3" data-bbox="863 342 1201 387">Zone</th> </tr> <tr> <th data-bbox="863 387 983 421">A</th> <th data-bbox="983 387 1086 421">B</th> <th data-bbox="1086 387 1201 421">C</th> </tr> </thead> <tbody> <tr> <td data-bbox="437 421 627 488">Ignore</td> <td data-bbox="627 421 863 488">$W \leq 0.02$</td> <td colspan="3" data-bbox="863 421 1201 488">Ignore</td> </tr> <tr> <td data-bbox="437 488 627 555">$L \leq 3.0$</td> <td data-bbox="627 488 863 555">$0.02 < W \leq 0.03$</td> <td colspan="3" data-bbox="863 488 1201 555">2</td> </tr> <tr> <td data-bbox="437 555 627 633">$L \leq 2.0$</td> <td data-bbox="627 555 863 633">$0.03 < W \leq 0.05$</td> <td colspan="3" data-bbox="863 555 1201 633">1</td> </tr> <tr> <td data-bbox="437 633 627 723"></td> <td data-bbox="627 633 863 723">$0.05 < W$</td> <td colspan="3" data-bbox="863 633 1201 723">Define as spot defect</td> </tr> </tbody> </table>	Size(mm)		Acceptable Qty			L(Length)	W(Width)	Zone			A	B	C	Ignore	$W \leq 0.02$	Ignore			$L \leq 3.0$	$0.02 < W \leq 0.03$	2			$L \leq 2.0$	$0.03 < W \leq 0.05$	1				$0.05 < W$	Define as spot defect			Minor
Size(mm)		Acceptable Qty																																		
L(Length)	W(Width)	Zone																																		
		A	B	C																																
Ignore	$W \leq 0.02$	Ignore																																		
$L \leq 3.0$	$0.02 < W \leq 0.03$	2																																		
$L \leq 2.0$	$0.03 < W \leq 0.05$	1																																		
	$0.05 < W$	Define as spot defect																																		
4.2.3	Polarizer scratch	<p>If the Polarizer scratch can be seen after mobile phone cover assembling or in the operating condition, judge by the line defect of 4.2.2.</p> <p>If the Polarizer scratch can be seen only in non-operating condition or some special angle, judge by the following.</p> <table border="1"> <thead> <tr> <th colspan="2" data-bbox="421 1003 839 1059">Size(mm)</th> <th colspan="3" data-bbox="839 1003 1137 1059">Acceptable Qty</th> </tr> <tr> <th data-bbox="421 1059 619 1171" rowspan="2">L(Length)</th> <th data-bbox="619 1059 839 1171" rowspan="2">W(Width)</th> <th colspan="3" data-bbox="839 1059 1137 1115">Zone</th> </tr> <tr> <th data-bbox="839 1115 914 1171">A</th> <th data-bbox="914 1115 999 1171">B</th> <th data-bbox="999 1115 1137 1171">C</th> </tr> </thead> <tbody> <tr> <td data-bbox="421 1171 619 1238">Ignore</td> <td data-bbox="619 1171 839 1238">$W \leq 0.03$</td> <td colspan="3" data-bbox="839 1171 1137 1238">Ignore</td> </tr> <tr> <td data-bbox="421 1238 619 1305">$5.0 < L \leq 10.0$</td> <td data-bbox="619 1238 839 1305">$0.03 < W \leq 0.05$</td> <td colspan="3" data-bbox="839 1238 1137 1305">2</td> </tr> <tr> <td data-bbox="421 1305 619 1384">$L \leq 5.0$</td> <td data-bbox="619 1305 839 1384">$0.05 < W \leq 0.08$</td> <td colspan="3" data-bbox="839 1305 1137 1384">1</td> </tr> <tr> <td data-bbox="421 1384 619 1451"></td> <td data-bbox="619 1384 839 1451">$0.08 < W$</td> <td colspan="3" data-bbox="839 1384 1137 1451">0</td> </tr> </tbody> </table>	Size(mm)		Acceptable Qty			L(Length)	W(Width)	Zone			A	B	C	Ignore	$W \leq 0.03$	Ignore			$5.0 < L \leq 10.0$	$0.03 < W \leq 0.05$	2			$L \leq 5.0$	$0.05 < W \leq 0.08$	1				$0.08 < W$	0			Minor
Size(mm)		Acceptable Qty																																		
L(Length)	W(Width)	Zone																																		
		A	B	C																																
Ignore	$W \leq 0.03$	Ignore																																		
$5.0 < L \leq 10.0$	$0.03 < W \leq 0.05$	2																																		
$L \leq 5.0$	$0.05 < W \leq 0.08$	1																																		
	$0.08 < W$	0																																		
4.2.4	Polarize Air bubble	<p>Air bubbles between glass & polarizer</p> <table border="1"> <thead> <tr> <th data-bbox="421 1541 643 1653" rowspan="2">2. Zone Size(mm)</th> <th colspan="3" data-bbox="643 1541 1137 1597">Acceptable Qty</th> </tr> <tr> <th data-bbox="643 1597 802 1653">A</th> <th data-bbox="802 1597 967 1653">B</th> <th data-bbox="967 1597 1137 1653">C</th> </tr> </thead> <tbody> <tr> <td data-bbox="421 1653 643 1731">$\Phi \leq 0.2$</td> <td colspan="3" data-bbox="643 1653 1137 1731">Ignore</td> </tr> <tr> <td data-bbox="421 1731 643 1798">$0.20 < \Phi \leq 0.30$</td> <td colspan="3" data-bbox="643 1731 1137 1798">2</td> </tr> <tr> <td data-bbox="421 1798 643 1877">$0.30 < \Phi \leq 0.50$</td> <td colspan="3" data-bbox="643 1798 1137 1877">1</td> </tr> <tr> <td data-bbox="421 1877 643 1944">$0.50 < \Phi$</td> <td colspan="3" data-bbox="643 1877 1137 1944">0</td> </tr> </tbody> </table>	2. Zone Size(mm)	Acceptable Qty			A	B	C	$\Phi \leq 0.2$	Ignore			$0.20 < \Phi \leq 0.30$	2			$0.30 < \Phi \leq 0.50$	1			$0.50 < \Phi$	0			Minor										
2. Zone Size(mm)	Acceptable Qty																																			
	A	B	C																																	
$\Phi \leq 0.2$	Ignore																																			
$0.20 < \Phi \leq 0.30$	2																																			
$0.30 < \Phi \leq 0.50$	1																																			
$0.50 < \Phi$	0																																			

4.3. Cosmetic Defect

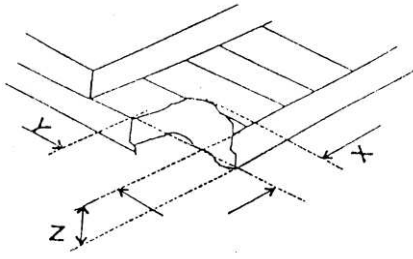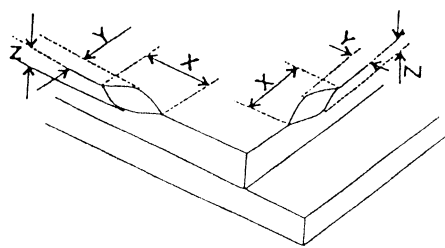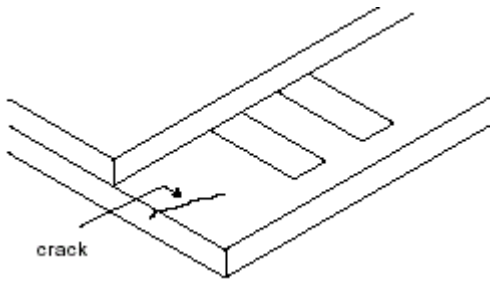Item No	Items to be inspected	Inspection Standard	Classification of defects						
4.3.5	Glass defect	<p>(i) Chips on corner</p>  <table border="1" data-bbox="478 604 1117 705"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>≤ 2.0</td> <td>≤ S</td> <td>Disregard</td> </tr> </tbody> </table> <p>Notes: S=contact pad length Chips on the corner of terminal shall not be allowed to extend into the ITO pad or expose perimeter seal.</p>	X	Y	Z	≤ 2.0	≤ S	Disregard	Minor
		X	Y	Z					
		≤ 2.0	≤ S	Disregard					
<p>(ii) Usual surface cracks</p>  <table border="1" data-bbox="454 1153 1141 1254"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>≤ 3.0</td> <td>< Inner border line of the seal</td> <td>Disregard</td> </tr> </tbody> </table>	X	Y	Z	≤ 3.0	< Inner border line of the seal	Disregard	Minor		
X	Y	Z							
≤ 3.0	< Inner border line of the seal	Disregard							
<p>(iii) Crack Cracks tend to break are not allowed.</p> 	Major								
4.3.6	Parts alignment	<p>1) Not allow IC and FPC/heat-seal lead width is more than 50% beyond lead pattern. 2) Not allow chip or solder component is off center more than 50% of the pad outline.</p>	Minor						
4.3.7	SMT	According to the <Acceptability of electronic assemblies> IPC-A-610C class 2 standard. Component missing or function defect are Major defect, the others are Minor defect.							

◆ PRECAUTIONS FOR USING LCD MODULES

Handling Precautions

(1) The display panel is made of glass and polarizer. As glass is fragile. It tends to become or chipped during handling especially on the edges. Please avoid dropping or jarring. Do not subject it to a mechanical shock by dropping it or impact.

(2) If the display panel is damaged and the liquid crystal substance leaks out, be sure not to get any in your mouth. If the substance contacts your skin or clothes, wash it off using soap and water.

(3) Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary. Do not touch the display with bare hands. This will stain the display area and degraded insulation between terminals (some cosmetics are determined to the polarizer).

(4) The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully. Do not touch, push or rub the exposed polarizer's with anything harder than an HB pencil lead (glass, tweezers, etc.). Do not put or attach anything on the display area to avoid leaving marks on. Condensation on the surface and contact with terminals due to cold will damage, stain or dirty the polarizer. After products are tested at low temperature they must be warmed up in a container before coming is contacting with room temperature air.

(5) If the display surface becomes contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If it is heavily contaminated, moisten cloth with one of the following solvents

- Isopropyl alcohol
- Ethyl alcohol

Do not scrub hard to avoid damaging the display surface.

(6) Solvents other than those above-mentioned may damage the polarizer. Especially, do not use the following.

- Water
- Ketone
- Aromatic solvents

Wipe off saliva or water drops immediately, contact with water over a long period of time may cause deformation or color fading. Avoid contacting oil and fats.

(7) Exercise care to minimize corrosion of the electrode. Corrosion of the electrodes is accelerated by water droplets, moisture condensation or a current flow in a high-humidity environment.

(8) Install the LCD Module by using the mounting holes. When mounting the LCD module make sure it is free of twisting, warping and distortion. In particular, do not forcibly pull or bend the I/O cable or the backlight cable.

(9) Do not attempt to disassemble or process the LCD module.

(10) NC terminal should be open. Do not connect anything.

(11) If the logic circuit power is off, do not apply the input signals.

(12) Electro-Static Discharge Control , Since this module uses a CMOS LSI, the same careful attention should be paid to electrostatic discharge as for an ordinary CMOS IC. To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.

- Before remove LCM from its packing case or incorporating it into a set, be sure the module and your body have the same electric potential. Be sure to ground the body when handling the LCD modules.

- Tools required for assembling, such as soldering irons, must be properly grounded. Assure that for certain the AC power source for the soldering iron does not leak. When using an electric screwdriver to attach LCM, the screwdriver should be of ground potentiality to minimize as much as possible any transmission of electromagnetic waves produced sparks coming from the communicator of the motor.

- To reduce the amount of static electricity generated, do not conduct assembling and other work under dry conditions. To reduce the generation of static electricity be careful that the air in the work is not too dried. A relative humidity of 50%-60% is recommended. As far as possible make the electric potential of your work clothes and that of the work bench the ground potential

- The LCD module is coated with a film to protect the display surface. Exercise care when peeling off this protective film since static electricity may be generated

(13) Since LCM has been assembled and adjusted with a high degree of precision, avoid applying excessive shocks to the module or making any alterations or modifications to it.

- Do not alter, modify or change the shape of the tab on the metal frame.
 - Do not make extra holes on the printed circuit board, modify its shape or change the positions of components to be attached.
 - Do not damage or modify the pattern writing on the printed circuit board.
 - Absolutely do not modify the zebra rubber strip (conductive rubber) or heat seal connector.
 - Except for soldering the interface, do not make any alterations or modifications with a soldering iron.
- Do not drop, bend or twist LCM.

Storage Precautions

When storing the LCD modules, the following precaution is necessary.

- (1) Store them in a sealed polyethylene bag. If properly sealed, there is no need for the dessicant.
- (2) Store them in a dark place. Do not expose to sunlight or fluorescent light, keep the temperature between 0°C and 35°C.
- (3) The polarizer surface should not come in contact with any other objects. (We advise you to store them in the container in which they were shipped).

Others

Liquid crystals solidify under low temperature (below the storage temperature range) leading to defective orientation or the generation of air bubbles (black or white). Air bubbles may also be generated if the module is subject to a low temperature.

If the LCD modules have been operating for a long time showing the same display patterns, the display patterns may remain on the screen as ghost images and a slight contrast irregularity may also appear. A normal operating status can be regained by suspending use for some time. It should be noted that this phenomenon does not adversely affect performance reliability.

To minimize the performance degradation of the LCD modules resulting from destruction caused by static electricity etc., exercise care to avoid holding the following sections when handling the modules.

- Exposed area of the printed circuit board.
- Terminal electrode sections.

Precautions for Operation

(1) Viewing angle varies with the change of liquid crystal driving voltage (VLCD). Adjust VLCD to show the best contrast.

(2) It is an indispensable condition to drive LCD's within the specified voltage limit since the higher voltage than the limit cause the shorter LCD life. An electrochemical reaction due to direct current causes LCD's undesirable deterioration, so that the use of direct current drive should be avoided.


(3) Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD's show dark color in them. However those phenomena do not mean malfunction or out of order with LCD's, Which will come back in the specified operating temperature.

(4) If the display area is pushed hard during operation, the display will become abnormal. However, it will return to normal if it is turned off and then back on.

(5) A slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit. Usage under the maximum operating temperature, 50%RH or less is required.

(6) Input each signal after the positive/negative voltage becomes stable.

(7) Please keep the temperature within specified range for use and storage. Polarization degradation, bubble generation or polarizer peel-off may occur with high temperature and high humidity.

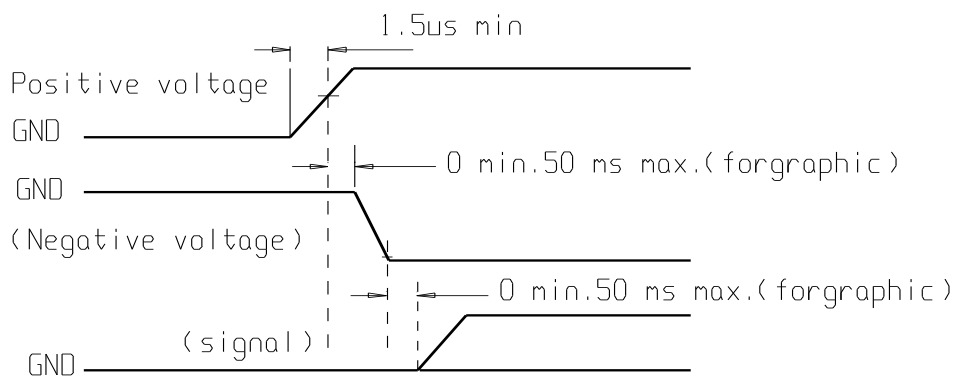

Safety

(1) It is recommended to crush damaged or unnecessary LCDs into pieces and wash them off with solvents such as acetone and ethanol, which should later be burned.

(2) If any liquid leaks out of a damaged glass cell and comes in contact with the hands, wash off thoroughly with soap and water.

Limited Warranty

Unless agreed between Shelly Associates Inc. and customer, Shelly Associates Inc. will replace or repair any of its LCD modules which are found to be functionally defective when inspected in accordance with Shelly Associates Inc. acceptance standards (copies available upon request) for a period of one year from date of shipments. Cosmetic/visual defects must be returned to Shelly Associates Inc. within 90 days of shipment. Confirmation of such date shall be based on freight documents. The warranty liability of Shelly Associates Inc. is limited to repair and/or replacement on the terms set forth above. Shelly Associates Inc. will not be responsible for any subsequent or consequential events.