







Rectangular Sure-Seal® Connector



Part Number
120-1873-007




Part Number
120-1874-007

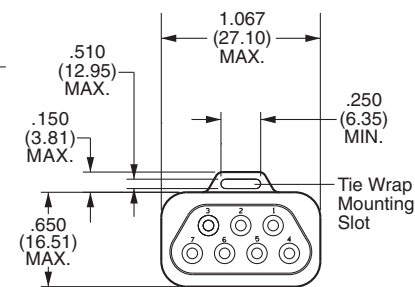


Accessories

Sealing Screws

Sealing screws are designed with a groove underneath the head to incorporate an O-ring. When tightened, the O-ring is compressed against the connector flange to form an air, water, and gas-tight seal. Sealing screws are used in conjunction with the nutplates below.



(S) Slotted Pan Head




(R) Phillips Pan Head

Part Number	Thread	Length	C Max	D Max	Clear Hole	
					Min	Max
S-440-1/2	4-40NC-2A	1/2"	.220"	.069"	.125"	.129"
R-440-1/2	4-40NC-2A	1/2"	.238"	.080"	.125"	.129"

Nut Plates

Nutplates should be used in conjunction with mounting plates. Nutplates eliminate the need for loose nuts which are often difficult to negotiate in confined areas. As well, they effectively distribute the screw tension across the back of the panel. The bracket is aluminum alloy with Alodine plating, and the nuts are steel alloy plated cadmium. Nutplates mate with above sealing screws.

Nut Plate P/N (uses 4-40 screws)	For Sure Seal P/Ns
M85528/2-14A	120-8552-200 120-8552-201 120-8552-202
M85528/2-18A	120-8552-305 120-8552-306 120-8552-307



Alcohol Pen

Isopropyl alcohol is the only lubricant recommended by Sure Seal Connections to ease insertion of contacts into the Sure Seal connector cavity. This pen is small and easy to manipulate, dispensing as much or as little alcohol as needed directly onto the contact or into the cavity. Perfect for tool kits, shirt pockets, or anywhere a larger container might be inconvenient.



Part Number
1610N