



Overview

MCLASS enclosures are engineered to house FlexPower® power management boards alongside access hardware in one compact, secure system.

This unit is a 12V and 24V DC dual voltage access power system.

C8 lock control module provide eight access control inputs capable of voltage or dry contact activation, and eight outputs programmable for failsafe / failsecure operation at either 12 or 24 VDC and controlled by the integrated fire alarm interface circuit on the FPO. D8 module provides eight auxiliary class II outputs and each output is configurable for 12 or 24VDC operation.

MClass enclosures are painted steel with removable backplate and include lock, two (2) keys and tamper switch.

System Features

- ◆ **FPO offline power supply**
 - 120 or 230 VAC input
 - 12 and 24 VDC outputs
 - On board Fire Alarm Interface
 - Continuous and resettable DC
- ◆ **Distributed outputs**
 - 8 auxiliary, class II power limited at 2.5A each
 - 8 controlled, fused at 3A each
- ◆ **Remote Monitoring & Control option**
 - Live voltage / current reporting
 - Remote battery load testing
 - Output power cycling and abnormal operation alert
 - System / AC fault reporting

Enclosure Features

- ◆ **Labor saving design**
 - Pre-wired FlexPower section
 - Pre-formed knockouts
 - Removeable backplate simplifies instal
 - Pre-defined hole pattern for power section
 - Access panels mount on predefined stud mounts - no drilling required
- ◆ **Other refinements**
 - 4.5" enclosure depth fits 12Ah battery
 - Wire management room
 - Tamper switch, lock, dual key set standard

Lifetime Warranty

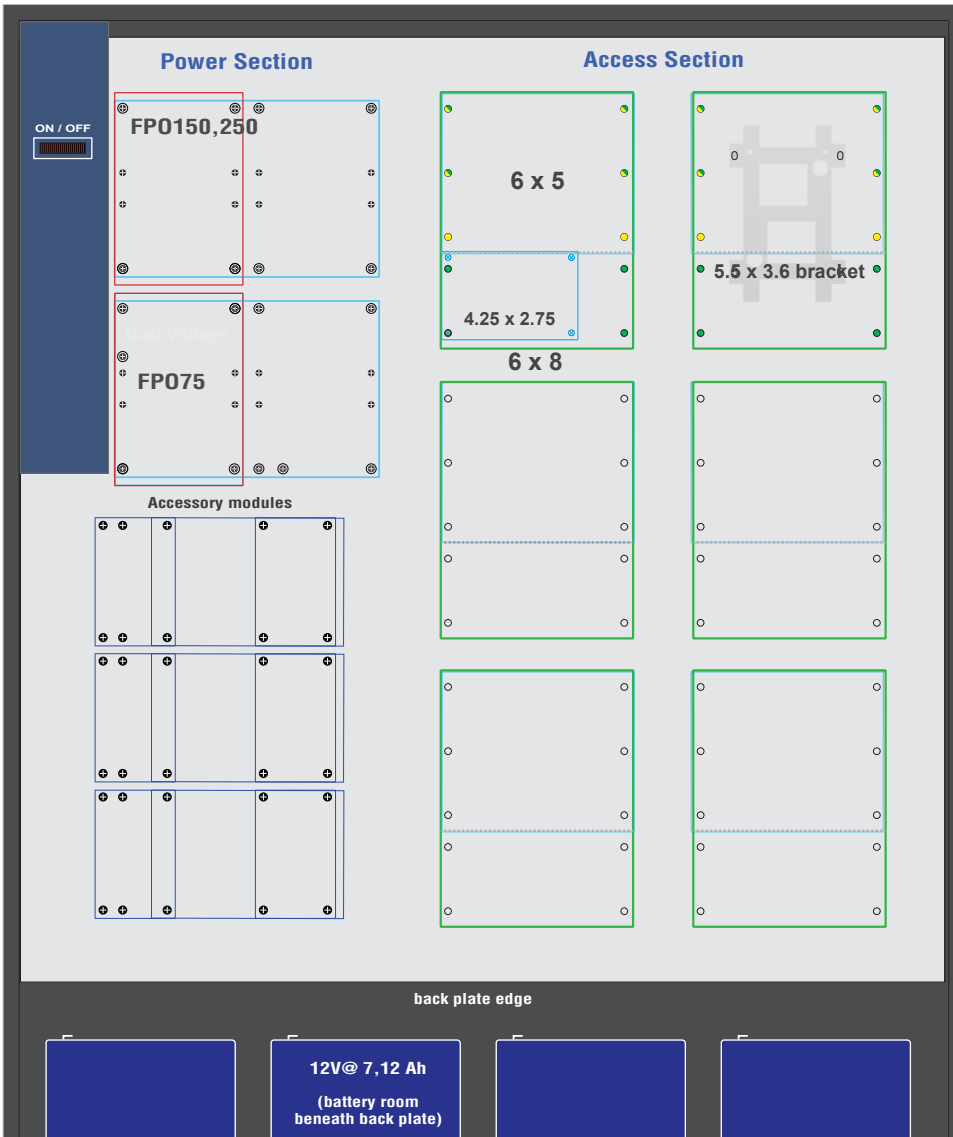


Ordering	Description
FP075/150-C8D8PE8M	225W (12V & 24V) 8 aux/lock outputs, MCLASS enclosure
Enclosure: 36.00H x 30.00W x 4.50D in. / 75 lbs	





Specifications

Input Power	Input 120/230 VAC 50/60 Hz 225 Watts combined power (1.9A) Overload and short circuit protection Over temperature protection Polarized AC power supply disconnect
Output Power	FP075: 12V/6A or 24V/3A 75 Watts FP0150: 12V/12A or 24V/6A 150 Watts Outputs: Continuous (DC1) Resettable (DC2) 8 auxiliary outputs, class II power limited at 2.5A each 8 lock outputs, fused at 3A each 120 mV output voltage ripple System Efficiency: 87% System BTU Rating: 99 BTU/Hr
Battery Charging	Independent built-in 2A charger for sealed lead acid or gel type batteries Microprocessor dual rate charging of 12 or 24 V battery sets Automatic switchover to standby battery when AC fails Zero voltage drop when switched over to battery backup
Supervision	AC Fail (form "C" contacts) System fail (form "C" contacts) may be triggered by low/no battery, short to earth ground and power supply failure
Visual Indicators	AC input, DC1 and DC2 output System fault AC fault Short to earth ground Reverse battery polarity Fire Alarm Input activated D8P output status C8 output and fault status
Regulatory Compliance	UL294 and 1076 Class 2 / FCC / CSFM
Physical Dimensions	Enclosure: 36.00H x 30.00W x 4.50D in. (91.00 x 76.00 x 11.50 cm)
Access Mounting	EP1501, EP1502, EP2500, MR50, MR51e, MR52, MR16, LNL-500, 1100, 1200, 1300, 1320, 2000, 2210, 2220, 3300

E8M backplate mounting pattern for power and access boards



MAX ACCESS ACCOMMODATION

-  **(6) slots** 6 x 8 board size
-  **(6) slots** 6 x 5 board size
-  **(1) slots** 5.5 x 3.6 (bracket)
-  **(1) slot** 4.25 x 2.75 board size

lifesafetypower.com

(888) 577-2898
 info@lifesafetypower.com

Specifications subject to change without notice.

© 2014 LifeSafety Power Inc. All rights reserved. LifeSafety Power and FlexPower are registered trademarks of LifeSafety Power Inc. All other trademarks and copyrights are the property of their respective owners.

P01-588 07/14

LifeSafety Power, Inc.
 750 Tower Road, Unit B
 Mundelein, IL 60060 USA