


Coaxial Adapters



Models 1587, 1588 & 1589 Precision Coaxial Adapters

dc to 26.5 GHz

Ruggedized SMA to SMA Connectors

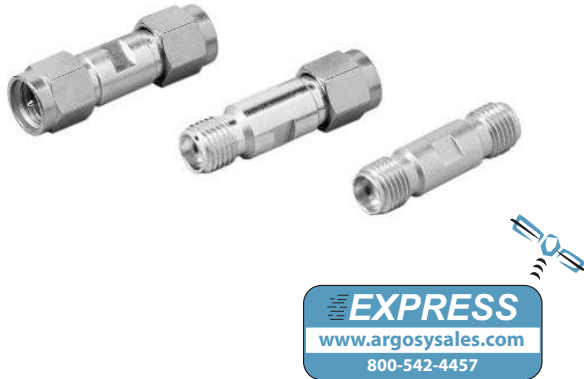

Features

- /// High Repeatability.
- /// Rugged Injection Molded Connectors.
- /// Designed for Measurement System Use - Auxiliary wrench flats aid in torquing connections without "chain reaction" loosening of multiple component hookups.

Specifications

NOMINAL IMPEDANCE: 50 Ω

FREQUENCY RANGE: dc to 26.5 GHz

MAXIMUM SWR:	
Frequency (GHz)	SWR
dc - 18	1.15
18 - 26.5	1.20

INSERTION LOSS & REPEATABILITY (dB):		
Frequency (GHz)	Ins Loss	Repeatability
dc - 12.4	< 0.30	0.01
12.4 - 18	< 0.40	0.02
18 to 26.5	< 0.50	0.02

TEMPERATURE RANGE: -55°C to +100°C


CONSTRUCTION: Inner and outer conductors: heat treated beryllium copper, gold plated.

CONNECTORS: SMA connectors per MIL-STD-348 interface dimensions - mate nondestructively with MIL-C-39012 connectors.


WEIGHT: 56.7 g (2 oz) maximum

PHYSICAL DIMENSIONS:


MODEL 1587:

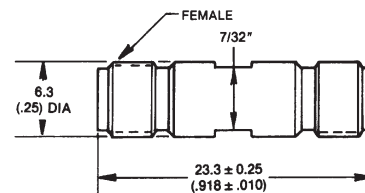

MODEL 1588:

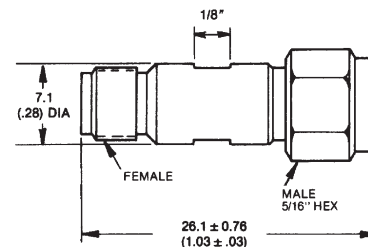

MODEL 1589:



NOTE:

1. All dimensions are given in mm (inches) and are maximum, unless otherwise specified.
2. Unit available with RoHS compliant materials, specify when ordering.