




### ELECTRICAL RATINGS

Parameter	FPA300A	Unit
Input Voltage	120	VAC
Input Power (nominal)	300	VA
Output Voltage	24 or 28	VAC
Output Current	12.5 or 10.7	Amps
BTU Rating	102	BTU/Hr
Continuous Power Outputs	16	

Model No.	Type	Mechanical Info
FPA300A-2A8E5	Fused	Size: 8.5" x 11" x 3"
FPA300A-2A8PE5	Power Limited	Weight: 6 lb.

### FlexPower Numbering System

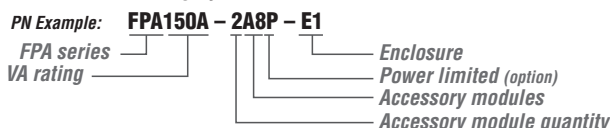

### DESCRIPTION

The FLEXPOWER FPA300A-2A8E5 is a dual voltage, AC camera power supply system specifically designed for the CCTV segment of the lifesafety industry. Providing 16 outputs, the unit is configured in a painted, steel, locking enclosure.

Each output is individually protected and selectable for 24/28VAC and provides visual indication of AC output voltage.

Configuration options:

- ◆ 3A fused (FPA300A-2A8E5)
- ◆ 2.5A Class 2, power limited (FPA300A-2A8PE5)

### FEATURES

- Agency Listed for CCTV and Access Control
- **FlexPower** Feature Set
  - ◆ **VSelect** Installer selectable 24 or 28VAC output voltage
  - ◆ **FlexConnect** Dual voltage bus / pre-wired accessory board interconnects
  - ◆ **Reliability** Fiberglass PCBs
  - ◆ **GreenSmart** RoHS compliant, lead free manufacturing
  - ◆ **DataLink** Network communication (with optional NLR kit)
  - ◆ **PowerCom** Power system management software (via NLR kit)
- **System Benefits**
  - ◆ Fully modular power management system
  - ◆ Multiple outputs for camera power and additional accessory power distribution modules
  - ◆ Small, single enclosure requires minimal wall space
  - ◆ Quality controlled manufacturing process
- **Remote Power Reset - option** (U.S. Patent 8,566,651)
  - ◆ Adding NLR module to the system enables
    - Remote power reset via WAN/LAN network connection
    - Individual On/Off control of two independent outputs to remotely reset frozen cameras, NVRs, DVRs etc
    - External event activation
  - ◆ For remote reset option order Model No. FPA300AR-2A8E1
- **Lifetime Warranty**

### POWER DISTRIBUTION MODULE (A8, A8P)

- Eight power distribution outputs Individually programmable to a continuous output drawn from either buss 1 or buss 2, typically used to program an output for either 24 or 28VAC
  - ◆ **A8** 3A fused per output
  - ◆ **A8P** 2.5A class 2, power limited per output
- AC Presence: Green LED per output
- Removable terminals: accepts #14 to #24 AWG

### AGENCY LISTINGS

#### USA

UL 2044  
UL 294

#### Canada

CSA C22.2 #107.1  
Ontario Province Registered



**Worldwide Headquarters**  
**LifeSafety Power, Inc.**  
750 Tower Road, Unit B  
Mundelein, IL 60060 USA  
PH 888-577-2898  
info@lifesafetypower.com

***Important:** All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their particular application. LifeSafety Power makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. LifeSafety Power's only obligations are those in the LifeSafety Power Standard Terms and Conditions of Sale for this product, and in no case will LifeSafety Power or its distributors be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, LifeSafety Power reserves the right to make changes—without notification to Buyer—to processing or materials that do not affect compliance with any applicable specification.*