

DC BLOCKING TERMINATIONS

SMA, 30 kHz - 18 GHz, Inner Only

SPECIFICATIONS:

Models: 8530SM, 8530SF

RoHS
Compliant

Electrical:


Frequency Range _____ 30 KHz - 18 GHz
VSWR _____ 1.35:1 Max.
Impedance _____ 50 Ohms
Voltage Rating _____ 100 Volts Max DC
Operating Temp. Range _____ +10°C to +85°C

Mechanical:


Connectors _____ Passivated Stainless Steel
Mates with MIL-STD-348
Conductors _____ Gold Plated Beryllium Copper

AEROFLEX
A passion for performance.

Model Number: **8530SM**
SMA Male Connector

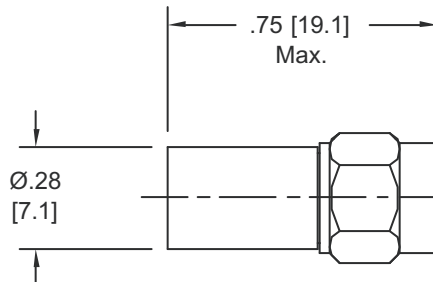

Model Number: **8530SF**
SMA Female Connector

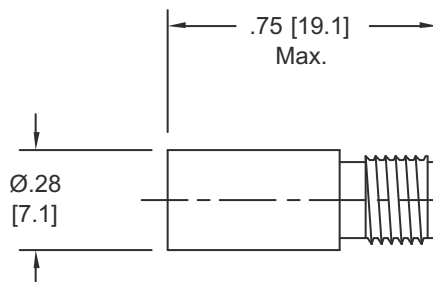

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

8530S: REV D

AEROFLEX
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex.com/inmet • inmet-sales@eroflex.com