


# T-BERD®/MTS-2000/-4000 Platforms

## COSA-4055 CWDM Optical Spectrum Analyzer Module

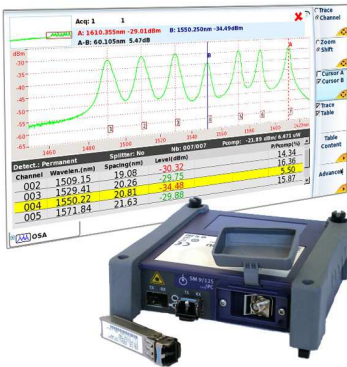

### Key Benefits

- A low-cost alternative for standard OSA
- Measure spectrum on the full CWDM wavelength range with complete spectral trace and wavelength/power results in under 4 seconds
- Simulate a CWDM transmitter for insertion loss testing and end-to-end continuity check

### Key Features

- 1260 to 1625 nm wavelength range
- 8 nm minimum channel spacing
- ITU-T G. 694.2 CWDM wavelength and customized grids
- Power and wavelength drift test application
- Compliant with ITU-T G.695 and G674.2 standards
- Optional slots for up to two SFP CWDM transceivers

### Applications

- Verify metro access network performance
- Maintain and troubleshoot CWDM networks
- Conduct spectral and drift testing on CWDM sources

The JDSU COSA-4055 module offers a new generation of coarse wavelength division multiplexer (CWDM) analyzers. Until now, large and expensive optical spectrum analyzers (OSA) were used to precisely test wavelength and power levels in CWDM networks, and optical channel checkers were used to verify optical channel presence. The JDSU COSA-4055 module now offers the functionality and speed of an OSA in a handheld form factor at a fraction of the price.

Housed in a T-BERD/MTS-2000 or T-BERD/MTS-4000 platform, the JDSU COSA-4055 is the ideal handheld CWDM analyzer for field service groups to install, maintain, and upgrade CWDM systems.

### Platform Compatibility

T-BERD/MTS-2000



One-slot handheld modular platform for testing fiber networks

T-BERD/MTS-4000



Two-slot handheld modular platform for testing fiber, copper, and multiple services

*CWDM is based on the same concept as DWDM using multiplexed light wavelengths on a single fiber. Wavelengths are limited to 18 channels with 20 nm spacing per ITU standards.*

*Measuring OSNR is not required for non-amplified/passive CWDM links.*

## Testing CWDM Networks with a COSA-4055 Module

### CWDM Multivendor Compatibility

ITU-T G.695 recommendation aims to promote vendor interoperability by specifying transmitter/multiplexer characteristics at one end of the CWDM link and the demultiplexer/receiver at the other end. ITU-T G694.2 recommendation specifies the spectral grid for CWDM applications with 18 channels from 1271 to 1611 nm, with a 20 nm channel spacing. To guarantee multivendor compatibility it is important to verify the optical interface parameters according to these recommendations. The COSA-4055 is the ideal tool for checking the critical parameters such as Tx output power and Rx input power and the central wavelengths when installing, commissioning, and troubleshooting CWDM networks as well as for ensuring interface compatibility with different vendors.

### Transmitter Wavelength and Output Power

In CWDM networks, transmitter lasers are not equipped with a cooling system, thus temperature variations can cause a drift of the central wavelength and the power level. Every channel wavelength must be checked to verify possible wavelength shifts or power loss. The COSA-4055 module can determine the compliance to the CWDM system specifications.

### Mux/Demux/OADM

Transmitters with a wavelength offset can create additional attenuation in the multiplexers and demultiplexers. When test access points are available, technicians can check a wavelength's presence and its associated power level to verify that all transmitted wavelengths have been correctly multiplexed without excess power loss on one of the channels.

### Receiver Wavelength and Input Power


Similar tests like those conducted at the mux/demux must be performed to verify channel wavelengths and power levels. A wavelength drift in the transmitter can also create power drift which can cause bit errors; therefore, it is important to monitor the evolution of channel power and wavelength over time.

### Continuity


The pluggable SFP transceivers in the COSA can be used to test the link between the headend and the end customer, when a system transceiver is unavailable. It is important to verify the link loss per wavelength and guarantee the continuity of the connection over multiplexers, demultiplexers, and optical add-drop multiplexers (OADMs).

### OSNR Testing


CWDM networks are for shorter-distance applications that do not require amplified links, thus enabling the use of a wider transmission window between 1270 and 1610 nm where amplifiers are unavailable. In non-amplified passive CWDM links, the OSNR remains unchanged on both the transmitter and receiver sides, eliminating the need to measure OSNR.

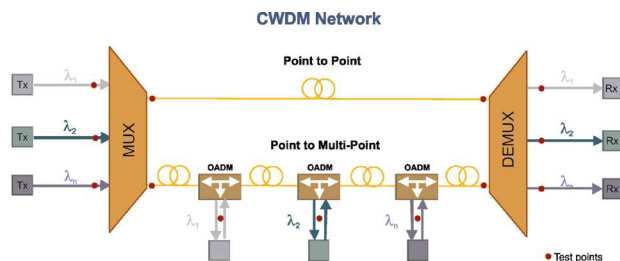


### 3

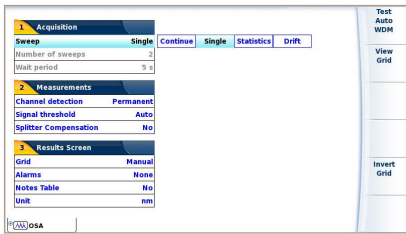


COSA acquisition menu

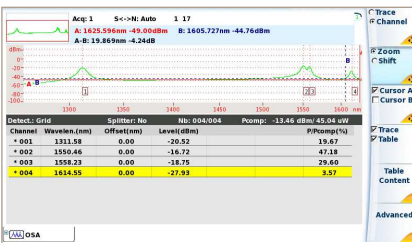

Spectral measurement displays trace and table

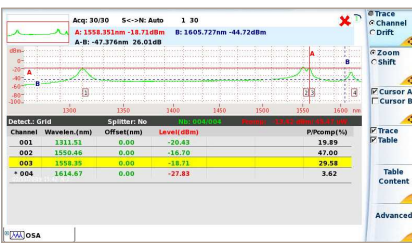

Automatic pass/fail results

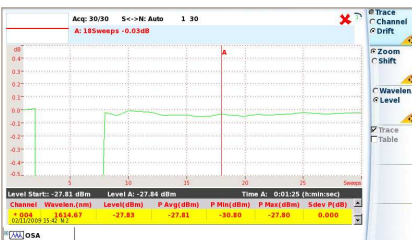

Drift power measurement

### Ease of use

One-button auto-testing guarantees that technician needs no special training to carry out a CWDM test, making JDSU's instrument suitable for both novice and expert technicians. An Auto-Test mode automatically identifies WDM channels, selects the appropriate wavelength range, and provides auto scaling and system qualification according to pre-defined parameters.

### Flexible measurement capability

In-depth analysis, featuring statistical, continue or single evaluation with automatic storage capabilities, is provided. Different measurement functions such as automatic channel detection, and pass/fail analysis against user-settable limits are available on the COSA-4055.

Furthermore, its tunable channel grid allows not only to measure according to the ITU-T G.694.2 CWDM wavelengths but also to use your own customized grid.

### High performance CWDM Testing

Full wavelength range 1260 to 1625 nm (Full band CWDM tester)

Fast scanning speed (<4s)

Real spectral measurements with:

- Complete spectral trace
- Tabular results of power and wavelength
- Zoom and marker functions

### Drift measurement for wavelength and power

For optical performance monitoring it is essential to measure the key parameters over time. The built-in drift test application provides the result of power and wavelength over a customer definable time in a graphical and numerical format. Drift measurements are important in CWDM networks with uncooled laser, which have a typical wavelength drift of 0.1nm/°C.

### SFP slot for CWDM transceivers

The COSA-4055 SFP bay version 2301/02 provides an integrated SFP slot to host up to 2 SFP CWDM transceivers.

The transceivers can be used to simulate CWDM transmitters for testing insertion loss per wavelength, and end-to-end continuity of a link in CWDM networks with mux/demux and OADMs.



# 4

## Specifications

### Modes

Operating modes	CWDM, drift
Display modes	Graph (trace + overview) CWDM table and graph + table
Measurement parameters	Channel #, power, wavelength, drift

### Power Measurement Ranges

Dynamic range	-55 to +10 dBm
Noise floor RMS	-55 dBm
Absolute accuracy <sup>2</sup>	±0.5 dB
Linearity <sup>3</sup>	±0.1 dB
Readout resolution	0.01 dB
Scanning time	< 4 s

### Optical Interfaces

Applicable fiber	SMF 9/125 μm
Interchangeable optical connectors	FC, SC, DIN, LC, and ST (PC type)
Optical return loss	>35 dB
Total safe power	+15 dBm

### Spectral Measurement Ranges

Wavelength range	1260 to 1625 nm
Wavelength accuracy <sup>1</sup>	±0.5 nm
Readout resolution	0.001 nm
Resolution bandwidth FWHM <sup>1</sup>	Typ. 4 nm
Minimum channel spacing <sup>4</sup>	8 nm

### Optical Port (Physical contact interfaces)

Input port	SM/PC
Interchangeable optical connectors	FC/SC/DIN/LC and ST
Optical return loss	>35 dB
Total safe power	+15 dBm

### General

Weight	0.35 kg (0.7 lb)
Dimensions (W x H x D)	128 x 134 x 40 mm (5.04 x 5.28 x 1.57 in)

### Temperature

Operation	-5 to +50°C (23 to 122°F)
Storage	-20 to +60°C (-4 to 140°F)

### SFP Bay (Version 2301/02 only)

Can host up to two SFP transceivers (not included)

1. At 23°C ±5°C
2. Typical at -6 dBm at CWDM wavelength grid including PDL
3. -45 dBm to +5 dBm, at 23 °C
4. Two channels at equal power level

## Ordering Information

Part Number	Description
2301/01	COSA-4055 CWDM analyzer
2301/02	COSA-4055 CWDM analyzer with SFP bay

## Application Software

Part Number	Description
EOFS100	Optical fiber trace for post-analysis
EOFS200	Optical fiber trace for cable acceptance report

## Adapters

Part Number	Description
2151/00.32	Universal optical ST adapter
2151/00.50	Universal optical DIN adapter
2151/00.51	Universal optical FC adapter
2151/00.58	Universal optical SC adapter
2151/00.59	Universal optical LC adapter

## Test & Measurement Regional Sales

<b>NORTH AMERICA</b> TOLL FREE: 1 855 ASK-JDSU 1 855 275-5378	<b>LATIN AMERICA</b> TEL: +1 954 688 5660 FAX: +1 954 345 4668	<b>ASIA PACIFIC</b> TEL: +852 2892 0990 FAX: +852 2892 0770	<b>EMEA</b> TEL: +49 7121 86 2222 FAX: +49 7121 86 1222	<a href="http://www.jdsu.com/test">www.jdsu.com/test</a>
---	--	---	---	--