


FSUP2027

Universal Adaptor Plate Portrait mode Only

Max boss patterns of 20" w x 27" h

WARNING: MONITOR THIS DIRECTION ONLY!

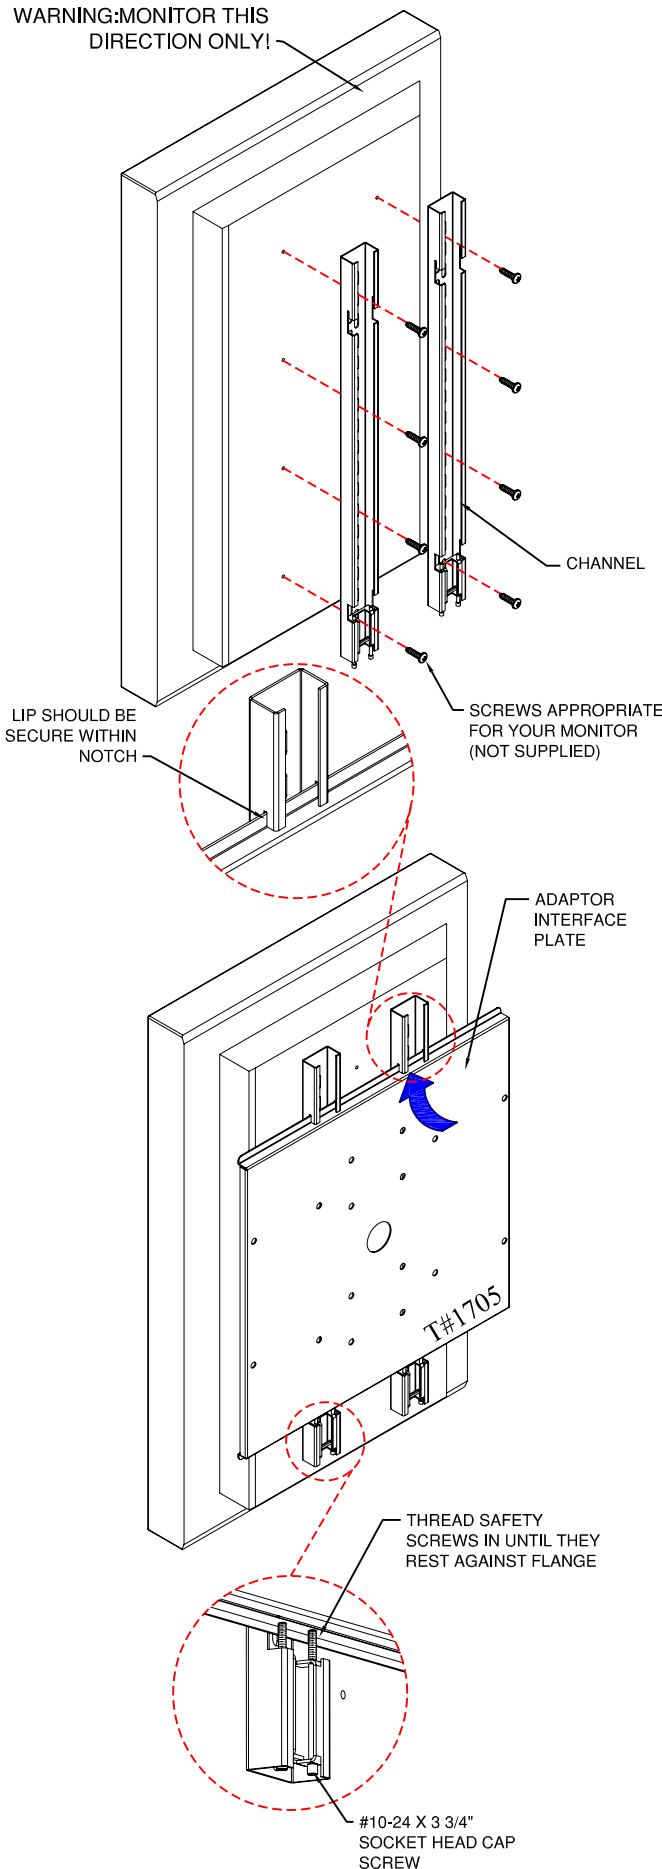

Align channel so the safety screws are located at bottom of monitor when assembled (Refer to Drawing) and channels are level and even at top. Attach channels to back of monitor using hardware appropriate to your unit.

NOTE: Installer needs to identify what size hardware is required. Once identified Lucasey can provide hardware for most applications.

Hardware can also be purchased through local hardware suppliers.

Attach adaptor interface plate to FS series mount. See flat screen bracket instructions for adaptor plate mounting detail.

Raise flat screen with attached channels to mount assembly. Hook the notch on channels over lips on adaptor interface plate (Refer to drawing).

Center monitor on assembly and secure by threading safety screws in until the tips contact flange (Do not over tighten).

DIMPLED OR RECESSED BOSS MOUNTING INSTRUCTIONS

Thread appropriate size set screw into boss and secure with a nut.

Thread a second nut (leveling nut) onto set screw, place a washer on top of nut and adjust nut so that the washer is level with surface of monitor. Adjust all leveling nuts to equal height.

Place channels onto set screw with channels safety screws located at bottom of monitor. Place a washer and nut onto set screw and tighten securely.

