

# Wall Plate DigitalMedia™ CAT Transmitter 200

- > DigitalMedia™ CAT transmitter and multimedia interface
- > Built-in 2x1 AV switcher with auto-switching and analog audio-breakaway
- > QuickSwitch HD® technology achieves fast, reliable switching
- > DM® CAT output supports up to 450 ft (137 m) cable length<sup>[2]</sup>
- > Provides HDMI® and RGB/component video inputs<sup>[4]</sup>
- > Also supports DVI and DisplayPort Multimode sources<sup>[3]</sup>
- > Handles HD video with HDCP
- > Handles Dolby Digital®, DTS®, and uncompressed 7.1 linear PCM audio
- > Includes mini-TRS stereo analog audio input
- > Detects and reports detailed video and audio input information
- > Performs automatic AV signal format management via EDID
- > Includes USB HID keyboard/mouse port
- > Enables device control via CEC
- > Allows quick, easy setup and diagnostics
- > 2-gang wall box mount design
- > Also fits in a typical 6" deep floor box
- > Available in black or white finish
- > Powered over the DMNet® connection

The DM-TX-200-2G is a DM® CAT transmitter and switcher that installs in a double-gang electrical box to provide a convenient interface for computers and high-definition AV sources as part of a complete Crestron® DigitalMedia™ system. The DM-TX-200-2G is ideal for wall, lectern, and floor box applications in a boardroom, classroom, auditorium, or residence. It connects to the head end or display location using a single Crestron DM cable, providing HDMI®, VGA, and analog audio inputs, plus a USB HID host port. Standard gang-box mounting allows for installation adjacent to an Ethernet jack (Crestron [MP-WP183](#) or equivalent) for a total connectivity solution<sup>[1]</sup>.

## DigitalMedia™

As the leader in HDMI and control system technologies, Crestron developed DigitalMedia (DM) to deliver the first complete HD AV distribution system to take HDMI to a higher level. DigitalMedia allows virtually any mix of HDMI and other AV sources to be distributed throughout a home, office, school, or virtually any other facility. DigitalMedia CAT distributes uncompressed digital video and audio signals up to 450 feet (137 m) using Crestron DM cable<sup>[2]</sup>.

### Multimedia Computer/AV Interface

The DM-TX-200-2G provides simple switching between two inputs. The inputs can be configured to switch automatically or be selected through a Crestron control system. Inputs include:

- **HDMI** — Supports HD 1080p60 video and WUXGA computer signals with HDCP and multi-channel lossless audio. Also handles DVI and DisplayPort Multimode signals using an appropriate adapter or interface cable<sup>[3]</sup>.
- **PC** — This VGA type input handles analog RGB signals up to WUXGA



Faceplates not included.

1920x1200 pixels, as well as analog video up to 1080p60<sup>[4]</sup>. A 1/8" (3.5mm) stereo audio input is included to accommodate analog audio signals from an unbalanced line-level source or headphone output.

Note: Audio breakaway capability enables the analog audio input to be used with either video input.

A single DM CAT output is provided for connection to a DM switcher or receiver.<sup>[2]</sup> Used with a single DM CAT Receiver/Room Controller and optional Crestron Control System, the DM-TX-200-2G affords a simple solution for extending a multimedia computer or AV signal to a single display up to 450 feet (137 m) away<sup>[2]</sup>. As part of a larger system using a DM-MD series switcher, multiple DM-TX-200-2Gs may be installed to enable the distribution of several sources at different locations to feed multiple displays throughout any room or larger facility.


### Keyboard/Mouse Extender

The DM-TX-200-2G functions as a keyboard/mouse extender, allowing a USB HID-compliant keyboard and/or mouse to be connected at the wall plate and used to control a computer or other component located at the central equipment rack or some other location.

### EDID Format Management

The DM-TX-200-2G allows for management of the EDID (Extended Display Identification Data) information that passes between the display devices and input sources in the system. Using [Crestron Toolbox™](#) software, the format and resolution capabilities of each device can be assessed and managed through the DM-TX-200-2G, ensuring reliable operation by instructing sources to output only the resolutions and formats that can be handled by the displays and system wiring.

# DM-TX-200-2G Wall Plate DigitalMedia™ CAT Transmitter 200

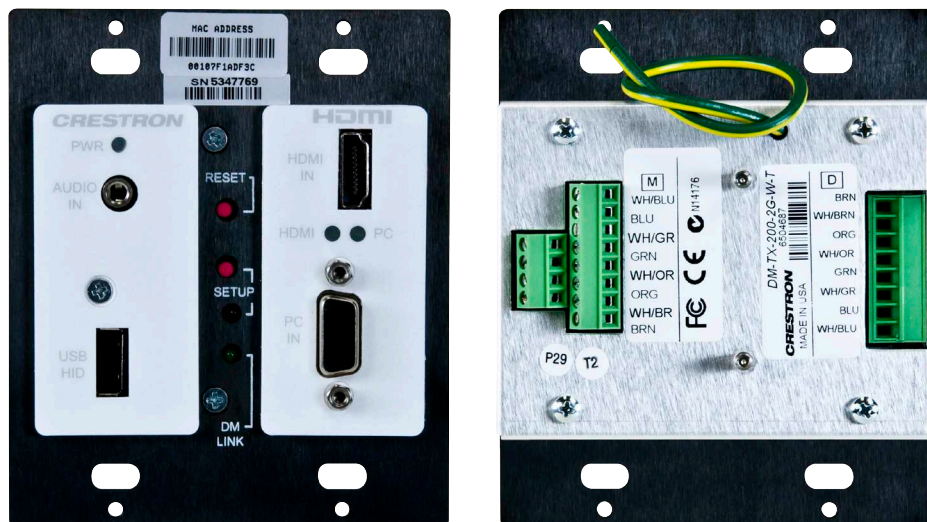

DM-TX-200-2G-W-T – Front and Rear Views

## CEC Embedded Device Control

The primary objective of every Crestron system is to enable precisely the control desired for a seamless user experience. DigitalMedia provides an alternative to conventional IR and RS-232 device control by harnessing the CEC (Consumer Electronics Control) signal embedded in HDMI. Through its connection to the control system, the DM-TX-200-2G provides a gateway for controlling the connected source device right through the HDMI connection, potentially eliminating the need for any dedicated control wires or IR emitters. Through proper CEC signal management, DigitalMedia allows you to take control of each device in the system as you like.

## Simple Wall Box Mounting

The DM-TX-200-2G is designed to be installed using a 2-gang electrical box or plaster ring. It also fits a 2-gang opening in a typical 6” deep floor box. The DM cable is terminated to the rear of the transmitter using screw terminals. The unit is powered via the DMNet® connection. An array of indicators on the front of the DM-TX-200-2G provides for easy setup and troubleshooting. Advanced configuration is enabled through Crestron Toolbox software.

Please refer to the DigitalMedia Resources Webpage at <http://www.crestron.com/dmresources/> for additional design tools and reference documents.

## SPECIFICATIONS

### Video

**Switcher:** 2x1 combination digital/analog switch, Crestron QuickSwitch HD®

**Input Signal Type:** HDMI®, DVI<sup>[3]</sup>, DisplayPort Multimode<sup>[3]</sup>, RGB, component (YPbPr)<sup>[4]</sup>, S-Video (Y/C)<sup>[4]</sup>, composite<sup>[4]</sup>

**Output Signal Type:** DM® CAT (DigitalMedia™ over twisted-pair copper wire)

**Formats:** HDMI, DVI, HDCP content protection support, computer up to UXGA/WUXGA, HD up to 1080p60, NTSC or PAL

**Input Resolutions, HDMI & DVI, Progressive:** 640x480@60Hz, 720x480@60Hz (480p), 720x576@50Hz (576p), 800x600@60Hz, 848x480@60Hz, 852x480@60Hz, 854x480@60Hz, 1024x768@60Hz, 1024x852@60Hz, 1024x1024@60Hz, 1280x720@50Hz (720p50), 1280x720@60Hz (720p60), 1280x768@60Hz, 1280x800@60Hz, 1280x960@60Hz, 1280x1024@60Hz, 1360x768@60Hz, 1365x1024@60Hz, 1366x768@60Hz, 1400x1050@60Hz, 1440x900@60Hz, 1600x900@60Hz, 1600x1200@60Hz, 1680x1050@60Hz, 1920x1080@24Hz (1080p24), 1920x1080@25Hz (1080p25), 1920x1080@50Hz (1080p50), 1920x1080@60Hz (1080p60), 1920x1200@60Hz, 2048x1080@24Hz, 2048x1152@60Hz, plus any other resolution allowed by HDMI up to 165MHz pixel clock

**Input Resolutions, HDMI & DVI, Interlaced:** 720x480@30Hz (480i), 720x576@25Hz (576i), 1920x1080@25Hz (1080i25), 1920x1080@30Hz (1080i30), plus any other resolution allowed by HDMI up to 165MHz pixel clock

**Input Resolutions, RGB:** 640x480@60Hz, 720x480@60Hz (480p), 720x576@50Hz (576p), 800x600@60Hz, 848x480@60Hz, 1024x768@60Hz, 1280x720@50Hz (720p50), 1280x720@60Hz (720p60), 1280x768@60Hz, 1280x800@60Hz, 1280x960@60Hz, 1280x1024@60Hz, 1360x768@60Hz, 1366x768@60Hz, 1400x1050@60Hz, 1440x900@60Hz, 1600x1200@60Hz, 1680x1050@60Hz, 1920x1080@50Hz (1080p50), 1920x1080@60Hz (1080p60), 1920x1200@60Hz, 2048x1152@60Hz

**Input Resolutions, Component<sup>[4]</sup>:** 480i, 576i, 480p, 576p, 720p50, 720p60, 1080p24, 1080i25 (1125 lines), 1080i30, 1080p30, 1080p50 (1125 lines), 1080p60

**Input Resolutions, Composite and S-Video<sup>[4]</sup>:** 480i, 576i

**Output Resolutions:** Matched to inputs

**Analog-To-Digital Conversion:** 10-bit 165 MHz per each of 3 channels

### Audio

**Switcher:** 2x1 combination digital/analog switch

**Input Signal Types:** HDMI, DisplayPort Multimode<sup>[3]</sup>, analog stereo

**Output Signal Type:** DM CAT

# DM-TX-200-2G Wall Plate DigitalMedia™ CAT Transmitter 200

**Formats, HDMI:** Dolby Digital®, Dolby Digital EX, DTS®, DTS-ES, DTS 96/24, Up to 8ch PCM

**Formats, Analog:** Stereo 2-channel

**Analog-To-Digital Conversion:** 24-bit 48 kHz

**Performance (analog):** Frequency Response: 20Hz to 20kHz  $\pm 0.75$ dB;  
S/N Ratio: >90dB, 20Hz to 20kHz A-weighted;  
THD+N: <0.05% @ 1kHz;  
Stereo Separation: >90dB

## Communications

---

**DigitalMedia:** DM CAT, DMNet®, HDCP management, EDID format management, CEC

**USB:** Supports USB HID class devices

## Connectors – Front

---

**AUDIO IN:** (1) 3.5mm TRS mini phone jack;  
Unbalanced stereo line-level audio input;  
Input Level: 2 Vrms maximum;  
Input Impedance: 10k Ohms

**USB HID:** (1) USB Type A female; USB 2.0 host port for connection of a mouse/keyboard or other USB HID-compliant device

**HDMI IN:** (1) 19-pin Type A HDMI female;  
HDMI digital video/audio input;  
Also supports DVI and DisplayPort Multimode<sup>[3]</sup>

**PC IN:** (1) DB15HD female;  
RGB (VGA), component, S-Video, or composite video input<sup>[4]</sup>;  
Formats: RGBHV, RGBS, RGsB, YPbPr, Y/C, NTSC, PAL;  
Input Levels: 0.5 to 1.5 Vp-p with built-in DC restoration;  
Input Impedance: 75 Ohms;  
Sync Input Type: Autodetect RGBHV, RGBS, RGsB, YPbPr;  
Sync Input Level: 3 to 5 Vp-p;  
Sync Input Impedance: 1k Ohms

## Connectors – Rear

---

**D, M:** (1) DM CAT output composed of (16) captive screw terminals with (2) grounded strain reliefs;  
Connects to DM CAT input of a DM switcher, receiver/room controller, or other DM device via DM-CBL cable<sup>[2]</sup>

**G B A 24:** (1) DMNet port composed of (4) captive screw terminals;  
Connects to DMNet port of a DM switcher, receiver/room controller, or other DM device via DM-CBL cable<sup>[2]</sup>

**G:** (1) Flying lead, chassis ground connection

## DM Cable Length

---

**Maximum length without, between, before, or after repeaters:**

200 ft (60 m) for 720p, 1080i, 1080p24  
200 ft (60 m) for 1024x768 @75Hz  
150 ft (45 m) for 1080p60  
150 ft (45 m) for 1280x1024 @75Hz

150 ft (45 m) for 1920x1200 @60Hz

125 ft (38 m) for 1600x1200 @60Hz

**Maximum total length using up to 2 repeaters:**

450 ft (137 m) for 720p, 1080i, 1080p24

450 ft (137 m) for 1024x768 @75Hz

450 ft (137 m) for 1080p60

450 ft (137 m) for 1280x1024 @75Hz

450 ft (137 m) for 1920x1200 @60Hz

375 ft (114 m) for 1600x1200 @60Hz

## Controls & Indicators

---

**PWR:** (1) green LED, indicates operating power supplied via DMNet

**RESET:** (1) miniature recessed pushbutton for hardware reset

**SETUP:** (1) red LED and (1) miniature recessed pushbutton for Ethernet setup

**DM LINK:** (1) green LED, indicates DM link status

**HDMI:** (1) green LED, indicates HDMI input is selected

**PC:** (1) green LED, indicates PC input is selected

## Power Requirements

---

**DMNet Power Usage:** 10 Watts (0.42 Amps @ 24 Volts DC)

## Environmental

---

**Temperature:** 32° to 104°F (0° to 40°C)

**Humidity:** 10% to 90% RH (non-condensing)

**Heat Dissipation:** 35 BTU/Hr

## Enclosure

---

**Construction:** Metal

**Flush Mount:** Mounts in a 2-gang electrical box or in a 2-gang opening in a typical 6 inch deep floor box, 2.75 inch minimum mounting depth required, decorator style faceplate not included

## Dimensions

---

**Height:** 4.12 in (105 mm)

**Width:** 3.50 in (89 mm)

**Depth:** 2.53 in (64 mm)

## Weight

---

10.1 oz (285 g)

## MODELS & ACCESSORIES

### Available Models

---

**DM-TX-200-2G:** Wall Plate DigitalMedia™ CAT Transmitter 200, Black Textured

**DM-TX-200-2G-W-T:** Wall Plate DigitalMedia™ CAT Transmitter 200, White Textured

# DM-TX-200-2G Wall Plate DigitalMedia™ CAT Transmitter 200

## Available Accessories

**DM-CBL-NP:** DigitalMedia™ Cable, non-plenum

**DM-CBL-P:** DigitalMedia™ Cable, plenum-rated

**DM-DR:** DigitalMedia™ CAT Repeater

**CBL Series:** Crestron® Certified Interface Cables

**MP-WP183:** Media Presentation Wall Plate - Ethernet

### Notes:

1. The DM-TX-200-2G does not include an external Ethernet port. Local Ethernet connectivity for external devices requires a **MP-WP183** or equivalent Ethernet jack with a dedicated LAN connection.
2. For DigitalMedia CAT wiring, use **DM-CBL** DigitalMedia Cable. Up to two DM CAT Repeaters (Model **DM-DR**) may be required. Connection to a **DM-RX1-1G** receiver is only supported through a DM switcher. Refer to the **Crestron DigitalMedia Design Guide, Doc. #4546** for complete system design guidelines. All wire and cables sold separately.
3. HDMI requires an appropriate adapter or interface cable to accommodate a DVI or DisplayPort Multimode signal. **CBL-HD-DVI** interface cables available separately.
4. The RGB input can actually accept component, composite, and S-Video signals via direct interface to Crestron MPS Series products, or through an appropriate adapter (not included). However, input sync detection is not provided for composite or S-Video signal types through the RGB connection.

This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at [www.crestron.com/salesreps](http://www.crestron.com/salesreps) or by calling 800-237-2041.

Specifications subject to change without notice. Crestron is not responsible for errors in typography or photography.

The specific patents that cover Crestron products are listed online at: [patents.crestron.com](http://patents.crestron.com).

Crestron, Crestron Toolbox, DigitalMedia, DM, DMNet, QuickSwitch HD, and the Crestron logo are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Dolby and Dolby Digital are either trademarks or registered trademarks of Dolby Laboratories in the United States and/or other countries. DTS is either a trademark or registered trademark of DTS, Inc. in the United States and/or other countries. HDMI and the HDMI Logo are either trademarks or registered trademarks of HDMI Licensing LLC in the United States and/or other countries. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. ©2012 Crestron Electronics, Inc.

