


type MRKZ

15 ... 300 VA

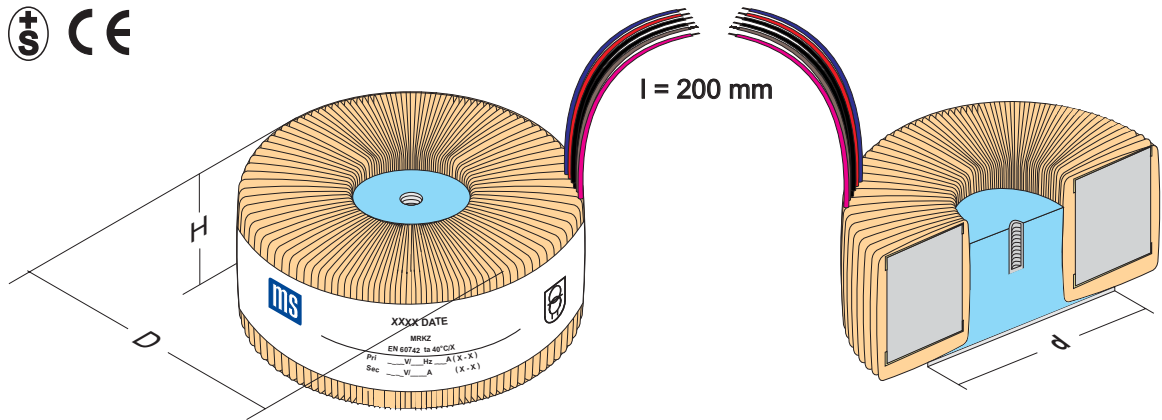

MRKZ	order-nr	nominal power [VA]	nominal voltage [V]	nominal recom. current [A]	nominal recom. sec-fuse [A]	D [mm]	H [mm]	thread plate d
	MRKZ 15 - 2 x 6	15	2 x 6	1,25	1,25	68	32	M 4 d = 50
MRKZ 15 - 2 x 12	15	2 x 12	0,63	0,63				
MRKZ 15 - 2 x 15	15	2 x 15	0,50	0,50				
MRKZ 15 - 2 x 18	15	2 x 18	0,42	0,50				
MRKZ 30 - 2 x 6	30	2 x 6	2,50	2,50	77	35	M 4 d = 50	
MRKZ 30 - 2 x 12	30	2 x 12	1,25	1,25				
MRKZ 30 - 2 x 15	30	2 x 15	1,00	1,00				
MRKZ 30 - 2 x 18	30	2 x 18	0,83	1,00				
MRKZ 50 - 2 x 6	50	2 x 6	4,17	5,00	81	42	M 5 d = 70	
MRKZ 50 - 2 x 9	50	2 x 9	2,78	3,15				
MRKZ 50 - 2 x 12	50	2 x 12	2,08	2,50				
MRKZ 50 - 2 x 15	50	2 x 15	1,67	2,00				
MRKZ 50 - 2 x 18	50	2 x 18	1,39	1,60				
MRKZ 80 - 2 x 6	80	2 x 6	6,67	8,00	90	42	M 5 d = 70	
MRKZ 80 - 2 x 9	80	2 x 9	4,44	5,00				
MRKZ 80 - 2 x 12	80	2 x 12	3,33	4,00				
MRKZ 80 - 2 x 15	80	2 x 15	2,67	3,15				
MRKZ 80 - 2 x 18	80	2 x 18	2,22	2,50				
MRKZ 120 - 2 x 12	120	2 x 12	5,00	5,00	98	49	M 5 d = 70	
MRKZ 120 - 2 x 15	120	2 x 15	4,00	4,00				
MRKZ 120 - 2 x 18	120	2 x 18	3,33	4,00				
MRKZ 120 - 2 x 22	120	2 x 22	2,73	3,15				
MRKZ 160 - 2 x 12	160	2 x 12	6,67	8,00	114	49	M 6 d = 85	
MRKZ 160 - 2 x 15	160	2 x 15	5,33	6,30				
MRKZ 160 - 2 x 18	160	2 x 18	4,44	5,00				
MRKZ 160 - 2 x 22	160	2 x 22	3,64	4,00				
MRKZ 230 - 2 x 12	230	2 x 12	9,58	10,00	118	56	M 6 d = 85	
MRKZ 230 - 2 x 15	230	2 x 15	7,67	8,00				
MRKZ 230 - 2 x 18	230	2 x 18	6,39	8,00				
MRKZ 300 - 2 x 12	300	2 x 12	12,50	12,50	120	65	M 6 d = 85	
MRKZ 300 - 2 x 22	300	2 x 22	6,82	8,00				

General on the type size MRKZ

- * safety transformer according EN 60742, EN 61558-2-6 and SEV 1113
- * primary voltage 230 V \pm 10% / 50-60 Hz
- * secondary voltage see list
- * special types on demand
- * primary outputs with free wires
- * secondary outputs with magnet wire and sleeving, about 10 mm tinned
- * all leads about 200 mm long, all outputs on the same place
- * temperature switch (125°C) in the primary winding
- * test voltage 4 kV pri - sec
- * construction with UL-approved material
- * powerless mounting with a screw through the potted transformer