

Features

- Low forward voltage drop
- High reverse voltage
- Hermetic metal cases with ceramic insulators

Typical Applications

- All purpose high power rectifier diodes
- High power resistance welding equipment
- Non-controllable and half-controllable rectifiers
- Controlled rectifiers

| | |
|-------------|------------------------------------|
| $I_{F(AV)}$ | 2910A |
| V_{RRM} | 200~1000 V |
| I_{FSM} | 31 kA |
| I^2t | 4805 $10^3 A^2S$ |



| SYMBOL | CHARACTERISTIC | TEST CONDITIONS | $T_j(^{\circ}C)$ | VALUE | | | UNIT |
|---------------|---|---|------------------|-------|------|-------|-------------------|
| | | | | Min | Type | Max | |
| $I_{F(AV)}$ | Mean forward current | 180° half sine wave 50Hz Double side cooled, | 190 | | | 3410 | A |
| | | | | | | 2910 | |
| V_{RRM} | Repetitive peak reverse voltage | V_{RRM} tp=10ms $V_{RSM} = V_{RRM} + 100V$ | 190 | 200 | | 1000 | V |
| I_{RRM} | Repetitive peak current | $V_{RM} = V_{RRM}$ | 190 | | | 80 | mA |
| I_{FSM} | Surge forward current | 10ms half sine wave $V_R = 0.6V_{RRM}$ | 190 | | | 31 | kA |
| I^2t | I^2t for fusing coordination | | | | | 4805 | $A^2s \cdot 10^3$ |
| V_{FO} | Threshold voltage | | 190 | | | 0.80 | V |
| r_F | Forward slop resistance | | | | | 0.14 | m Ω |
| V_{FM} | Peak on-state voltage | $I_{FM} = 2000A, F = 24kN$ | 190 | | | 1.08 | V |
| Q_{rr} | Recovery charge | $I_{FM} = 2000A, tp = 2000\mu s, di/dt = -20A/\mu s, V_R = 50V$ | 190 | | 3300 | | μC |
| $R_{th(j-c)}$ | Thermal resistance Junction to case | At 180° sine double side cooled Clamping force 24.0kN | | | | 0.020 | $^{\circ}C/W$ |
| $R_{th(c-h)}$ | Thermal resistance case to heat sink | | | | | 0.005 | |
| F_m | Mounting force | | | 19 | | 26 | kN |
| T_{stg} | Stored temperature | | | -40 | | 190 | $^{\circ}C$ |
| W_t | Weight | | | | 440 | | g |
| Outline | ZT50cT | | | | | | |

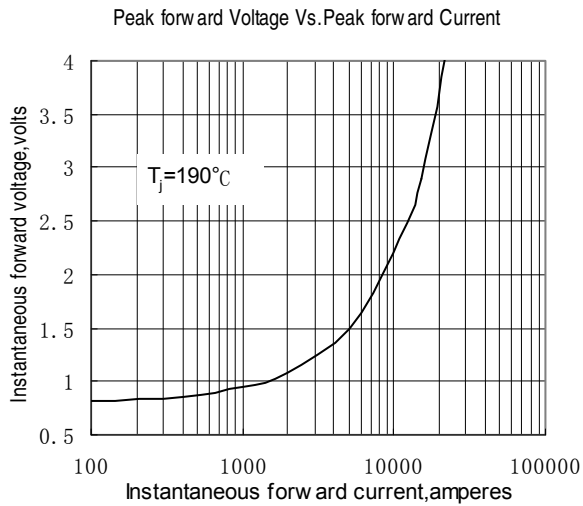


Fig.1

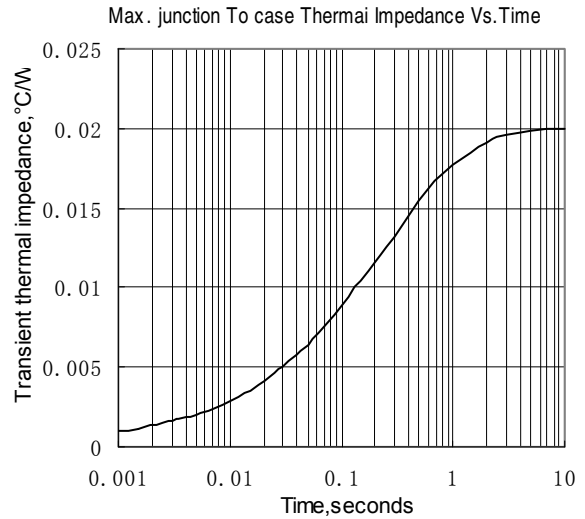


Fig.2

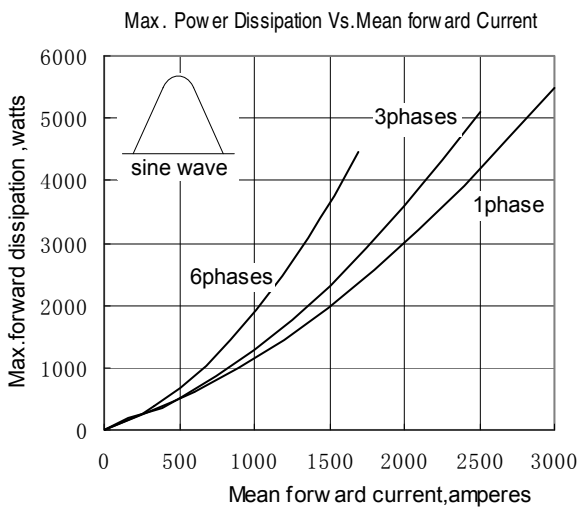


Fig.3

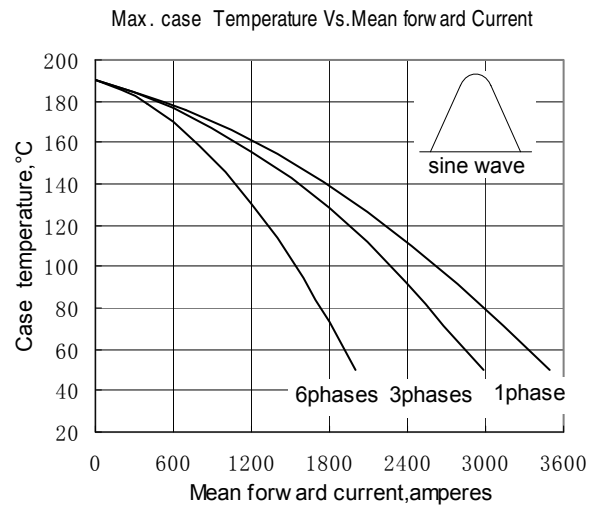


Fig.4

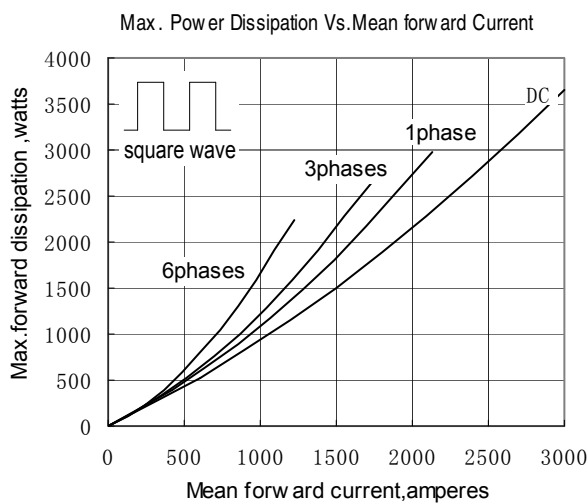


Fig.5

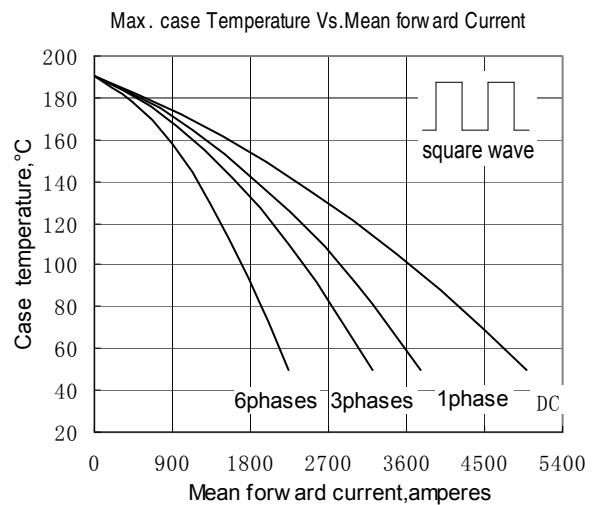


Fig.6

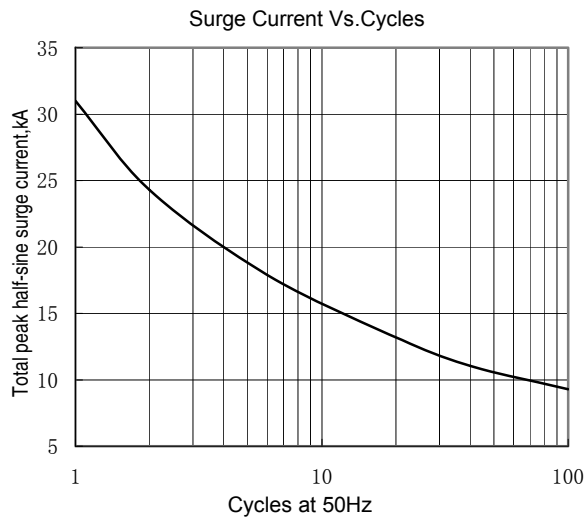


Fig.7

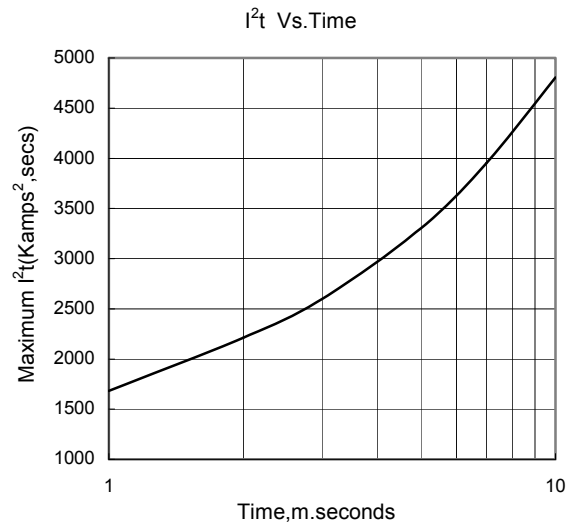


Fig.8

Outline:

