


DATASHEET 1310-9612

Operating Modes Setting

Current:	Voltage:	Resistance:	Power:
0 ... 150 A	0 ... 40 V	0.013 Ω ... 8.89 Ω	0 ... 7200 W
0 ... 450 A	0 ... 120 V	4.4 m Ω ... 2.96 Ω	0 ... 21600 W

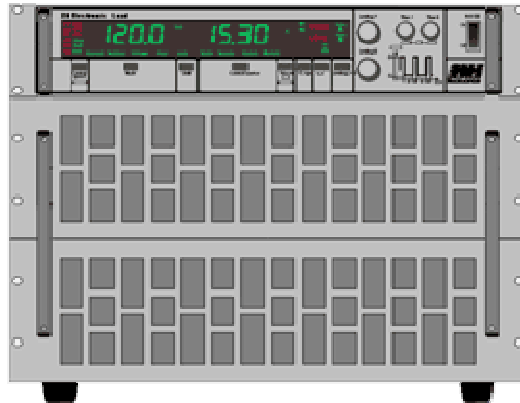

Accuracy of the Manual Setting, without Presetting:

	of setting	of corresponding range
Voltage	$\pm 0.2\%$	$\pm 0.05\%$
Current	$\pm 0.2\%$	$\pm 0.05\%$

Accuracy of Manual Setting with Presetting:

	of setting	of corresponding range
Voltage	$\pm 0.6\%$	$\pm 0.05\%$
Current	$\pm 0.6\%$	$\pm 0.05\%$
Resistance	$\pm 1.4\%$	$\pm 0.3\%$ of current range
Power	$\pm 1.4\%$	$\pm 0.5\%$
Current Limitation	$\pm 1.4\%$	$\pm 0.3\%$
Trigger Voltage	$\pm 1.4\%$	$\pm 0.3\%$
Time Setting	$\pm 1.4\%$	$\pm 0.5\%$ of B1 or B2
Time ranges for internal modulator		
	B1	100ms
	B2	1000ms

Accuracy of Display:

	of measured value (real value)	of corresponding range
Voltage	$\pm 0.2\%$	$\pm 0.05\%$
Current	$\pm 0.2\%$	$\pm 0.05\%$

Accuracy of Analog Programming:

HEIDEN power GmbH
Am Wiesengrund
86932 Pürgen
Germany

Tel.: +49-8196-9988-0
Fax.: +49-8196-9988-77
Email: info@heidenpower.com
www.heidenpower.com

0 ... 5V / 0 ... 10V for Current, Voltage, Power

	of setting	of corresponding range
Voltage	±0.2%	±0.1%
Current	±0.2%	±0.1%
Power	±2%	±0.5%
Current Limitation *	±1%	±0.4%
Trigger Voltage *	±1%	±0.4%

* only when option ZS08 is installed
 Input impedance of the analog inputs: > 10kΩ
 GND max. ±2V against negative load input ¹⁾

Accuracy of Analog Monitor Outputs: 0 ... 10V for Current, Voltage, Power ²⁾

	of the analog signal of the real value	offset voltage
Voltage	±0.2%	±15mV
Current	±0.2%	±15mV
Power	±2%	±30mV

GND max. ±2V against negative load input ¹⁾
 Loading capacity minimum 2kΩ

Accuracy of Setting Programming via Data Interface:

	of setting	of corresponding range
Voltage	±0.2%	±0.05%
Current	±0.2%	±0.05%
Resistance	±1%	±3% of current range
Power	±1%	±0.5%
Current Limitation	±1%	±0.3%
Trigger Voltage	±1%	±0.3%
Resolution Setting	16 bit	

Accuracy of Measurement, Reading via Data Interface:

	of measured value (real value)	of corresponding range
Voltage	±0.1%	±0.05%
Current	±0.2%	±0.05%
Resolution Measurement	18 bit	
Reading Rate	330ms not triggerable	

Accuracy of Measurement, Reading via Data Interface: Option ZS13

	of measured value (real value)	of corresponding range
Voltage	±0.2%	±0.05%
Current	±0.2%	±0.05%
Resolution Measurement	13 bit	
Reading Rate	min. 200µs (into memory) triggerable	

Power

Nominal Power


Derating

Overload

up to $T_A = 21\text{ °C}$

-1.2% / °C for $T_A > 21\text{ °C}$

2160 W



The height of the possible overload P_{max} depends on the temperature of the device and therefore on the dissipated power previously



The possible overload duration t depends on the height of the overload power P_x

Input Impedance

> 50 kΩ at deactivated load input

Input Capacitance

approx. 2μF / 1000W

Operating Temperature

5°C ... 40°C

External Control

- Load Switching
- Trigger input and output
- Range switching
- Mode switching
- Emergency shutdown

Protection Equipment

- Current and power limitation
- Over-voltage protection up to 110% of rated voltage ³⁾
- Protection against reverse polarity up to rated current (diode) ⁴⁾
- Over-temperature deactivation
- Transient protection

Minimum voltage



Full current up from approx. 1V.
Below 1V linear Derating.

Modulator



Puls t1: 100µs ... 1s
 Puls t2: 100µs ... 1s
 (in two ranges)
 Load level: each 0 ...
 100%

Rise and Fall Time ⁶⁾

100 µs

Parallel Operation

up to 3 devices in
 master-slave operation
 (hardware-controlled)

Cooling

infinitely variable
 controlled fans

Noise max. ⁷⁾

74 dB(A)

Case ⁸⁾, Weight

19" / 8 HU, 61 kg

Mains Supply

115/230V ± 10%, 50 ...
 60Hz

Power Consumption

380 VA

Permissible Operating Voltages: Negative Load Input - Case

Standard	125V AC
with Option ZS06	500V AC ⁵⁾

Colour

Front Panel	RAL7032 (pebble grey)
Sides, Lid	RAL7037 (stone grey)

Electric Safety

DIN EN 61010-1

EMC, CE-Mark

DIN EN 61326-1
 DIN EN 61000-3-2
 DIN EN 61000-3-3

1) 500 V with option ZS06 (except a Zero-Volt-Option is installed)

2) for units with 3 and 4 setting ranges the power monitoring signal is referred to the highest range

3) 101% for 800V devices

4) no protection against reverse polarity at installed Zero-Volt-Option

5) except a Zero-Volt-Option is installed

6) Rise and fall times are defined as 10%...90% and 90%...10% of the maximum current (measured in constant current mode - FAST)

7) measured at the front panel at 1m distance

8) 1HU = 44.45mm