


**DATASHEET 1310-14060 14 kW / 600 V / 200 A**

**Operating Modes Setting**

Current:	Voltage:	Resistance:	Power:
<b>0 ... 67 A</b>	<b>0 ... 200 V</b>	<b>0.03 Ω ... 100 Ω</b>	<b>0 ... 4667 W</b>
<b>0 ... 200 A</b>	<b>0 ... 600 V</b>	<b>0.01 Ω ... 33.3 Ω</b>	<b>0 ... 14000 W</b>

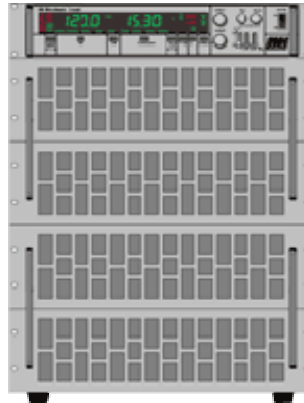

**Accuracy of the Manual Setting, without Presetting:**

	of setting	of corresponding range
Voltage	<b>±0.2%</b>	<b>±0.05%</b>
Current	<b>±0.2%</b>	<b>±0.05%</b>

**Accuracy of Manual Setting with Presetting:**

	of setting	of corresponding range
Voltage	<b>±0.6%</b>	<b>±0.05%</b>
Current	<b>±0.6%</b>	<b>±0.05%</b>
Resistance	<b>±1.4%</b>	<b>±0.3%</b> of current range
Power	<b>±1.4%</b>	<b>±0.5%</b>
Current Limitation	<b>±1.4%</b>	<b>±0.3%</b>
Trigger Voltage	<b>±1.4%</b>	<b>±0.3%</b>
Time Setting	<b>±1.4%</b>	<b>±0.5%</b> of B1 or B2
Time ranges for internal modulator		
	B1	<b>100ms</b>
	B2	<b>1000ms</b>

**Accuracy of Display:**

	of measured value (real value)	of corresponding range
Voltage	<b>±0.2%</b>	<b>±0.05%</b>
Current	<b>±0.2%</b>	<b>±0.05%</b>

**Accuracy of Analog Programming:  
0 ... 5V / 0 ... 10V for Current, Voltage, Power**

	of setting	of corresponding range
Voltage	<b>±0.2%</b>	<b>±0.1%</b>
Current	<b>±0.2%</b>	<b>±0.1%</b>
Power	<b>±2%</b>	<b>±0.5%</b>
Current Limitation *	<b>±1%</b>	<b>±0.4%</b>
Trigger Voltage *	<b>±1%</b>	<b>±0.4%</b>

\* only when option ZS08 is installed  
 Input impedance of the analog inputs: > 10kΩ  
 GND max. ±2V against negative load input <sup>1)</sup>

### Accuracy of Analog Monitor Outputs: 0 ... 10V for Current, Voltage, Power <sup>2)</sup>

	of the analog signal of the real value	offset voltage
Voltage	<b>±0.2%</b>	<b>±15mV</b>
Current	<b>±0.2%</b>	<b>±15mV</b>
Power	<b>±2%</b>	<b>±30mV</b>

GND max. ±2V against negative load input <sup>1)</sup>  
 Loading capacity minimum 2kΩ

### Accuracy of Setting Programming via Data Interface:

	of setting	of corresponding range
Voltage	<b>±0.2%</b>	<b>±0.05%</b>
Current	<b>±0.2%</b>	<b>±0.05%</b>
Resistance	<b>±1%</b>	<b>±3%</b> of current range
Power	<b>±1%</b>	<b>±0.5%</b>
Current Limitation	<b>±1%</b>	<b>±0.3%</b>
Trigger Voltage	<b>±1%</b>	<b>±0.3%</b>
Resolution Setting	<b>16 bit</b>	

### Accuracy of Measurement, Reading via Data Interface:

	of measured value (real value)	of corresponding range
Voltage	<b>±0.1%</b>	<b>±0.05%</b>
Current	<b>±0.2%</b>	<b>±0.05%</b>
Resolution Measurement	<b>18 bit</b>	
Reading Rate	<b>330ms</b> not triggerable	

### Accuracy of Measurement, Reading via Data Interface: Option ZS13

	of measured value (real value)	of corresponding range
Voltage	<b>±0.2%</b>	<b>±0.05%</b>
Current	<b>±0.2%</b>	<b>±0.05%</b>
Resolution Measurement	<b>13 bit</b>	
Reading Rate	<b>min. 200µs</b> (into memory) triggerable	

## Power

Nominal Power	up to $T_A = 21\text{ °C}$
Derating	-1.2% / °C for $T_A > 21\text{ °C}$
Overload	W

The height of the possible overload  $P_{max}$  depends on the temperature of the device and therefore on the dissipated power previously

The possible overload duration  $t$  depends on the height of the overload power  $P_x$

**Input Impedance** > 50 kΩ at deactivated load input

**Input Capacitance** approx. 2μF / 1000W

**Operating Temperature** 5°C ... 40°C


## External Control

- Load Switching
- Trigger input and output
- Range switching
- Mode switching
- Emergency shutdown

## Protection Equipment


- Current and power limitation
- Over-voltage protection up to 110% of rated voltage <sup>3)</sup>
- Protection against reverse polarity up to rated current (diode) <sup>4)</sup>
- Over-temperature deactivation
- Transient protection

## Minimum voltage



Full current up from approx. 1V.  
Below 1V linear Derating.

## Modulator



Puls  $t_1$ : 100μs ... 1s

	Puls t2: 100µs ... 1s (in two ranges) Load level: each 0 ... 100%
<b>Rise and Fall Time</b> <sup>6)</sup>	<b>60 µs</b>
<b>Parallel Operation</b>	up to 3 devices in master-slave operation (hardware-controlled)
<b>Cooling</b>	infinitely variable controlled fans
<b>Noise max.</b> <sup>7)</sup>	<b>77 dB(A)</b>
<b>Case</b> <sup>8)</sup> , <b>Weight</b>	<b>19" / 14 HU, 91 kg</b>
<b>Mains Supply</b>	115/230V ± 10%, 50 ... 60Hz
<b>Power Consumption</b>	<b>640 VA</b>
<b>Permissible Operating Voltages: Negative Load Input - Case</b>	
Standard	125V AC
with Option ZS06	500V AC <sup>5)</sup>
<b>Colour</b>	
Front Panel	RAL7032 (pebble grey)
Sides, Lid	RAL7037 (stone grey)
<b>Electric Safety</b>	DIN EN 61010-1
<b>EMC, CE-Mark</b>	DIN EN 61326-1 DIN EN 61000-3-2 DIN EN 61000-3-3

- 
- 1) 500 V with option ZS06 (except a Zero-Volt-Option is installed)
  - 2) for units with 3 and 4 setting ranges the power monitoring signal is referred to the highest range
  - 3) 101% for 800V devices
  - 4) no protection against reverse polarity at installed Zero-Volt-Option
  - 5) except a Zero-Volt-Option is installed
  - 6) Rise and fall times are defined as 10%...90% and 90%...10% of the maximum current (measured in constant current mode - FAST)
  - 7) measured at the front panel at 1m distance
  - 8) 1HU = 44.45mm