






### Features

- 2.0mmx1.25mm SMT LED, 1.1mm thickness.
- Low power consumption.
- Wide viewing angle.
- Ideal for backlight and indicator.
- Various colors and lens types available.
- Package : 2000pcs / reel.
- Moisture sensitivity level : level 3.
- RoHS compliant.

### Description

The Super Bright Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

### Package Dimensions

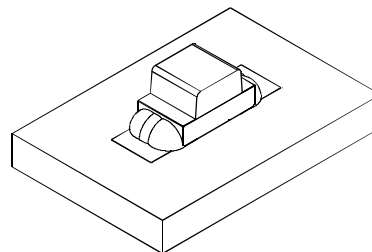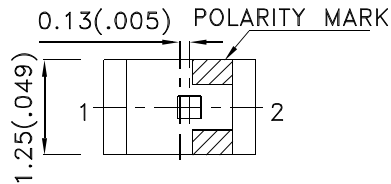

#### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.1(0.004)$  unless otherwise noted.
3. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.
4. The device has a single mounting surface. The device must be mounted according to the specifications.



## Selection Guide

| Part No.   | Dice                     | Lens Type   | Iv (mcd) [2]<br>@ 20mA |      | Viewing<br>Angle [1] |
|------------|--------------------------|-------------|------------------------|------|----------------------|
|            |                          |             | Min.                   | Typ. | 2θ1/2                |
| KP-2012SGC | Super Bright Green (GaP) | Water Clear | 8                      | 15   | 120°                 |

Notes:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.
2. Luminous intensity/ luminous Flux: +/-15%.

## Electrical / Optical Characteristics at TA=25°C

| Symbol                | Parameter                | Device             | Typ. | Max. | Units | Test Conditions           |
|-----------------------|--------------------------|--------------------|------|------|-------|---------------------------|
| $\lambda_{peak}$      | Peak Wavelength          | Super Bright Green | 565  |      | nm    | I <sub>F</sub> =20mA      |
| $\lambda_D$ [1]       | Dominant Wavelength      | Super Bright Green | 568  |      | nm    | I <sub>F</sub> =20mA      |
| $\Delta\lambda_{1/2}$ | Spectral Line Half-width | Super Bright Green | 30   |      | nm    | I <sub>F</sub> =20mA      |
| C                     | Capacitance              | Super Bright Green | 15   |      | pF    | V <sub>F</sub> =0V;f=1MHz |
| V <sub>F</sub> [2]    | Forward Voltage          | Super Bright Green | 2.2  | 2.5  | V     | I <sub>F</sub> =20mA      |
| I <sub>R</sub>        | Reverse Current          | Super Bright Green |      | 10   | uA    | V <sub>R</sub> =5V        |

Notes:


1. Wavelength: +/-1nm.
2. Forward Voltage: +/-0.1V.

## Absolute Maximum Ratings at TA=25°C






| Parameter                | Super Bright Green | Units |
|--------------------------|--------------------|-------|
| Power dissipation        | 62.5               | mW    |
| DC Forward Current       | 25                 | mA    |
| Peak Forward Current [1] | 140                | mA    |
| Reverse Voltage          | 5                  | V     |
| Operating Temperature    | -40°C To +85°C     |       |
| Storage Temperature      | -40°C To +85°C     |       |

Note:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.

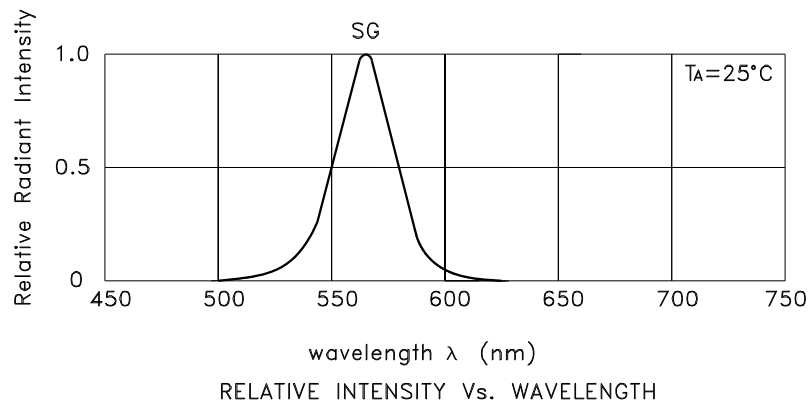


Super Bright Green KP-2012SGC

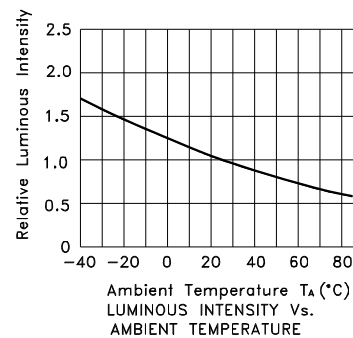

**KP-2012SGC**

**Reflow soldering is recommended and the soldering profile is shown below.  
Other soldering methods are not recommended as they might cause damage to the product.**


### Reflow Soldering Profile For Lead-free SMT Process.

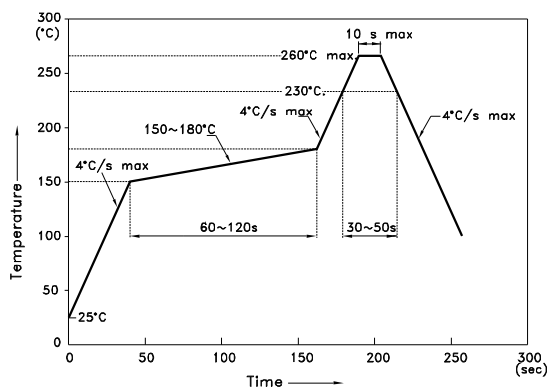


NOTES:

1. We recommend the reflow temperature 245°C(+/-5°C).The maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.


**Recommended Soldering Pattern**  
(Units : mm; Tolerance:  $\pm 0.1$ )

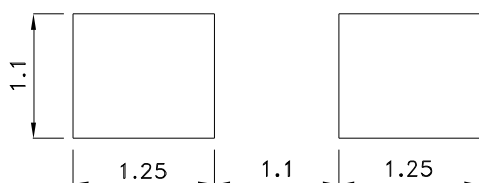

## Reel Dimension

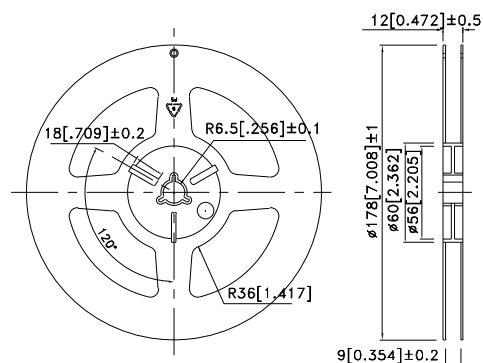


### Tape Dimensions (Units : mm)

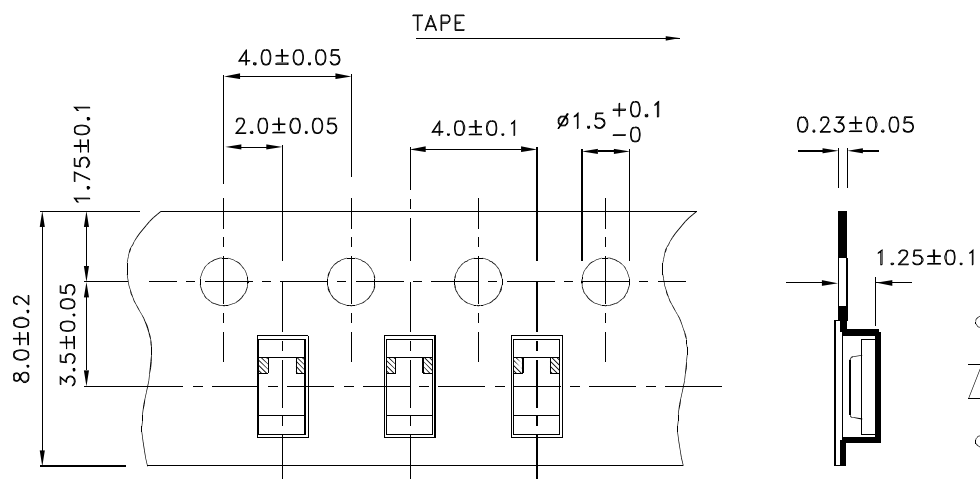

## PACKING & LABEL SPECIFICATIONS

KP-2012SGC

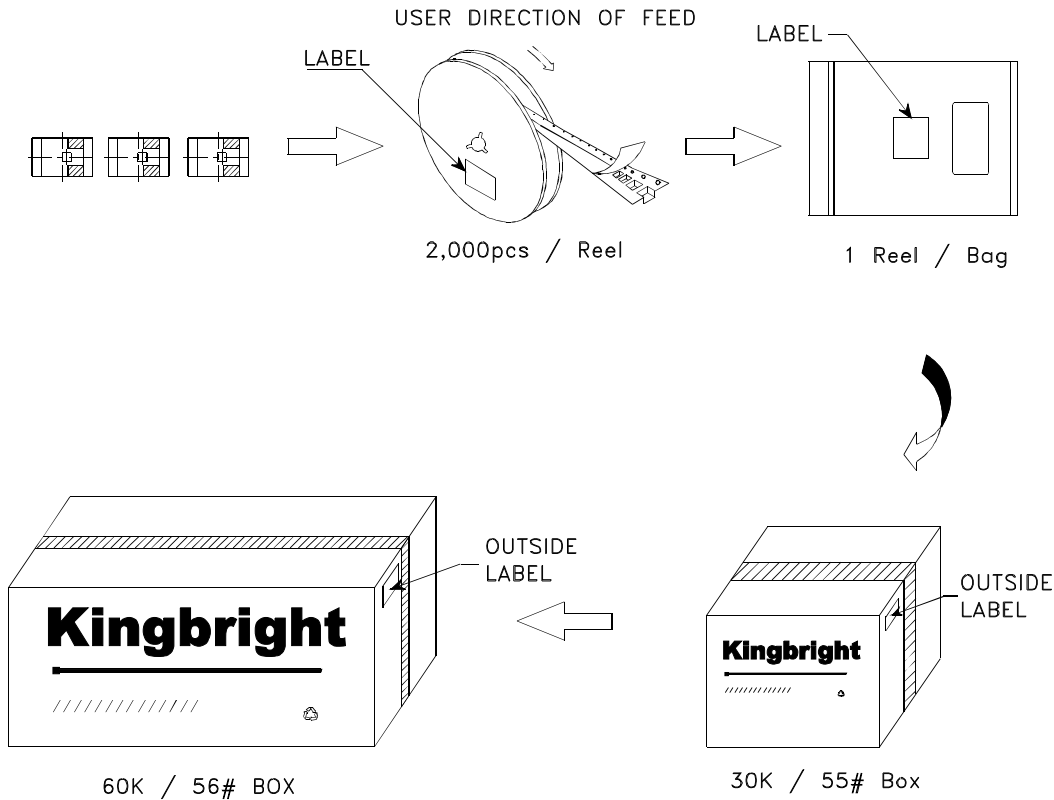

|                                                                                                                         |                                               |
|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|
| <b>Kingbright</b>                                                                                                       |                                               |
| P/N0: KP-2012xxx                                                                                                        |                                               |
| QTY: 2,000 pcs                                                                                                          | Q.C. <div>Q C<br/>XX XX XXXX<br/>PASSED</div> |
| S/N: XXXX                                                                                                               |                                               |
| CODE: XXX                                                                                                               |                                               |
| LOT NO:<br><br>XXXXXXXXXXXXXXXXXXXX |                                               |
| RoHS Compliant                                                                                                          |                                               |