



CSMS0620D Series SMD WIRE WOUND POWER INDUCTORS (SHIELDED)


Rev. A

A. Electrical Specifications:

P/N	Marking	Inductance @100KHz (μH)	Inductance Tolerance	DCR ±20%(Ω)	Rated Current (mA)		SRF Min. (MHz)
					I sat	I rms	
CSMS0620D-R80N	0R8	0.8	± 30%	0.020	6400	4100	110
CSMS0620D-1R5N	1R5	1.5	± 30%	0.026	4300	3600	93
CSMS0620D-2R2N	2R2	2.2	± 30%	0.034	3200	2900	73
CSMS0620D-3R3N	3R3	3.3	± 30%	0.040	2800	2750	55
CSMS0620D-4R7N	4R7	4.7	± 30%	0.058	2400	2150	43
CSMS0620D-6R8N	6R8	6.8	± 30%	0.085	2000	1800	30
CSMS0620D-100M	100	10	± 20%	0.125	1900	1500	18
CSMS0620D-220M	220	22	± 20%	0.290	1250	950	11

B. Dimensions: mm (Inch)

Series	a	b	c	d	e	f	g	h	i	k	m	n
CSMS0620D	6.0 (0.236)	6.0 (0.236)	2.0 (0.079)	1.35 (0.053)	2.3 (0.091)	4.0 (0.157)	4.8 (0.189)	0.3 (0.012)	1.6 (0.063)	5.2 (0.205)	5.7 (0.224)	4.7 (0.185)
Tol.	±0.2 (0.008)	±0.2 (0.008)	Max.	±0.2 (0.008)	Typ.	±0.2 (0.008)	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.

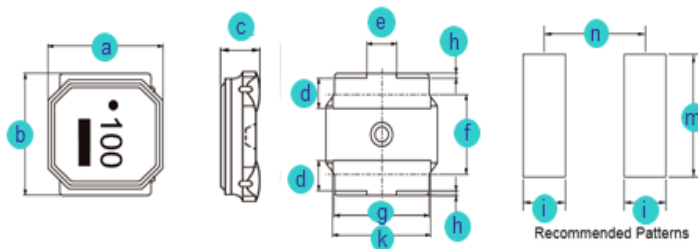

C. General Information:

1. CSMS0620D-xxx_, "CSMS0620D" = P/N, "xxx" = Inductance, "_" = Tolerance.
2. Tolerance "_": M: ± 20%, N: ± 30%
3. Magnetically shielded
4. High saturation current
5. Storage temperature: -40°C to +85°C.
6. Operating temperature range: -25°C to +125°C (Including self-heating).
7. Inductance measured using the HP4285A and Chroma1320 & 3302.
8. DCR measured using Chroma 16502.
9. SRF measured using the HP4291B.
10. Saturation Current Idc1: The value of current causes a 30% Inductance reduction from initial value. (at : 20 °C ambient)
11. Temperature rise current Idc2: The value of current causes a 40°C temperature rise. (at : 20 °C ambient)
12. Rated Current: Either Idc1 or Idc2 whichever is smaller.
13. MSL: Level 1.
14. Inductance and Current range: From 0.8 μH (4100mA) to 22.0 μH (950mA).

D. Applications:

1. Game Consoles
2. Set Top Boxes
3. Cables Modems
4. Computers
5. Mobile Communication Devices (Cell Phones, Radios, etc.)
6. PDA, LCD, DVD, BRP, HD.




CSMS0620D Series SMD WIRE WOUND POWER INDUCTORS (SHIELDED)

Rev. A

E. Characteristics Curve:

Inductance vs. Frequency

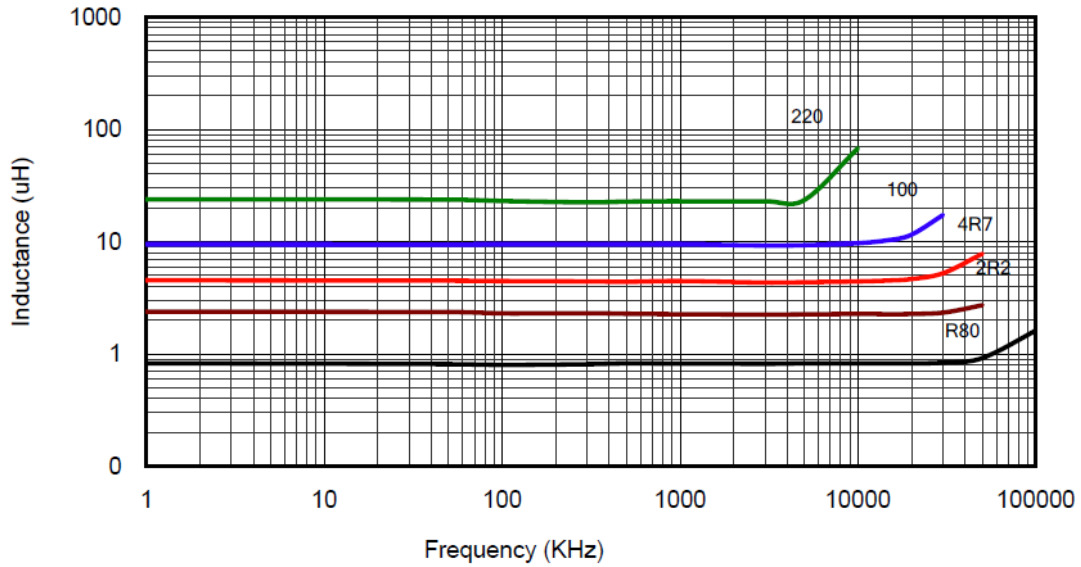

Inductance vs. DC Current

