

BDX65 – A – B – C

NPN SILICON DARLINGTON POWER TRANSISTOR

The BDX65, BDX65A, BDX65B and BDX65C are mounted in TO-3 metal package.
High current power darlington transistors designed for power amplification and switching applications.
The complementary PNP are BDX64, BDX64A, BDX64B, BDX64C.
Compliance to RoHS.

ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings		Value	Unit
V _{CEO}	Collector-Emitter Voltage	BDX65	60	V
		BDX65A	80	
		BDX65B	100	
		BDX65C	120	
V _{CBO}	Collector-BaseVoltage	BDX65	80	V
		BDX65A	100	
		BDX65B	120	
		BDX65C	140	
V _{EBO}	Emitter-Base Voltage		5.0	V
I _C	Collector Current	I _{C(RMS)}	12	A
		I _{CM}	16	
I _B	Base Current		0.2	A
P _T	Power Dissipation	@ T _C = 25°	117	W
T _J	Junction Temperature		-55 to +200	℃
T _S	Storage Temperature			

THERMAL CHARACTERISTICS

Symbol	Ratings		Value	Unit
R_{thJ-C}	Thermal Resistance, Junction to Case		1.5	$^\circ\text{C/W}$

BDX65 – A – B – C

ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise noted

Symbol	Ratings	Test Condition(s)		Min	Typ	Max	Unit
$V_{CEO(SUS)}$	Collector-Emitter Breakdown Voltage (*)	$I_C=0.1\text{ A}$ $I_B=0$ $L=25\text{mH}$	BDX65	60	-	-	V
			BDX65A	80	-	-	
			BDX65B	100	-	-	
			BDX65C	120	-	-	
I_{CEO}	Collector Cutoff Current	$V_{CE}=30\text{ V}$	BDX65	-	-	1	mA
		$V_{CE}=40\text{ V}$	BDX65A	-	-		
		$V_{CE}=50\text{ V}$	BDX65B	-	-		
		$V_{CE}=60\text{ V}$	BDX65C	-	-		
I_{EBO}	Emitter Cutoff Current	$V_{BE}=5\text{ V}$	BDX65	-	-	5.0	mA
			BDX65A				
			BDX65B				
			BDX65C				
I_{CBO}	Collector-Base Cutoff Current	$V_{CBO}=60\text{ V}$	BDX65	-	-	0.4	-
		$V_{CBO}=40\text{ V}$ $T_{CASE}=200^\circ\text{C}$		-	-	3	
		$V_{CBO}=50\text{ V}$	BDX65A	-	-	0.4	
		$V_{CBO}=80\text{ V}$ $T_{CASE}=200^\circ\text{C}$		-	-	3	
		$V_{CBO}=100\text{ V}$	BDX65B	-	-	0.4	
		$V_{CBO}=60\text{ V}$ $T_{CASE}=200^\circ\text{C}$		-	-	3	
		$V_{CBO}=120\text{ V}$	BDX65C	-	-	0.4	
		$V_{CBO}=70\text{ V}$ $T_{CASE}=200^\circ$		-	-	3	
$V_{CE(SAT)}$	Collector-Emitter saturation Voltage (*)	$I_C=5.0\text{ A}$ $I_B=20\text{ mA}$	BDX65	-	-	2	V
			BDX65A				
			BDX65B				
			BDX65C				
V_F	Forward Voltage (pulse method)	$I_F=3\text{ A}$	BDX65	-	1.8	-	V
			BDX65A				
			BDX65B				
			BDX65C				
V_{BE}	Base-Emitter Voltage (*)	$I_C=5.0\text{ A}$ $V_{CE}=3\text{ V}$	BDX65	-	-	2.5	V
			BDX65A				
			BDX65B				
			BDX65C				

BDX65 – A – B – C


Symbol	Ratings	Test Condition(s)		Min	Typ	Max	Unit
f_{hfe}	Cut-off frequency	$V_{CE}=3\text{ V}$ $I_C=5\text{ A}$	BDX65	-	50	-	kHz
			BDX65A				
			BDX65B				
			BDX65C				
f_T	Transition Frequency	$V_{CE}=3\text{ V}$ $I_C=5\text{ A}$ $f=1\text{ MHz}$	BDX65	-	7	-	MHz
			BDX65A				
			BDX65B				
			BDX65C				
h_{FE}	D.C. current gain (*)	$V_{CE}=3\text{ V}$ $I_C=1\text{ A}$	BDX65	-	3300	-	-
			BDX65A				
			BDX65B				
			BDX65C				
		$V_{CE}=3\text{ V}$ $I_C=5\text{ A}$	BDX65	1000	-	-	
			BDX65A				
			BDX65B				
			BDX65C				
		$V_{CE}=3\text{ V}$ $I_C=10\text{ A}$	BDX65	-	3700	-	
			BDX65A				
			BDX65B				
			BDX65C				

(*) Pulse Width $\approx 300\text{ }\mu\text{s}$, Duty Cycle $\angle 2.0\%$


BDX65 – A – B – C

MECHANICAL DATA CASE TO-3

DIMENSIONS (mm)		
	min	max
A	11	13.10
B	0.97	1.15
C	1.5	1.65
D	8.32	8.92
F	19	20
G	10.70	11.1
N	16.50	17.20
P	25	26
R	4	4.09
U	38.50	39.30
V	30	30.30

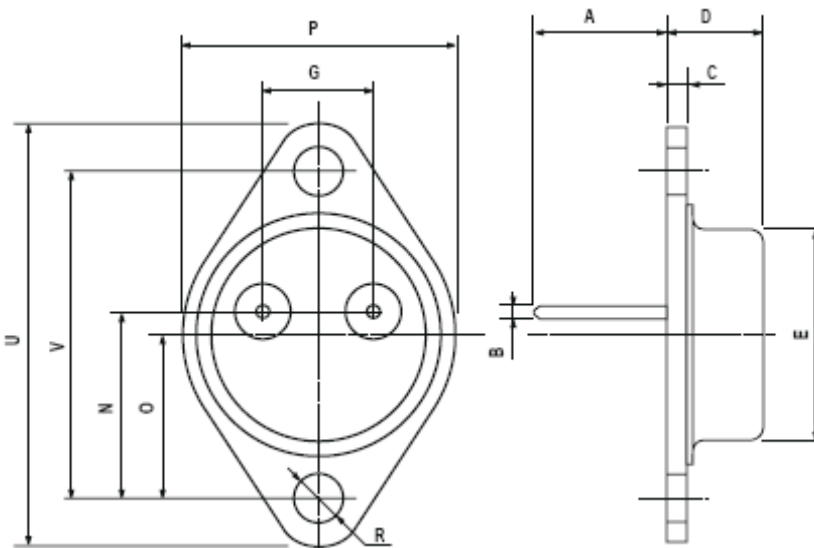

Pin 1 :	Base
Pin 2 :	Emitter
Case :	Collector



Revised September 2012

Information furnished is believed to be accurate and reliable. However, Comset Semiconductors assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may results from its use. Data are subject to change without notice. Comset Semiconductors makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Comset Semiconductors assume any liability arising out of the application or use of any product and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Comset Semiconductors' products are not authorized for use as critical components in life support devices or systems.