

Absolute encoders - bus interfaces

End or hollow shaft $\varnothing 12$ mm

Optical singleturn encoders 13 bit, CANopen

BFF, BFG CANopen



BFF CANopen with end shaft

Features

- Encoder singleturn / CANopen
- Optical sensing
- Resolution: 13 bit
- Integrated fieldbus interface
- Operating modes programmable
- Zero point configurable
- End or hollow shaft $\varnothing 12$ mm

Technical data - electrical ratings

Voltage supply	10...30 VDC
Consumption w/o load (typ.)	70 mA (24 VDC)
Initializing time (typ.)	170 ms after power on
Interface	CANopen
Function	Singleturn
Profile conformity	CANopen CiA DSP 301 4.01, DSP 305 V1.0, DSP 406 V3.0
Steps per turn	$\leq 8192 / 13$ bit
Absolute accuracy	$\pm 0.025^\circ$
Sensing method	Optical
Code	Binary
Code sequence	CW default, programmable
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-3
Programmable parameters	Operating modes Total resolution Scaling Rotation speed monitoring
Diagnostic functions	Position or parameter error Multiturn sensing
Approval	UL approval / E217823

Technical data - mechanical design

Dimensions (flange)	$\varnothing 58$ mm
Protection DIN EN 60529	IP 65
Operating speed	≤ 12000 rpm (mechanical) IP 42 ≤ 6000 rpm (mechanical) IP 65 ≤ 1830 rpm (electric)
Materials	Housing: aluminium Flange: aluminium
Operating temperature	$-20 \dots +85^\circ\text{C}$
Relative humidity	95 % non-condensing
Resistance	DIN EN 60068-2-6 Vibration 10 g, 10-200 Hz DIN EN 60068-2-27 Shock 50 g, 11 ms
Weight approx.	300 g
Connection	Connector D-SUB, 9-pin

BFF

Shaft	$\varnothing 12$ mm end shaft
Operating torque typ.	0.009 Nm (IP 42) 0.037 Nm (IP 65)

BFG

Shaft	$\varnothing 12$ mm hollow shaft
Operating torque typ.	0.0175 Nm (IP 42) 0.047 Nm (IP 65)

Absolute encoders - bus interfaces

End or hollow shaft ø12 mm


Optical singleturn encoders 13 bit, CANopen

BFF, BFG CANopen

Part number


End shaft

BFF 1N. 24B 8192 - - F

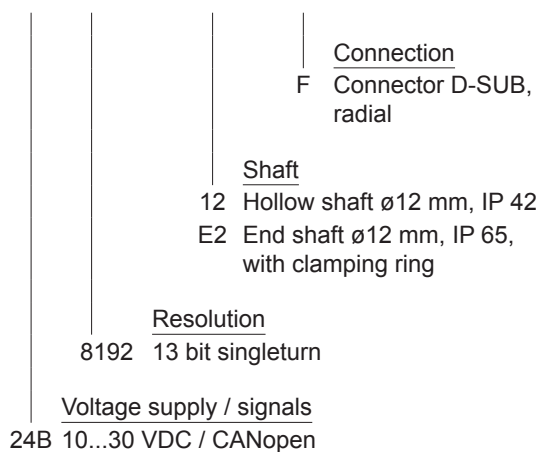

Hollow shaft

BFG 1N. 24B 8192 - E2 - F

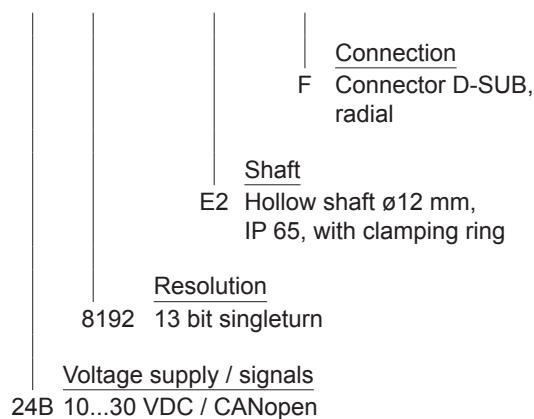

Accessories

Mounting accessories

10110616	Clamp set
10107540	Torque pin
10109520	Torque spring washer
10136635	Set of spring coupling for encoders ø58 mm
10142556	Clamping ring set for 12 mm hollow shaft

Programming accessories

10147362	CD-ROM with GSD-/EDS-/XML files and user manuals
----------	--

Absolute encoders - bus interfaces

End or hollow shaft $\varnothing 12$ mm

Optical singleturn encoders 13 bit, CANopen

BFF, BFG CANopen

Terminal significance

+Vs	Encoder supply voltage.
0 V	Encoder ground connection relating to +Vs.
CAN_L	CAN bus signal (dominant Low).
CAN_H	CAN bus signal (dominant High).
CAN_GND	GND relating to CAN interface.


CANopen features

Bus protocol	CANopen
Device profile	CANopen - CiA DSP 406, V 3.0 (Device Class 2, CAN 2.0B)
Operating modes	- Event-triggered / Time-triggered - Remotely-requested - Sync (cyclic) / Sync (acyclic)
Preset	Parameter for setting the encoder to a requested position value assigned to a defined shaft position of the system. The offset of encoder zero point and mechanical zero point is stored in the encoder.
Rotating direction	Parameter for defining the rotating direction in which there have to be ascending or descending position values. Default setting: Ascending position values when looking at the flange and rotating the shaft clockwise.
Scaling	Parameter defining the steps per turn as well as the total resolution.
Diagnosis	The encoder supports the following error warnings: - Position and parameter error - Lithium battery voltage (multi-turn)
Node Monitoring	Heartbeat or Nodeguarding
Default	50 kbit/s, Node ID 1

Terminal assignment

Connector D-Sub male

Connector	Signals	Description
Pin 1	n.c.	–
Pin 2	CAN_L	Bus (dominant Low)
Pin 3	CAN_GND	CAN Ground
Pin 4	n.c.	–
Pin 5	n.c.	–
Pin 6	0 V	Supply voltage
Pin 7	CAN_H	Bus (dominant High)
Pin 8	n.c.	–
Pin 9	+Vs	Supply voltage



Absolute encoders - bus interfaces


End or hollow shaft $\varnothing 12$ mm

Optical singleturn encoders 13 bit, CANopen

BFF, BFG CANopen

Dimensions

BFF CANopen

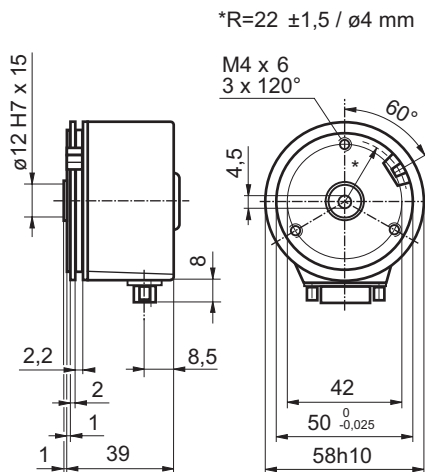

BFG CANopen

