

Description

The Elma Bustronic CompactPCI backplane series is designed to be fully compliant with PICMG standards. The EasyPlug line features Positronic 47-pin power connectors on the backplane. The monolithic backplanes have pluggable modules that eliminate cabling in the chassis, reducing system costs and allowing more swappability. The 3U and 6U cPCI versions are standardly with the power connectors in a vertically oriented position. The 9U cPCI are standardly with the power connectors in a horizontally oriented position.

The new EasyPlug CompactPCI backplane line allows pluggability for power supplies, fan trays, utility headers, and shelf managers. This reduces mean-time-to-repair (MTTR) and time-consuming cabling costs. We have provided all the standard features required for full compatibility, including all pin connections for bussed signal lines and all defined power and ground pins connected to their respective planes. User defined VI/O is standard. All standard CPCI backplanes conform to the PICMG basic specification 2.0 R2.1 and Hot Swap specification 2.1 R2.0. All Bustronic backplanes are designed to maximize performance, minimize noise, and give the customer the most reliable, cost-effective products possible. To achieve superior performance, we construct the board in eight layers (12 layers for H.110) three signal layers, five power ground planes. We incorporate a full stripline design, generously distributed decoupling capacitors, and 2 oz. power and ground planes. Our standard design with two 2oz. copper ground planes fully shield the backplane, minimize EMI/RFI emissions susceptibility, minimize crosstalk, and maximize power distribution.

Features

- Conforms to PICMG basic specification 2.0 R3.0
- Conforms to PICMG Hot Swap specification 2.1 R2.0
- Versions conforming to PICMG H.110 Computer Telephony specification 2.5 R1.0
- Right or left justified system slot
- 47-pin Positronic power supply connectors – vertically mounted in 3U, 6U versions and horizontally mounted in 9U versions
- Virtually zero crosstalk
- Logical slot #1 (system controller) is right justified

Board Specifications

- 8-layer board
(12-layer for H.110)
- 2 oz. copper power and ground
- PCB UL recognized 94V-0
- PCB FR-4 or equivalent
- PCB .125" thick
(.132" thick for H.110)

Mechanical Specifications


- 3U - 8 slots
- 6U - 8, 14, 16 slots
- 9U - 2, 4, 6, 8 slots
- 64-bit (32-bit capable)



Close-up of Power Studs

EasyPlug™ CompactPCI Backplane

Line Drawing

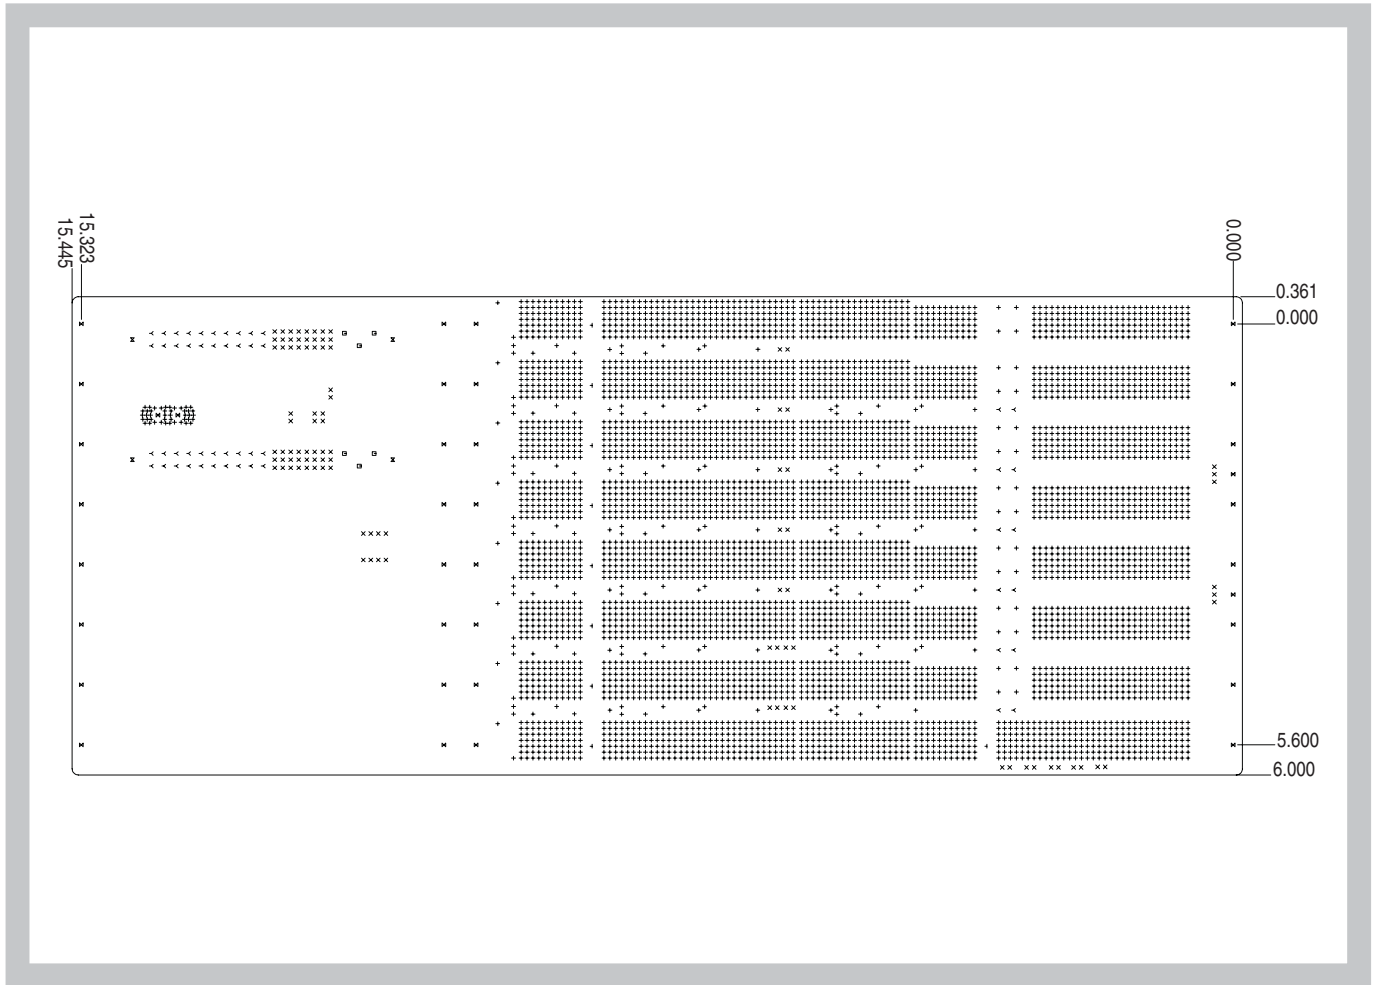

ORDER INFORMATION

| Slots | Height | Width | Description | Part Number |
|-------|--------|------------|--|-------------|
| 8 | 3U | 7.999 in. | One 47-pin, vertical, right justified | 103CPCR308 |
| 8 | 6U | 8.000 in. | One 47-pin, vertical, right justified | 103CPCR608 |
| 14 | 6U | 15.967 in. | Three 47-pin, vertical, right justified | 103CPCI614 |
| 14 | 6U | 15.967 in. | Three 47-pin, vertical, H.110, right justified | 103CTEL614 |
| 16 | 6U | 15.967 in. | Two 47-pin, vertical, left justified | 103CPCLE16 |
| 16 | 6U | 15.967 in. | Two 47-pin, vertical, H.110, left justified | 103CTEL616 |
| 2 | 9U | 1.670 in. | One 47-pin, horizontal, left justified | 103CPCI902 |
| 2 | 9U | 1.670 in. | One 47-pin, horizontal, H.110, left justified | 103CTEL902 |
| 4 | 9U | 3.180 in. | Two 47-pin, horizontal, left justified | 103CPCI904 |
| 4 | 9U | 3.180 in. | Two 47-pin, horizontal, H.110, left justified | 103CTEL904 |
| 6 | 9U | 4.700 in. | Two 47-pin, horizontal, left justified | 103CPCI906 |
| 6 | 9U | 4.700 in. | Two 47-pin, horizontal, H.110, left justified | 103CTEL906 |
| 8 | 9U | 6.380 in. | Three 47-pin, horizontal, left justified | 103CPCI908 |
| 8 | 9U | 6.380 in. | Three 47-pin, horizontal, H.110 left justified | 103CTEL908 |

EasyPlug™ CompactPCI Backplane

(Example: 103CPCI902-3157)

| 103 | Product | Form | Slots | - - - - - Configuration |
|-----|--|------|-------|---|
| | Product CPCI = CPCI Backplane, 64 Bit CTEL = H.110 compatible, 64 Bit CPCR, CTER = 64 Bit, system slot right CPCL = 64 Bit, system slot left CP3R, CT3R = 32 Bit, system slot right CP3L, CT3L = 32 Bit, system slot left | | | |
| | Form 3 = 3U height 6 = 6U height 7 = 7U height 9 = 9U height | | | |
| | Slots 1-21 | | | |
| | Configuration Power Interface | | | |
| | 0 = Power taps with 6-32 screws 1 = 3 Positronic connectors for 6U power supplies 2* = 6-32 nuts and fastons for +12V, -12V 3 = 1 Positronic connector for 3U power supply 4 = 2 Positronic connectors for 3U power supplies 5 = 3 Positronic connectors for 6U power supplies 6 = 1 Positronic connector for 6U power supply 7# = 2 Positronic connectors for 6U power supplies 8 = 4 Positronic connectors for 3U power supplies 9 = Custom (9XXX sequential numbers) X = Not applicable | | | * This is the only power interface for 3U backplanes # Standard configuration for 16 slot backplanes |
| | Connectors for P1 & P2 | | | |
| | 0 = P1 short, P2 long 1 = P1 short, P2 short 2 = P1 short, No P2 X = Not applicable | | | |
| | Connectors for P3, P4 & P5 | | | |
| | 0 = Not applicable 1 = Not applicable 2 = Not applicable 3 = P3 long type AB, P4 tye A long all slots, P5 long type AB for CTEL 4 = P3 long type AB, P4 short (slot 1 long), P5 long type AB for CTEL 5 = P3 & P5 long type AB, P4 long type A X = Not applicable | | | |
| | Shrouds | | | |
| | 0 = P2 only 1 = Not applicable 2 = Not applicable 3 = Not applicable 4 = Not applicable 5 = P2 if long tail, P4 type A all slots, P3 & P5 type AB for CTEL 6 = P2 if long tail, P4 slot 1 type A, P3 & P5 type AB for CTEL 7 = P2 if long tail, P4 type A, P3 & P5 type AB X = Not applicable | | | |
| | RoHS | | | |
| | R = RoHS compliant | | | |

Common Configuration Examples

-21XX -21XXR -3157 -3157R -1157 -1157R -7157 -7157R

EasyPlug™ CompactPCI Backplane

Two 2 oz. copper voltage planes allow us to maximize power distribution while they act as virtual ground planes for the signals in order to minimize noise and crosstalk. There is also a full V/I/O plane. We use stripline construction to assure the highest possible performance. By exclusively utilizing stripline construction, we eliminate a significant source of EMI/RFI radiation and give all the signals similar characteristic impedances, virtually identical propagation delays, and minimal signal skew. All these items allow for significantly higher data transfer rates, as signal skew factors into the data transfer rate calculations four times.

User Manual for Bridgeable Backplanes

Background

CompactPCI bridging was developed to circumvent the 9-load limitation on 8-slot boards. The CPU board generates two loads and the I/O boards generate one load each. The bridgeboards put an extra load on a slot; therefore, the segments are limited to seven loads. Bridgeboards provide up to 256 CompactPCI segments in a system. The segment containing the CPU board is called the primary or upstream segment. The segment on the other side of the bridgeboard is called the secondary or downstream segment.

Installation

14-slot cPCI: The bridgeboard is installed on the rear side of the backplane, covering slots 5 through 8. Place the unit on slot 5 rP1 and rP2 and slot 8 rP1 and rP2.

16-slot cPCI: The bridgeboard is installed on the rear side of the backplane, covering slots 4 through 9. Place the unit on slot 4 rP1 and rP2 and slot 9 rP1 and rP2.

Notes

JP1 - - JP1 is the jumper for +5V operation and JP2 for +3.3V operation.

| | H9 | IDSEL2-1 | SYSEN2-2 | REQ_P, GNT_P, CLK_P |
|----------------|---------------------------|---------------------------|---------------------------|---------------------------|
| Without Bridge | this jumper is mounted | this jumper is mounted | this jumper is mounted | this jumper is mounted |
| With Bridge | this jumper is left blank | this jumper is left blank | this jumper is left blank | this jumper is left blank |

Bridge

32-bit, 64-bit

33 Mhz

PCB height 95.10 mm

PCB width 78.96 mm

PCB thickness 2.70 mm

The bridge is 4 slots wide and covers P1 and P2 on the rear of the backplane. On the 14-slot backplane, it plugs into rear slot 5 and slot 8.

EasyPlug™ CompactPCI Backplane

Design Elements

Power Distribution

The Elma Bustronic EasyPlug cPCI backplane series features the 47-pin Positronic power connector. The 3U and 6U cPCI versions are standardly with the power connectors in a vertically oriented position. The 9U cPCI are standardly with the power connectors in a horizontally oriented position.

Signal Layout

The Elma Bustronic design conforms to the PICMG basic specification 2.0 R3.0 and basic Hot Swap specifications 2.0 R2.0. Some versions comply with the PICMG 2.5 R 1.0 Computer Telephony and/or PICMG 2.16 Packet Switching specifications. A minimum stub length is utilized in routing and interconnecting to the signal traces. Our design techniques avoid crosstalk and noise caused by inadequate ground and power.

Jumpering

Jumpers can be installed to close a circuit. The backplane has labeled areas for jumper installation. The following applies to all of Elma Bustronic's CompactPCI and H.110 backplanes in 2-8 slot sizes. Configurations with 2-5 slots have an addition jumper consideration, the M66EN# jumper.


64-EN# Jumper

If the jumper is installed, 64-EN# P2-B5 (see Hot Swap specification, PICMG 2.1) is ground, and 64-bit boards will initialize for 64-bit operation. If the jumper is not installed, 64-EN# is open, and 64-bit boards will initialize for 32-bit operation.

2-5 Slot Backplane Only

M66EN# Jumper

If the jumper is installed M66EN# P1-D21 is ground and the backplane operates in 33MHz mode. If the jumper is not installed M66EN# is bussed and the backplane operates in 66MHz mode.

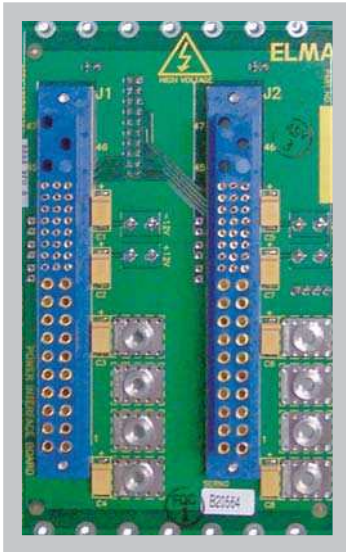

Related Products from Elma Electronic:

- System Platforms – need a chassis for your backplane?
- cPCI Embedded Computing Products – SBCs, Switches, Storage, and More



Did you know we also offer with this cPCI backplane?

- cPCI Extenders, load boards, RTMs, test modules
- Customization, integration

System
Platforms

Backplanes

Enclosures &
Components

Cabinets

Rotary
Switches

ELMA
Your Solution Partner