

Encoders without bearing

Combination of sensor / magnet rotor
Resolution max. 1024 ppr

MDFK 08



MDFK 08

Features

- Magnetic sensor with rotor
- Resolution max. 4096 steps
- Output signals A 90° B or A 90° B +N
- Output circuits: push-pull and RS422
- Non-contact, wear-free sensing system
- High resistance to dirt
- Narrow mounting design

Technical data - electrical ratings

Resolution (steps/turn)	256...1024
Reference signal	Zero pulse, width 90°
Output frequency	≤1.6 MHz (8-fold interpolation) ≤3.2 MHz (16-fold interpolation)
System accuracy	±0.5 °
Jitter	≤15 %
Interpolation	8-fold, 16-fold
MDFK 08G	
Voltage supply	8...30 VDC
Reverse polarity protection	Yes, to GND
Consumption w/o load	≤30 mA
Output signals	A 90° B A 90° B, 0
Output circuit	Push-pull short-circuit proof
Circuit current max.	50 mA
Voltage drop	<2 VDC (I=20 mA)

MDFK 08T

Voltage supply	5 VDC ±5 %
Reverse polarity protection	No
Consumption w/o load	≤15 mA
Output signals	A 90° B + inverted A 90° B, N + inverted
Output circuit	RS422
Circuit current max.	RS422 specific
Voltage drop	RS422 specific

Technical data - mechanical design

Dimensions W x H x L	15 x 8.5 x 45.5 mm
Protection DIN EN 60529	IP 67
Working distance max.	0.6 mm
Starting torque	0.4 Nm
Material	Housing: PC
Operating temperature	-25...+85 °C
Relative humidity	95 %
Resistance	DIN EN 60068-2-6 Vibration 20 g, 10-2000 Hz DIN EN 60068-2-27 Shock 100 g, 6 ms
Weight approx.	105 g
Connection	Cable 2 m

Encoders without bearing

Combination of sensor / magnet rotor

Resolution max. 1024 ppr

MDFK 08

Part number

Push-pull

MDFK 08G



	Interface / Interpolation
2101	A/B / 8-fold
2124/N16	A/B / 16-fold
8124/N8	A/B/N / 8-fold
8124	A/B/N / 16-fold

RS422

MDFK 08T



	Interface / Interpolation
7101	A/B + inv. / 8-fold
7105/N16	A/B + inv. / 16-fold
8101	A/B/N + inv. / 8-fold
8105/N16	A/B/N + inv. / 16-fold

Selection of sensor / magnet rotor

required pulse per turn	sensor-interpolation	poles per magnetring/rotor
256	8-fold	32
400	8-fold	50
512	16-fold	32
800	16-fold	50
1024	16-fold	64
other pulses on request		


Accessories

Mounting accessories


10134683	Mounting bracket for MDFK 08 3-channel
----------	--

Mounting and direction of travel

2-channel




3-channel

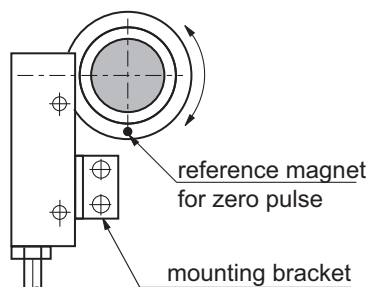


CHA is leading CHB by 90° when rotating CW


Working distance

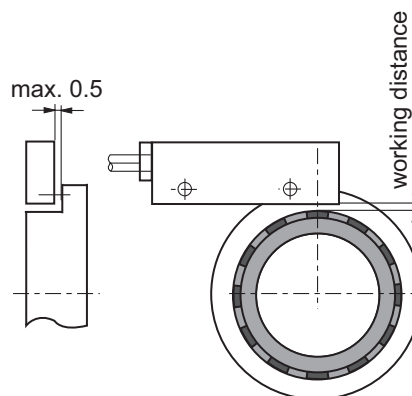

Axial misalignment



Angular misalignment



Encoders without bearing


Combination of sensor / magnet rotor

Resolution max. 1024 ppr

MDFK 08

Output signals


push-pull

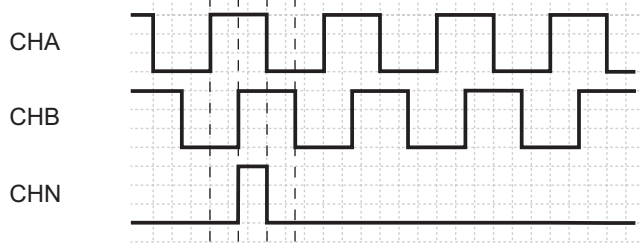

3-channel version with zero-pulse (CHN)

2-channel version without zero-pulse


RS422

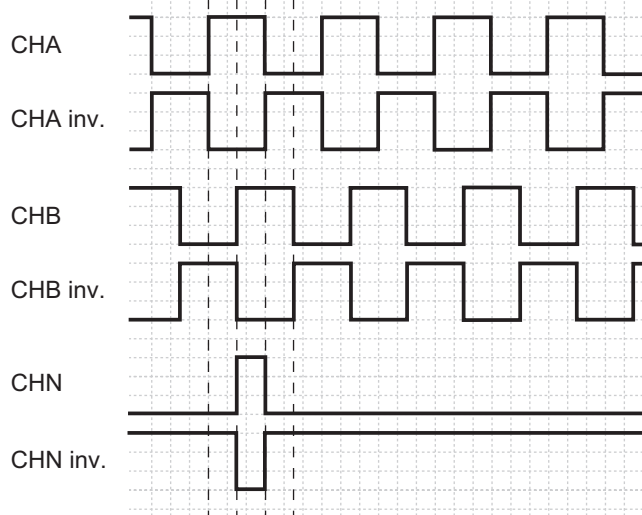

3-channel-version with zero-pulse (CHN/CHN inv.)

3-channel-version with zero-pulse

Dimensions

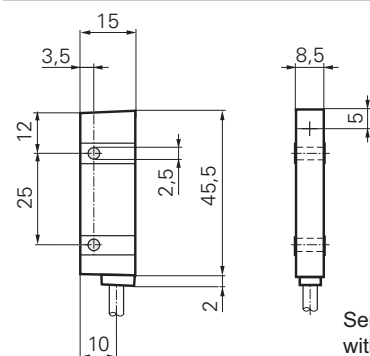

Sensor can also be mounted
with self-tapping special screws
(PT KA30)

Terminal assignment

Push-pull A 90° B (2-channel)

cable color		signals
brown	BN	+Vs
blue	BU	0 V
black	BK	CHA
white	WH	CHB
cable data PUR 4 x 0.25 mm ²		

Push-pull A 90° B, N (3-channel)

cable color		signals
brown	BN	+Vs
yellow	YE	CHB
green	GN	CHA
pink	PK	CHN
white	WH	0 V
cable data PUR 5 x 0.14 mm ² , shielded		

RS422 A 90° B + inv. (2-channel)

cable color		signals
brown	BN	+Vs
green	GN	CHA
pink	PK	CHA inv.
yellow	YE	CHB
gray	GY	CHB inv.
white	WH	0 V
cable data PUR 6 x 0.14 mm ²		

RS422 A 90° B, N + inv. (3-channel)

cable color		signals
brown	BN	+Vs
green	GN	CHA
red	RD	CHA inv.
yellow	YE	CHB
blue	BU	CHB inv.
pink	PK	CHN
gray	GY	CHN inv.
white	WH	0 V
cable data PUR 8 x 0.14 mm ² , shielded		


Encoders without bearing

Combination of sensor / magnet rotor

Resolution max. 1024 ppr


MDFK 08

Ring magnets



max. speed 20'000 rpm


MRAP X32/031X022	magnetring 32 pole
MRAP X36/031X022	magnetring 36 pole



max. speed 10'000 rpm


MRAP X50/056X048	magnetring 50 pole
MRAP X64/056X048	magnetring 64 pole

Magnet rotors without reference magnet



max. speed 20'000 rpm


MSAP X32/031X006	magnetrotor 32 pole w/o ref.
MSAP X36/031X006	magnetrotor 36 pole w/o ref.

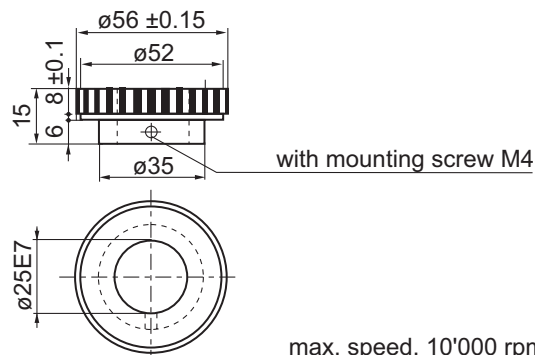

max. speed. 10'000 rpm


MSAP X50/056X025	magnetrotor 50 pole w/o ref.
MSAP X64/056X025	magnetrotor 64 pole w/o ref.

Magnet rotors with reference magnet

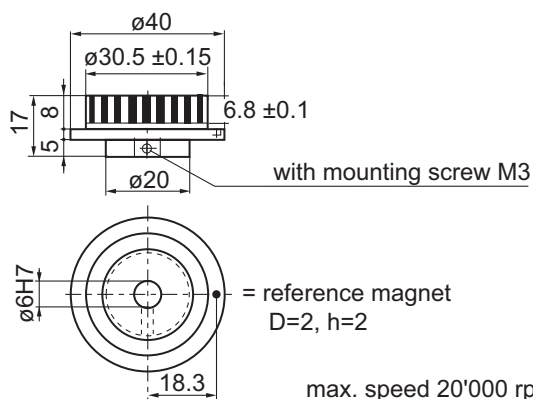

max. speed 20'000 rpm

MSAP Z32/040X006	magnetrotor 32 pole with ref.
MSAP Z36/040X006	magnetrotor 36 pole with ref.

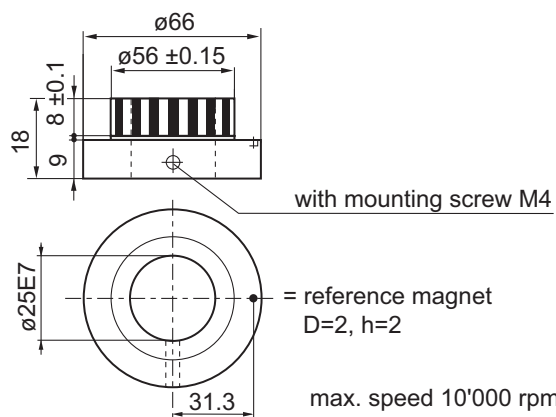

max. speed 10'000 rpm

MSAP Z50/066X025	magnetrotor 50 pole with ref.
MSAP Z64/066X025	magnetrotor 64 pole with ref.