General purpose transistor (isolated transistor and diode)

FML9

A 2SB1689 and a RB461F are housed independently in a UMT package.

●Applications
DC / DC converter
Motor driver

●Features
1) Tr : Low V_{CE}(sat)
Di : Low V_F
2) Small package

●Structure
Silicon epitaxial planar transistor
Schottky barrier diode

●External dimensions (Unit : mm)

FML9



Each lead has same dimensions

ROHM : SMT5
EIAJ : SC-74A

●Equivalent circuit



●Packaging specifications

Type	FML9
Package	SMT5
Marking	L9
Code	TR
Basic ordering unit(pieces)	3000

●**Absolute maximum ratings** (Ta=25°C)

Tr1

Parameter	Symbol	Limits	Unit
Collector-base voltage	V_{CBO}	–15	V
Collector-emitter voltage	V_{CEO}	–12	V
Emitter-base voltage	V_{EBO}	–6	V
Collector current	I_C	–1.5	A
	I_{CP}	–3	A *1
Power dissipation	Pc	200	mW *2
Junction temperature	Tj	150	°C
Range of storage temperature	Tstg	–40 to +125	°C

*1 Single pulse, Pw=1ms.
*2 Each terminal mounted on a recommended land.

Di2

Parameter	Symbol	Limits	Unit
Reak reverse voltage	V_{RM}	25	V
Average rectified forward current	I_F	700	mA
Forward current surge peak (60Hz, 1∞)	I_{FSM}	3	A
Reverse voltage (DC)	V_R	20	V
Junction temperature	Tj	125	°C
Range of storage temperature	Tstg	–40 to +125	°C

●**Electrical characteristics** (Ta=25°C)

Tr1

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-emitter breakdown voltage	BV_{CEO}	–12	–	–	V	I_C=–1mA
Collector-base breakdown voltage	BV_{CBO}	–15	–	–	V	I_C=–10μA
Emitter-base breakdown voltage	BV_{EBO}	–6	–	–	V	I_E=–10μA
Collector cut-off current	I_{CBO}	–	–	–100	nA	V_{CB}=–15V
Emitter cut-off current	I_{EBO}	–	–	–100	nA	V_{EB}=–6V
Collector-emitter saturation voltage	$V_{CE(sat)}$	–	–110	–200	mV	I_C=–500mA, I_B=–25mA
DC current gain	h_{FE}	270	–	680	–	V_{CE}=–2V, I_C=–200mA
Transition frequency	f_T	–	400	–	MHz	V_{CE}=–2V, I_E=200mA, f=100MHz
Collector output capacitance	Cob	–	12	–	pF	V_{CB}=–10V, I_E=0mA, f=1MHz

Di2

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Forward voltage	V_F	–	–	490	mV	I_F=700mA
Reverse current	I_R	–	–	200	μA	V_R=20V

●**Electrical characteristic curves**

Tr1

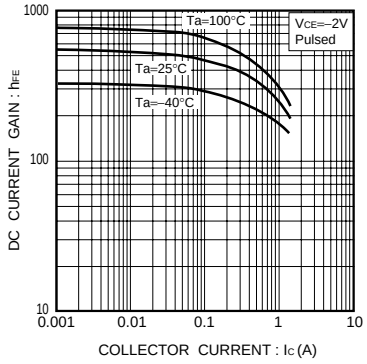

Fig.1 DC current gain vs. collector current

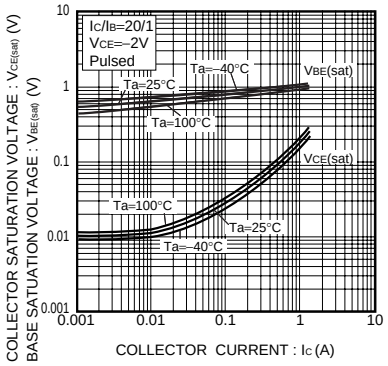

Fig.2 Base-emitter saturation voltage vs. collector current

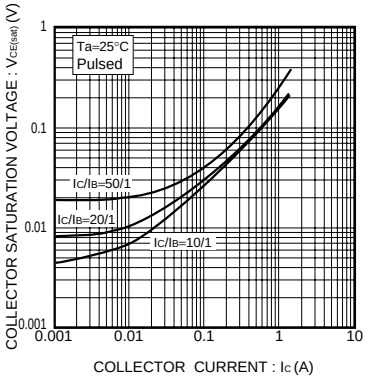

Fig.3 Collector-emitter saturation voltage vs. collector current

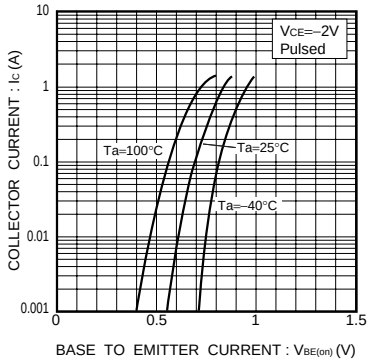

Fig.4 Grounded emitter propagation characteristics

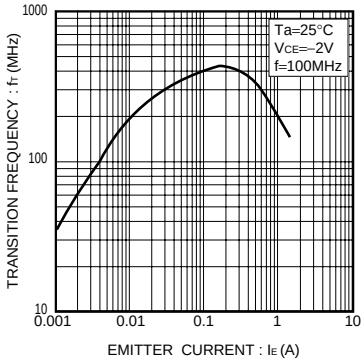

Fig.5 Gain bandwidth product vs. emitter current

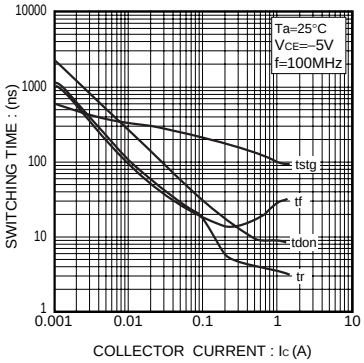

Fig.6 Switching time

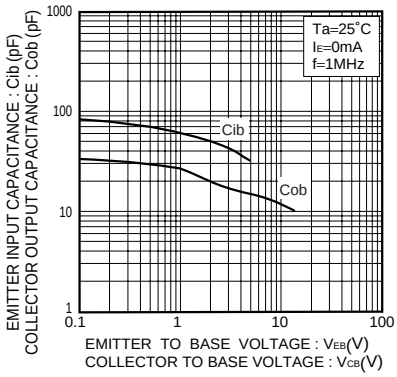

Fig.7 Collector output capacitance vs. collector-base voltage
Emitter input capacitance vs. emitter-base voltage

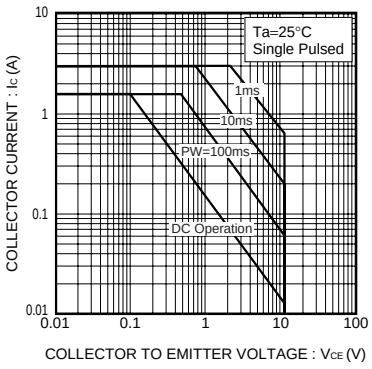

Fig.8 Safe operation area

Di2

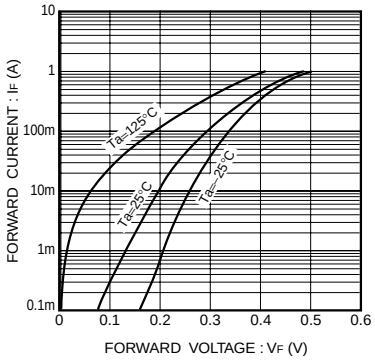

Fig.9 Forward characteristics

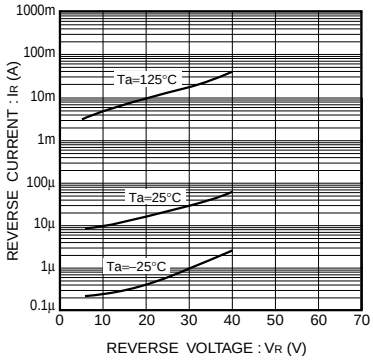

Fig.10 Reverse characteristics

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).
Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.
In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.