
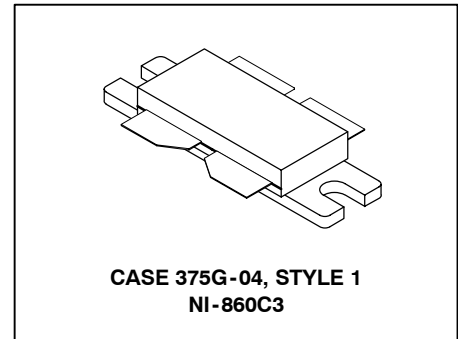


# RF Power Field-Effect Transistor

## N-Channel Enhancement-Mode Lateral MOSFET

Designed for broadband commercial and industrial applications with frequencies from 470 to 860 MHz. The high gain and broadband performance of this device make it ideal for large-signal, common source amplifier applications in 32 volt digital television transmitter equipment.

- Typical Broadband DVBT OFDM Performance @ 470-860 MHz, 32 Volts,  $I_{DQ} = 2.0$  A, 8K Mode, 64 QAM
  - Output Power — 45 Watts Avg.
  - Power Gain  $\geq 16.7$  dB
  - Efficiency  $\geq 21\%$
  - ACPR  $\leq -58$  dBc
- Typical Broadband ATSC 8VSB Performance @ 470-860 MHz, 32 Volts,  $I_{DQ} = 2.0$  A
  - Output Power — 80 Watts Avg.
  - Power Gain  $\geq 16.5$  dB
  - Efficiency  $\geq 27.5\%$
  - IMD  $\leq -31.3$  dBc
- Internally Input and Output Matched for Ease of Use
- Integrated ESD Protection
- Capable of Handling 10:1 VSWR, @ 32 Vdc, 860 MHz, 45 Watts DVBT OFDM Output Power
- Excellent Thermal Stability
- Characterized with Series Equivalent Large-Signal Impedance Parameters
- Available in Tape and Reel. R3 Suffix = 250 Units per 56 mm, 13 inch Reel. R5 Suffix = 50 Units per 56 mm, 13 inch Reel.

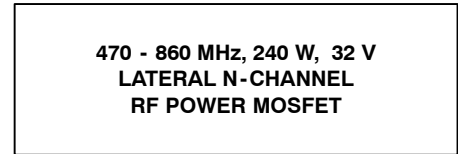

ARCHIVE INFORMATION

ARCHIVE INFORMATION

**Table 1. Maximum Ratings** <sup>(1)</sup>

Rating	Symbol	Value	Unit
Drain-Source Voltage	$V_{DSS}$	-0.5, +65	Vdc
Gate-Source Voltage	$V_{GS}$	-0.5, +15	Vdc
Drain Current - Continuous	$I_D$	17	Adc
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	486 2.78	W W/ $^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-65 to +150	$^\circ\text{C}$
Operating Junction Temperature	$T_J$	200	$^\circ\text{C}$

**Table 2. Thermal Characteristics**

Characteristic	Symbol	Value	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.36	$^\circ\text{C}/\text{W}$

**Table 3. ESD Protection Characteristics**

Test Conditions	Class
Human Body Model	1 (Minimum)
Machine Model	M3 (Minimum)
Charge Device Model	7 (Minimum)

1. Each side of device measured separately.

**NOTE - CAUTION** - MOS devices are susceptible to damage from electrostatic charge. Reasonable precautions in handling and packaging MOS devices should be observed.

**Table 4. Electrical Characteristics** ( $T_C = 25^\circ\text{C}$  unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
<b>Off Characteristics</b> <sup>(1)</sup>					
Drain-Source Breakdown Voltage ( $V_{GS} = 0\text{ Vdc}$ , $I_D = 10\ \mu\text{A}$ )	$V_{(BR)DSS}$	65	—	—	Vdc
Zero Gate Voltage Drain Current ( $V_{DS} = 32\text{ Vdc}$ , $V_{GS} = 0\text{ Vdc}$ )	$I_{DSS}$	—	—	1	$\mu\text{Adc}$
Gate-Source Leakage Current ( $V_{GS} = 5\text{ Vdc}$ , $V_{DS} = 0\text{ Vdc}$ )	$I_{GSS}$	—	—	1	$\mu\text{Adc}$
<b>On Characteristics</b> <sup>(1)</sup>					
Gate Threshold Voltage ( $V_{DS} = 10\text{ Vdc}$ , $I_D = 200\ \mu\text{A}$ )	$V_{GS(th)}$	—	2.8	—	Vdc
Gate Quiescent Voltage ( $V_{DS} = 32\text{ Vdc}$ , $I_D = 225\text{ mA}$ )	$V_{GS(Q)}$	—	3.5	—	Vdc
Drain-Source On-Voltage ( $V_{GS} = 10\text{ Vdc}$ , $I_D = 3\text{ A}$ )	$V_{DS(on)}$	—	0.27	—	Vdc
<b>Dynamic Characteristics</b> <sup>(1)</sup>					
Reverse Transfer Capacitance ( $V_{DS} = 28\text{ Vdc}$ , $V_{GS} = 0$ , $f = 1\text{ MHz}$ )	$C_{rss}$	—	3.2	—	pF
<b>Functional Characteristics</b> (In DVBT OFDM Single-Channel, Narrowband Fixture, 50 ohm system) <sup>(2)</sup>					
Common Source Power Gain ( $V_{DD} = 32\text{ Vdc}$ , $P_{out} = 45\text{ W Avg.}$ , $I_{DQ} = 2 \times 1000\text{ mA}$ , $f = 860\text{ MHz}$ )	$G_{ps}$	16.5	18.2	—	dB
Drain Efficiency ( $V_{DD} = 32\text{ Vdc}$ , $P_{out} = 45\text{ W Avg.}$ , $I_{DQ} = 2 \times 1000\text{ mA}$ , $f = 860\text{ MHz}$ )	$\eta$	21	22.9	—	%
Adjacent Channel Power Ratio ( $V_{DD} = 32\text{ Vdc}$ , $P_{out} = 45\text{ W Avg.}$ , $I_{DQ} = 2 \times 1000\text{ mA}$ , $f = 860\text{ MHz}$ )	ACPR	—	-59.2	-57	dBc
<b>Typical Characteristics</b> (In DVBT OFDM Single-Channel, Broadband Fixture, 50 ohm system) <sup>(2)</sup>					
Common Source Power Gain ( $V_{DD} = 32\text{ Vdc}$ , $P_{out} = 45\text{ W Avg.}$ , $I_{DQ} = 2 \times 1000\text{ mA}$ ) f = 470 MHz f = 560 MHz f = 660 MHz f = 760 MHz f = 860 MHz	$G_{ps}$	—	17.6 17.6 17.4 17.4 16.8	—	dB
Drain Efficiency ( $V_{DD} = 32\text{ Vdc}$ , $P_{out} = 45\text{ W Avg.}$ , $I_{DQ} = 2 \times 1000\text{ mA}$ ) f = 470 MHz f = 560 MHz f = 660 MHz f = 760 MHz f = 860 MHz	$\eta$	—	23.5 25.8 23.0 22.7 21.3	—	%
Adjacent Channel Power Ratio ( $V_{DD} = 32\text{ Vdc}$ , $P_{out} = 45\text{ W Avg.}$ , $I_{DQ} = 2 \times 1000\text{ mA}$ ) f = 470 MHz f = 560 MHz f = 660 MHz f = 760 MHz f = 860 MHz	ACPR	—	-59.3 -59.3 -58.7 -58.7 -58.1	—	dBc

- Each side of device measured separately.
- Measured in push-pull configuration.


**Table 4. Electrical Characteristics** ( $T_C = 25^\circ\text{C}$  unless otherwise noted) (continued)

Characteristic	Symbol	Min	Typ	Max	Unit
<b>Typical Characteristics</b> (In ATSC 8VSB Single-Channel, Broadband Fixture, 50 ohm system) <sup>(1)</sup>					
Common Source Power Gain ( $V_{DD} = 32\text{ Vdc}$ , $P_{out} = 80\text{ W Avg.}$ , $I_{DQ} = 2 \times 1000\text{ mA}$ )	$G_{ps}$				dB
f = 470 MHz		—	17.5	—	
f = 560 MHz		—	17.5	—	
f = 660 MHz		—	17.2	—	
f = 760 MHz		—	17.2	—	
f = 860 MHz		—	16.6	—	
Drain Efficiency ( $V_{DD} = 32\text{ Vdc}$ , $P_{out} = 80\text{ W Avg.}$ , $I_{DQ} = 2 \times 1000\text{ mA}$ )	$\eta$				%
f = 470 MHz		—	31.0	—	
f = 560 MHz		—	34.3	—	
f = 660 MHz		—	30.1	—	
f = 760 MHz		—	29.6	—	
f = 860 MHz		—	27.8	—	
Intermodulation Distortion ( $V_{DD} = 32\text{ Vdc}$ , $P_{out} = 80\text{ W Avg.}$ , $I_{DQ} = 2 \times 1000\text{ mA}$ )	IMD				dBc
f = 470 MHz		—	31.7	—	
f = 560 MHz		—	32.7	—	
f = 660 MHz		—	32.9	—	
f = 760 MHz		—	34.2	—	
f = 860 MHz		—	35.4	—	

1. Measured in push-pull configuration.

**Table 5. 845-875 MHz Narrowband Test Circuit Component Designations and Values**

Part	Description	Part Number	Manufacturer
B1, B2	Ferrite Beads, Surface Mount, 11 $\Omega$ (0805)	2508051107Y0	Fair-Rite
Balun 1, Balun 2	0.8-1GHz Xinger Balun	3A412	Anaran
C1	33 pF Chip Capacitor (0805)	08055J330JBT	AVX / Kyocera
C2	2.7 pF Chip Capacitor (0603)	06035J2R7BBT	AVX / Kyocera
C3	12 pF Chip Capacitor (0805)	08051J120GBT	AVX / Kyocera
C4, C5	6.8 pF Chip Capacitors (0805)	08051J6R8BBT	AVX / Kyocera
C6	2.7 pF Chip Capacitor (0805)	0805J2R7BBT	AVX / Kyocera
C7, C8, C9, C10	3.3 pF Chip Capacitors (0805)	08051J3R3BBT	AVX / Kyocera
C11, C12	2.2 $\mu$ F, 50 V Chip Capacitors	C1825C225J5RAC3810	Kemet
C13, C14, C15, C16	0.01 $\mu$ F, 100 V Chip Capacitors	C1825C103J1GAC	Kemet
C17, C18	0.56 $\mu$ F, 50 V Chip Capacitors	C1825C564J5RAC	Kemet
C19, C20	10 $\mu$ F, 50 V Tantalum Chip Capacitors	522Z050/100MTRE	Tecate
C21, C22, C23, C24	47 $\mu$ F, 16 V Tantalum Chip Capacitors	TPSD476K016R0150	AVX / Kyocera
C25, C26	470 $\mu$ F, 63 V Electrolytic Capacitors	NACZF471M63V (18x22)	Nippon
L1	12 nH Inductor (0603)	0603HC-12NXJB	CoilCraft
L2	7.15 nH Inductor	1606-7	CoilCraft
L3, L4	10 nH Inductor (0603)	0603HC-10NXJB	CoilCraft
R1, R2	24 $\Omega$ , 1/8 W, 5% Chip Resistors (1206)		
WB1, WB2, WB3, WB4	Brass Wear Shims		
PCB	Arlon 30 mil, $\epsilon_r = 2.56$	DS1152	DS Electronics

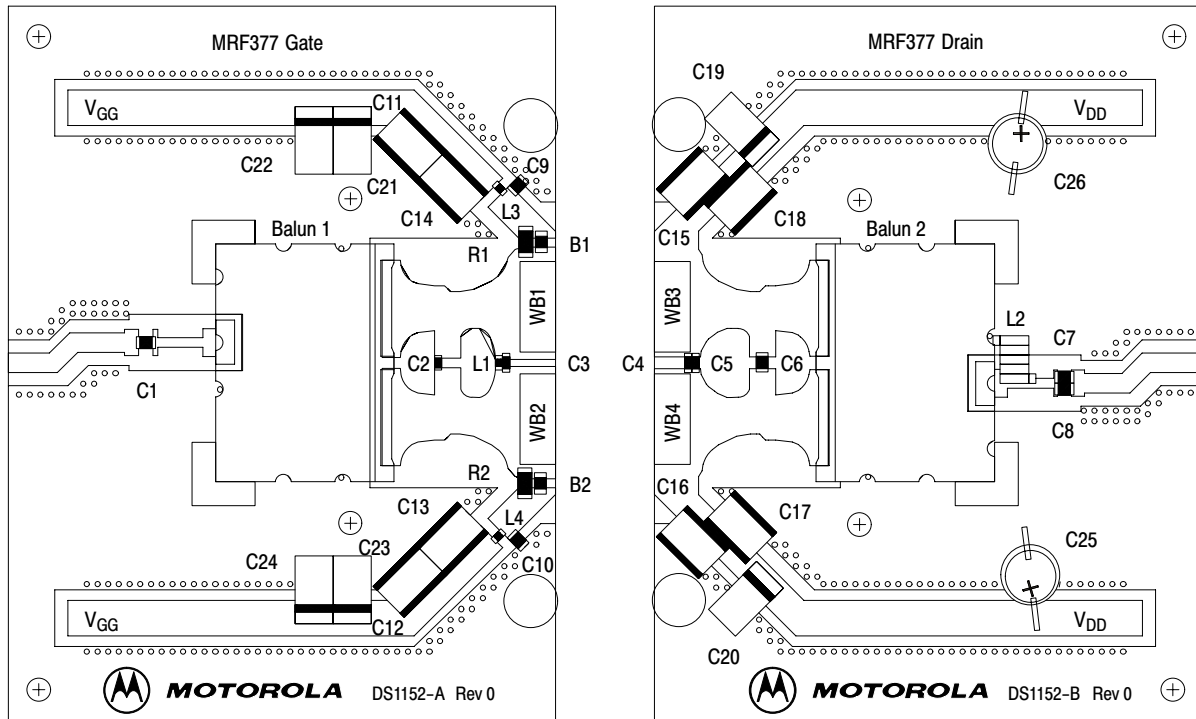

Freescale has begun the transition of marking Printed Circuit Boards (PCBs) with the Freescale Semiconductor signature/logo. PCBs may have either Motorola or Freescale markings during the transition period. These changes will have no impact on form, fit or function of the current product.

**Figure 1. 845-875 MHz Narrowband Test Circuit Component Layout**

## TYPICAL NARROWBAND CHARACTERISTICS

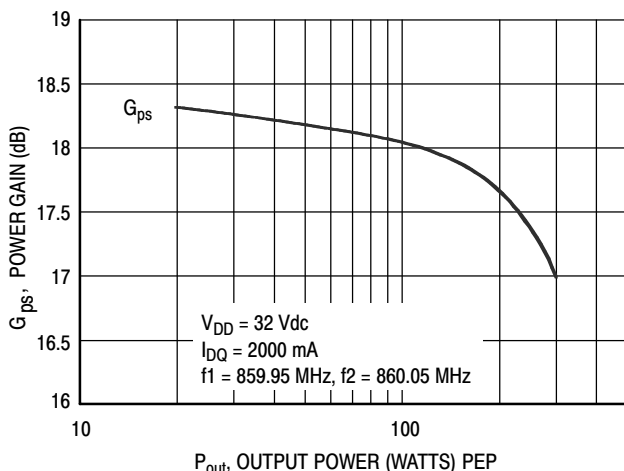


Figure 2. Two-Tone Power Gain versus Output Power

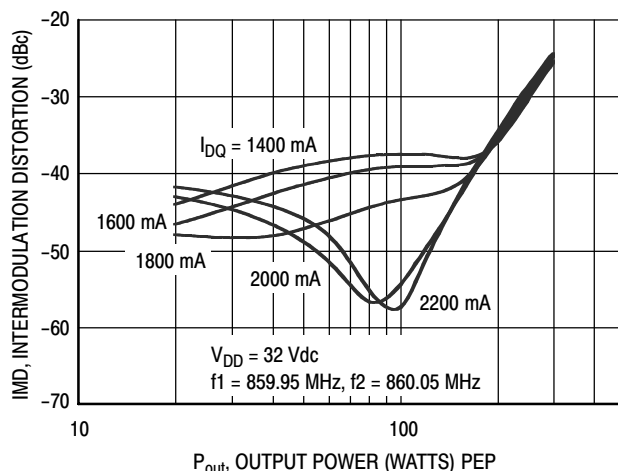


Figure 3. Third Order Intermodulation Distortion versus Output Power

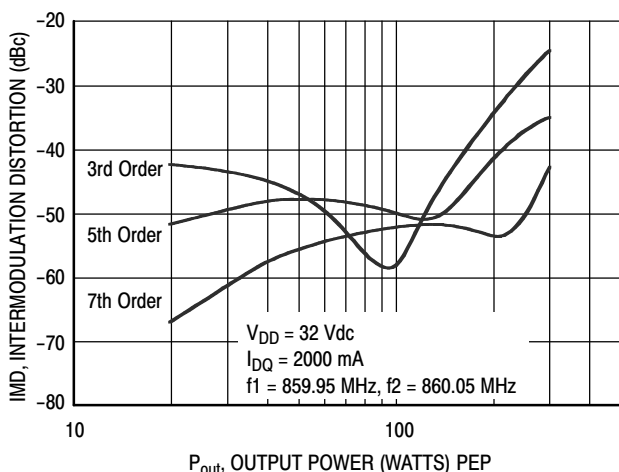


Figure 4. Intermodulation Distortion Products versus Output Power

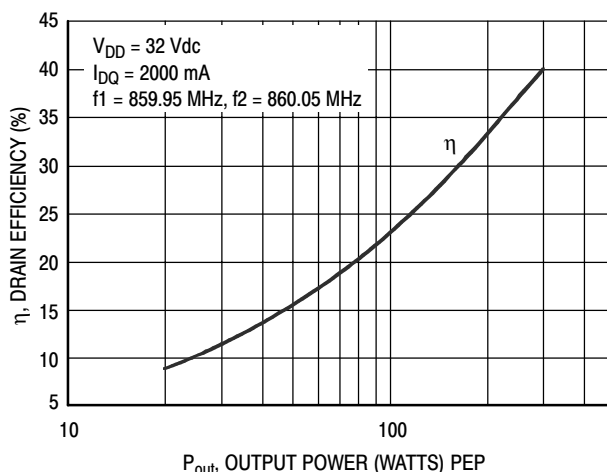


Figure 5. Two-Tone Drain Efficiency versus Output Power


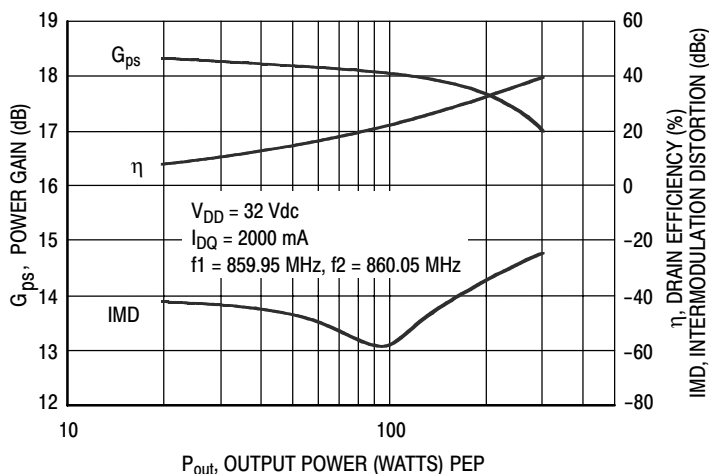


Figure 6. Power Gain, Efficiency and IMD versus Output Power

ARCHIVE INFORMATION

ARCHIVE INFORMATION

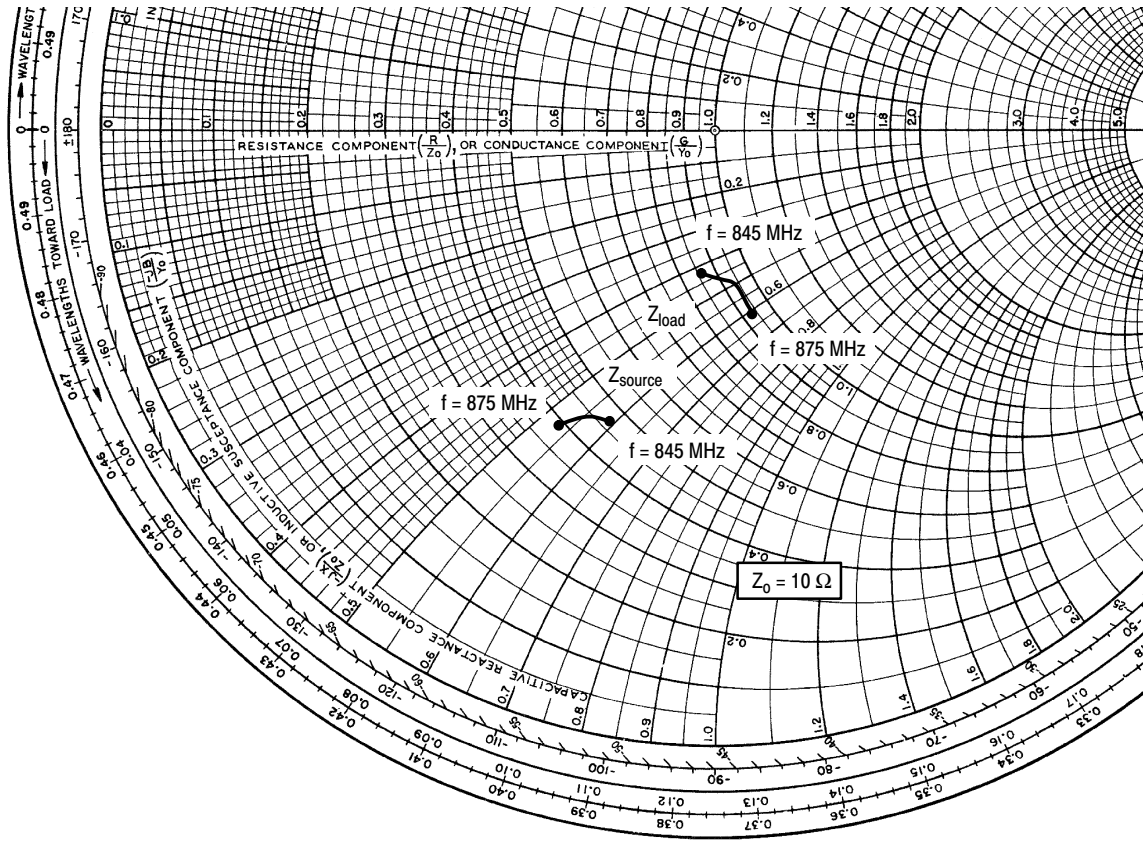

$V_{DD} = 32\text{ V}$ ,  $I_{DQ} = 2 \times 1000\text{ mA}$ ,  $P_{out} = 45\text{ W Avg.}$ , DVBT OFDM

f MHz	Z <sub>source</sub> Ω	Z <sub>load</sub> Ω
845	4.66 - j5.90	8.59 - j4.22
860	4.38 - j5.64	9.36 - j4.95
875	3.93 - j5.33	9.39 - j6.06

Z<sub>source</sub> = Test circuit impedance as measured from gate to gate, balanced configuration.

Z<sub>load</sub> = Test circuit impedance as measured from drain to drain, balanced configuration.


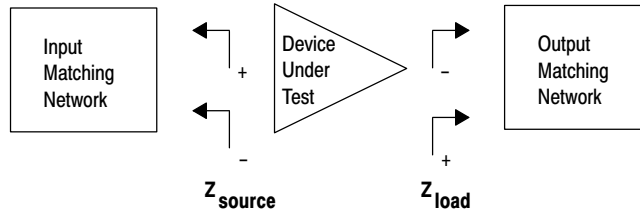


Figure 7. 845-875 MHz Narrowband Series Equivalent Source and Load Impedance


**Table 6. 470—860 MHz Broadband Test Circuit Component Designations and Values**

Part	Description	Part Number	Manufacturer
B1, B2	Ferrite Beads, Surface Mount, 30 $\Omega$ (0603)	2506033007Y0	Fair-Rite
Balun 1, Balun 2	Rogers 3.006, $\epsilon_r = 6.06$ , 1 oz Cu	DS1046	DS Electronics
C1	12 pF Chip Capacitor (0603)	06035J120GBT	AVX / Kyocera
C2, C5	12 pF Chip Capacitors (0805)	08051J120GBT	AVX / Kyocera
C3	3.9 pF Chip Capacitor (0805)	08051J3R9BBT	AVX / Kyocera
C4, C7, C12, C15, C17	8.2 pF Chip Capacitors (0805)	08051J8R2BBT	AVX / Kyocera
C6	3.3 pF Chip Capacitor (0805)	08051J3R3BBT	AVX / Kyocera
C8	0.4 - 2.5 pF Variable Capacitor	27283PC	Gigatronics
C9, C10	3.3 pF Chip Capacitors (0603)	06035J3R3BBT	AVX / Kyocera
C11, C14	10 pF Chip Capacitor (0805)	08051J100GBT	AVX / Kyocera
C13	4.7 pF Chip Capacitor (0805)	08051J4R7BBT	AVX / Kyocera
C16	2.2 pF Chip Capacitor (0603)	06035J2R2BBT	AVX / Kyocera
C18	2.2 pF Chip Capacitor (0805)	08051J2R2BBT	AVX / Kyocera
C19, C20, C21, C22	47 $\mu$ F, 16 V Tantalum Chip Capacitors	TPSD476K016R0150	AVX
C23, C26	2.2 $\mu$ F, 50 V Ceramic Chip Capacitors	C1825C225J5RAC3810	Kemet
C24, C25, C27, C29	0.01 $\mu$ F, 100 V Ceramic Chip Capacitors	C1825C103J1GAC	Kemet
C28, C30	0.56 $\mu$ F, 50 V Ceramic Chip Capacitors	C1825C564J5GAC	Kemet
C31, C32	10 $\mu$ F, 50 V Chip Capacitors	522Z-050/100MTRE	Tecate
C33, C34	470 $\mu$ F, 63 V Electrolytic Capacitors	SME63VB471M12X25LL	United Chemi-Con
L1, L2	15 nH Inductors (0603)	L0603150GGW003	AVX
L3, L4	12 nH Inductors (0603)	0603HC-12NHJBU	CoilCraft
L5, L6	8 nH Coil Inductors	A03T-5	CoilCraft
L7	22 nH Coil Inductor	B07T-5	CoilCraft
L8	18.5 nH Coil Inductor	A05T-5	CoilCraft
R1, R2	12.1 $\Omega$ , 1/16 W, 1% Chip Resistors (0603)		
PCB Gate, PCB Drain	PCB Motherboard w/Integrated Daughterboard, Rogers 3003, $\epsilon_r = 3.03$ , 0.5 oz Cu	DS1047	DS Electronics

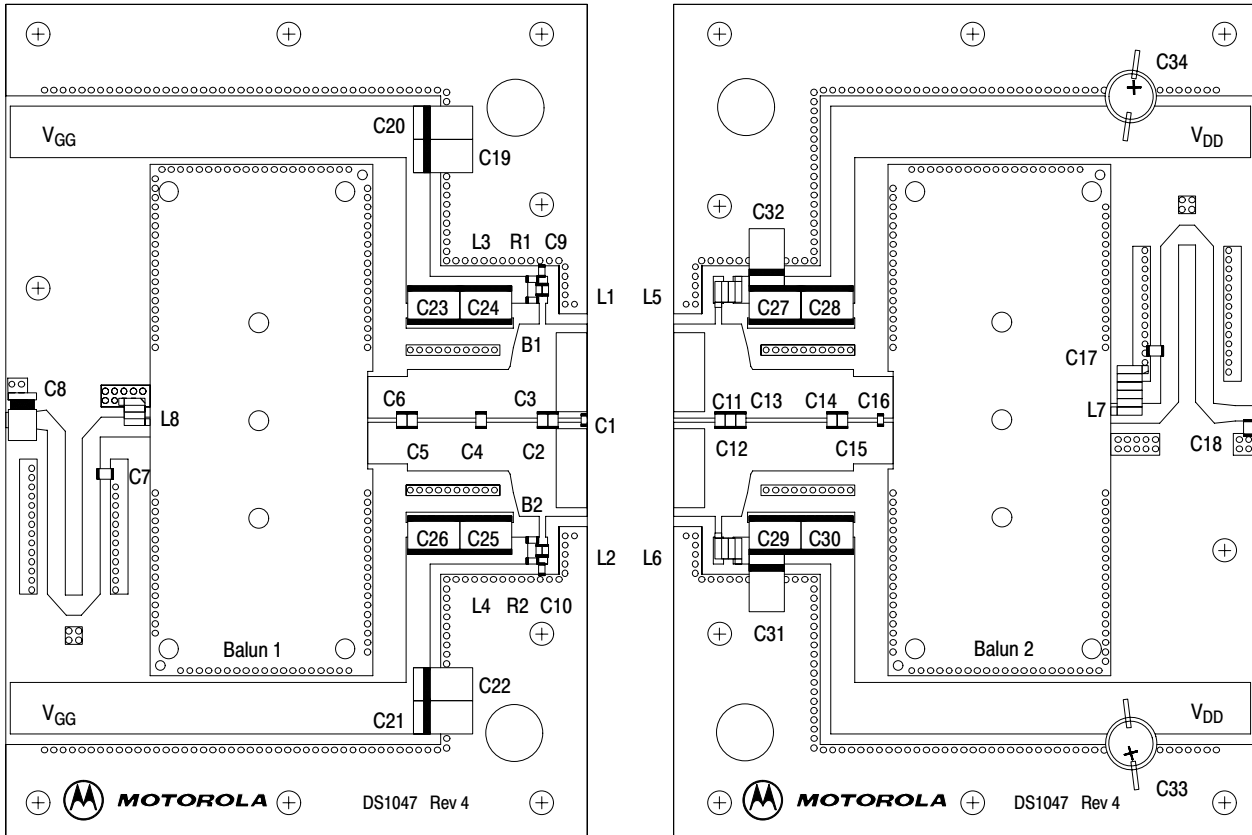

Freescale has begun the transition of marking Printed Circuit Boards (PCBs) with the Freescale Semiconductor signature/logo. PCBs may have either Motorola or Freescale markings during the transition period. These changes will have no impact on form, fit or function of the current product.

**Multilayer Balun Mounting Detail**

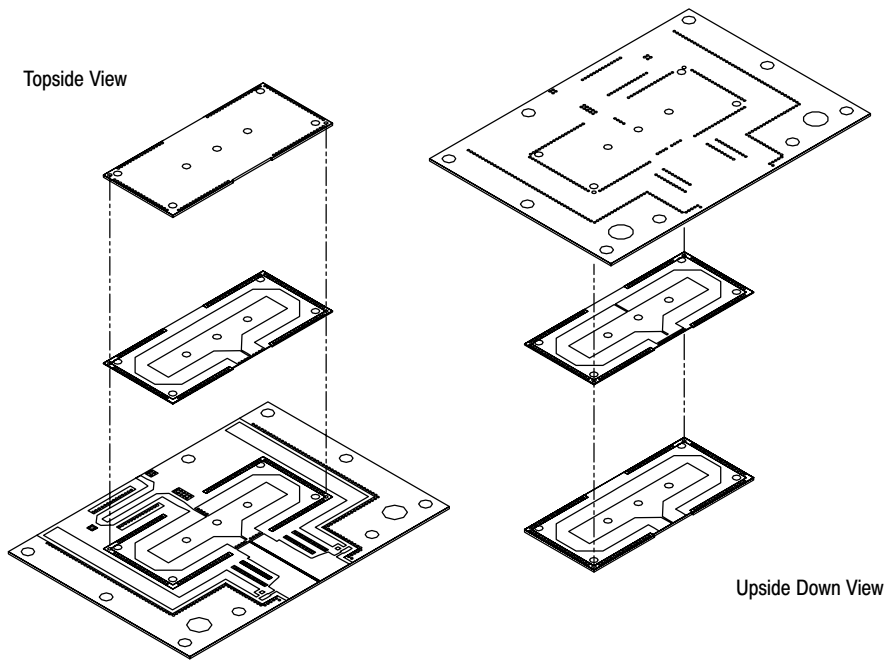

**Figure 8. 470-860 MHz Broadband Test Circuit Component Layout**

TYPICAL DVBT OFDM BROADBAND CHARACTERISTICS

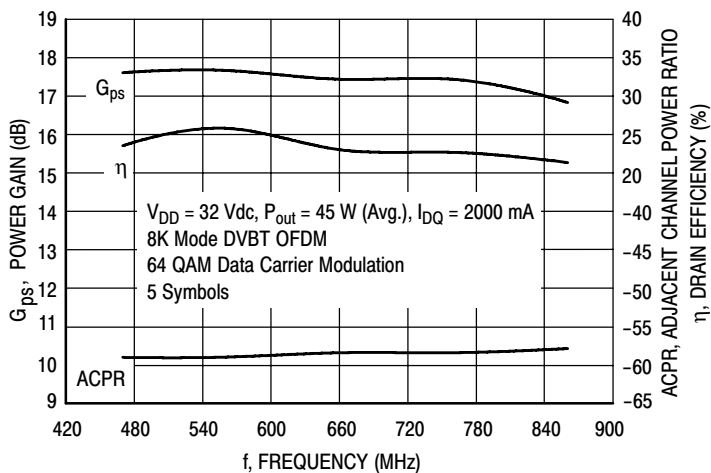


Figure 9. Single-Channel DVBT OFDM Broadband Performance

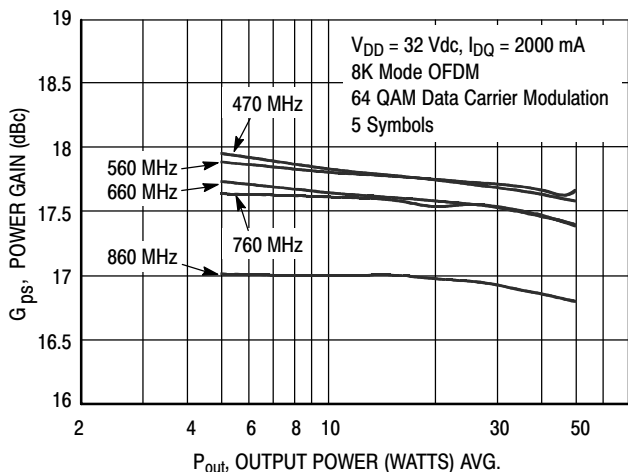


Figure 10. Single-Channel DVBT OFDM Broadband Performance Power Gain versus Output Power

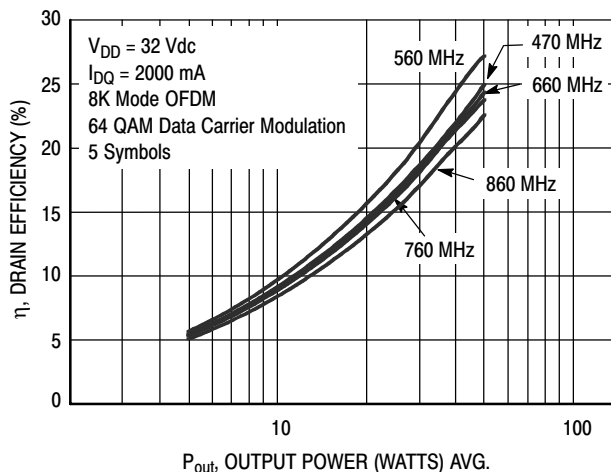


Figure 11. Single-Channel DVBT OFDM Broadband Performance Drain Efficiency versus Output Power

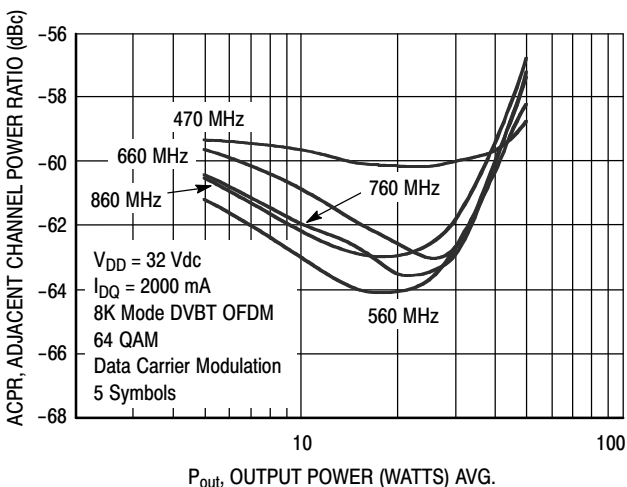


Figure 12. Single-Channel DVBT OFDM Broadband Performance Adjacent Channel Power Ratio versus Output Power


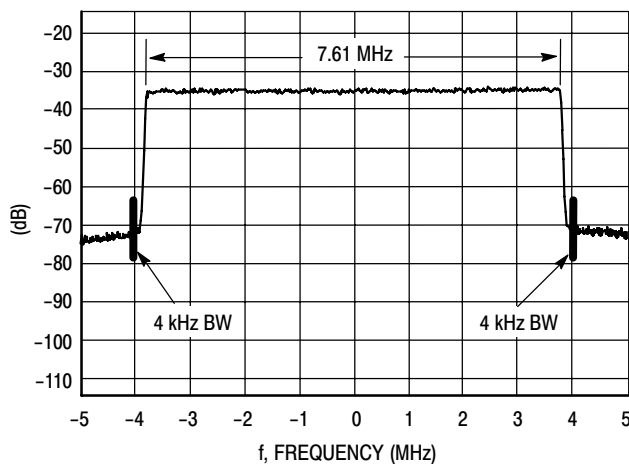


Figure 13. 8K Mode DVBT OFDM Spectrum


ARCHIVE INFORMATION

ARCHIVE INFORMATION


## TYPICAL ATSC 8VSB BROADBAND CHARACTERISTICS

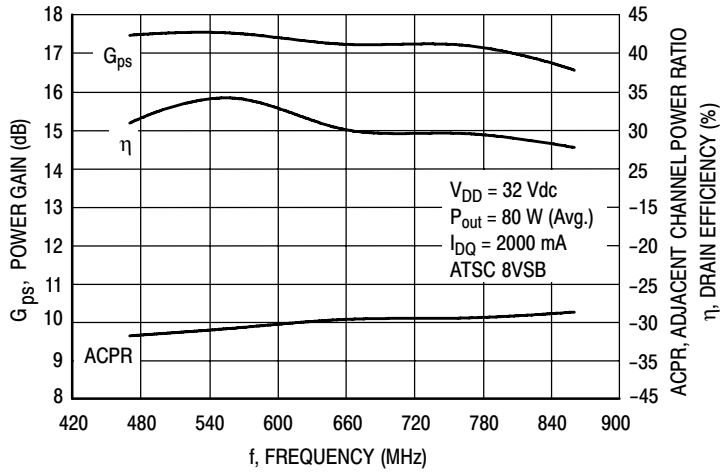


**Figure 14. Single-Channel ATSC 8VSB Broadband Performance**

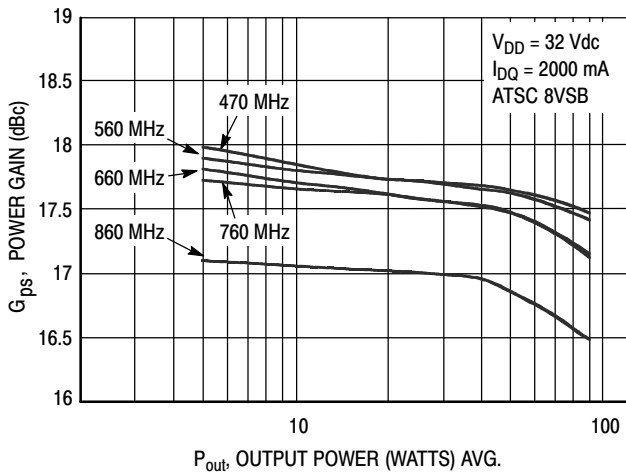


**Figure 15. Single-Channel ATSC 8VSB Broadband Performance Power Gain versus Output Power**

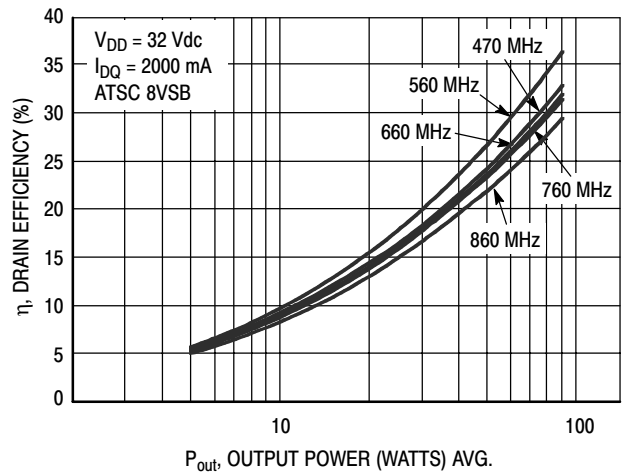


**Figure 16. Single-Channel ATSC 8VSB Broadband Performance Drain Efficiency versus Output Power**

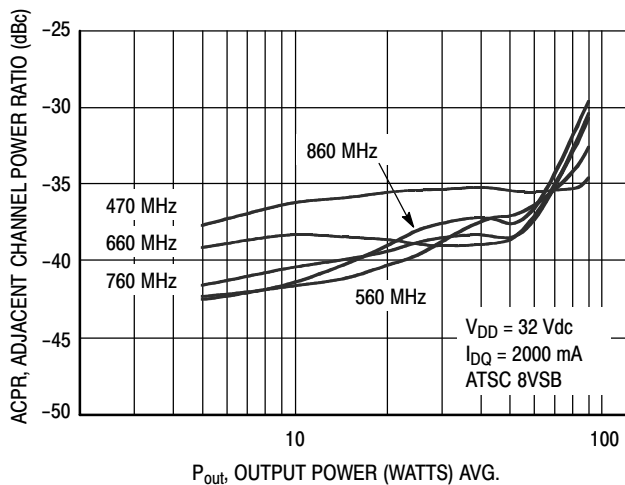

**Figure 17. Single-Channel ATSC 8VSB Broadband Performance Adjacent Channel Power Ratio versus Output Power**

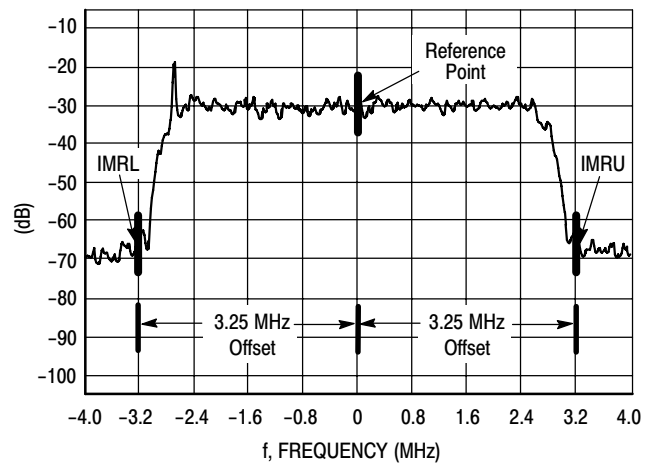

**Figure 18. ATSC 8VSB Spectrum**

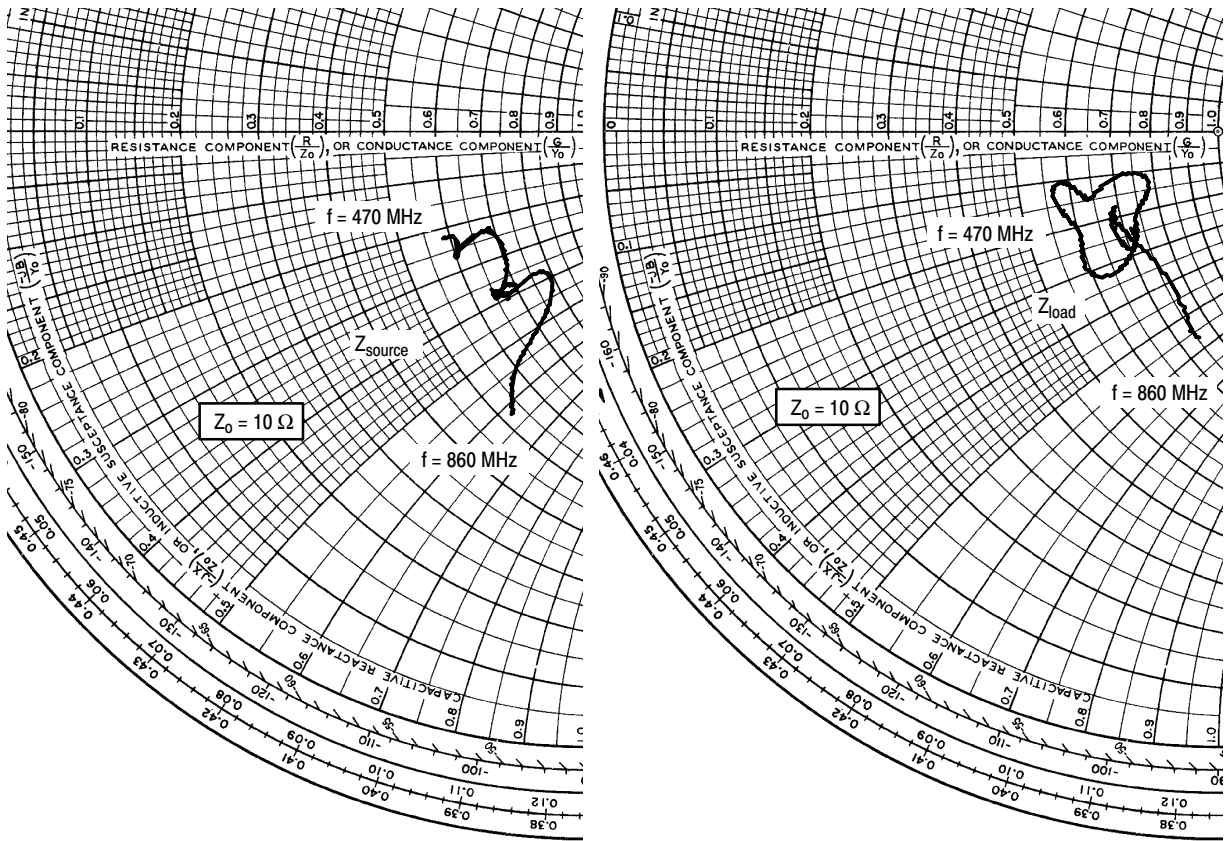

Optimized for  $V_{DD} = 32\text{ V}$ ,  $I_{DQ} = 2 \times 1000\text{ mA}$ ,  $P_{out} = 45\text{ W Avg.}$ , DVBT OFDM

f MHz	$Z_{source}$ $\Omega$	$Z_{load}$ $\Omega$
470	5.79 - j2.40	6.21 - j1.69
560	6.63 - j2.63	5.66 - j1.12
660	6.57 - j4.03	6.76 - j1.00
760	6.67 - j4.55	6.57 - j1.91
860	5.34 - j6.28	7.37 - j5.45

$Z_{source}$  = Test circuit impedance as measured from gate to gate, balanced configuration.

$Z_{load}$  = Test circuit impedance as measured from drain to drain, balanced configuration.

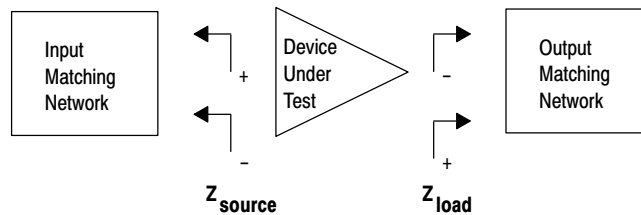


Figure 19. 470—860 MHz Broadband Series Equivalent Source and Load Impedance

# NOTES

ARCHIVE INFORMATION

ARCHIVE INFORMATION

---

# NOTES

ARCHIVE INFORMATION


ARCHIVE INFORMATION

# NOTES

ARCHIVE INFORMATION


ARCHIVE INFORMATION

**PACKAGE DIMENSIONS**

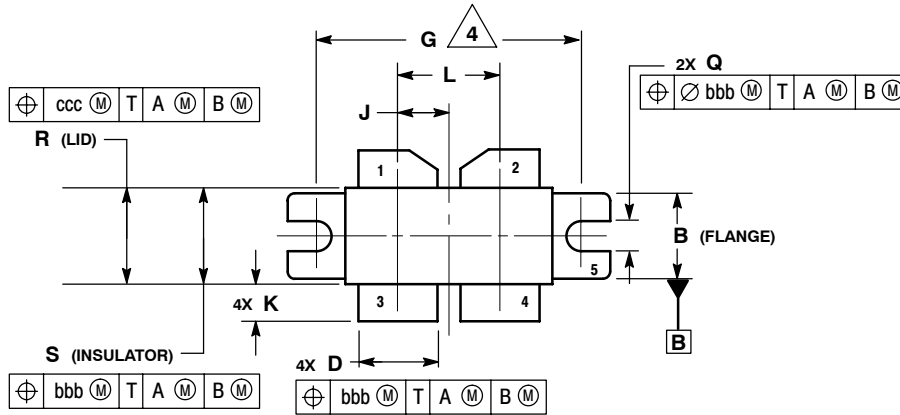

- NOTES:
1. CONTROLLING DIMENSION: INCH.
  2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.
  3. DIMENSION H TO BE MEASURED 0.030 (0.762) AWAY FROM PACKAGE BODY.
  4. RECOMMENDED BOLT CENTER DIMENSION OF 1.140 (28.96) BASED ON 3M SCREW.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	1.335	1.345	33.91	34.16
B	0.380	0.390	9.65	9.91
C	0.180	0.224	4.57	5.69
D	0.325	0.335	8.26	8.51
E	0.060	0.070	1.52	1.78
F	0.004	0.006	0.10	0.15
G	1.100 BSC		27.94 BSC	
H	0.097	0.107	2.46	2.72
J	0.2125 BSC		5.397 BSC	
K	0.135	0.165	3.43	4.19
L	0.425 BSC		10.8 BSC	
M	0.852	0.868	21.64	22.05
N	0.851	0.869	21.62	22.07
Q	0.118	0.138	3.00	3.30
R	0.395	0.405	10.03	10.29
S	0.394	0.406	10.01	10.31
bbb	0.010 REF		0.25 REF	
ccc	0.015 REF		0.38 REF	

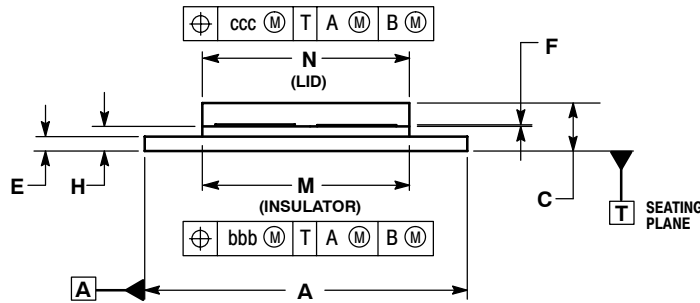

- STYLE 1:  
 PIN 1. DRAIN  
 2. DRAIN  
 3. GATE  
 4. GATE  
 5. SOURCE

**CASE 375G-04  
 ISSUE E  
 NI-860C3**

**How to Reach Us:**

**Home Page:**  
www.freescale.com

**E-mail:**  
support@freescale.com

**USA/Europe or Locations Not Listed:**  
Freescale Semiconductor  
Technical Information Center, CH370  
1300 N. Alma School Road  
Chandler, Arizona 85224  
+1-800-521-6274 or +1-480-768-2130  
support@freescale.com

**Europe, Middle East, and Africa:**  
Freescale Halbleiter Deutschland GmbH  
Technical Information Center  
Schatzbogen 7  
81829 Muenchen, Germany  
+44 1296 380 456 (English)  
+46 8 52200080 (English)  
+49 89 92103 559 (German)  
+33 1 69 35 48 48 (French)  
support@freescale.com

**Japan:**  
Freescale Semiconductor Japan Ltd.  
Headquarters  
ARCO Tower 15F  
1-8-1, Shimo-Meguro, Meguro-ku,  
Tokyo 153-0064  
Japan  
0120 191014 or +81 3 5437 9125  
support.japan@freescale.com

**Asia/Pacific:**  
Freescale Semiconductor Hong Kong Ltd.  
Technical Information Center  
2 Dai King Street  
Tai Po Industrial Estate  
Tai Po, N.T., Hong Kong  
+800 2666 8080  
support.asia@freescale.com

**For Literature Requests Only:**  
Freescale Semiconductor Literature Distribution Center  
P.O. Box 5405  
Denver, Colorado 80217  
1-800-441-2447 or 303-675-2140  
Fax: 303-675-2150  
LDCForFreescaleSemiconductor@hibbertgroup.com

Information in this document is provided solely to enable system and software implementers to use Freescale Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescale Semiconductor reserves the right to make changes without further notice to any products herein. Freescale Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Freescale Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. Freescale Semiconductor does not convey any license under its patent rights nor the rights of others. Freescale Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescale Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescale Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescale Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescale Semiconductor was negligent regarding the design or manufacture of the part.

Freescale™ and the Freescale logo are trademarks of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners.  
© Freescale Semiconductor, Inc. 2004, 2006. All rights reserved.