



2N1671 – 2N1671A – 2N1671B

PN BAR-TYPE SILICON UNIJUNCTION TRANSISTORS

The 2N1671, 2N1671A AND 2N1671B are mounted in TO-5 metal package.
They are designed for medium power switching, oscillator and pulse timing circuit.

- Highly Stable Negative Resistance and Firing Voltage
- Low Firing Current
- High Pulse Current Capabilities
- Simplified Circuit Design

Compliance to RoHS.

ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings		Value	Unit
V_{B1E}	Base 1 – Emitter Reverse Voltage	2N1671	30	V
		2N1671A		
		2N1671B		
V_{B2E}	Base 2 – Emitter Reverse Voltage	2N1671	30	V
		2N1671A		
		2N1671B		
V_{B1B2}	Interbase Voltage	2N1671	35	V
		2N1671A		
		2N1671B		
I_{FRMS}	RMS Emitter Current	2N1671	50	mA
		2N1671A		
		2N1671B		
I_{EM}	Emitter Peak Current	2N1671	2	A
		2N1671A		
		2N1671B		
P_{TOT}	Total Power Dissipation	2N1671	450	mW
		2N1671A		
		2N1671B		
T_J	Maximum Junction	2N1671	150	°C
		2N1671A		
		2N1671B		
T_{STG}	Storage Temperature Range	2N1671	-55 to +150	
		2N1671A		
		2N1671B		



2N1671 – 2N1671A – 2N1671B

ELECTRICAL CHARACTERISTICS


TC=25°C unless otherwise noted

Symbol	Ratings	Test Condition(s)		Min	Typ	Max	Unit
I_{EB2O}	Emitter Reverse Current	$V_{B2E}=30\text{ V}$, $I_{B1}=0$	2N1671	-	-	-12	μA
			2N1671A	-	-	-12	
			2N1671B	-	-	-0.2	
$V_{EB1(sat)}$	Emitter saturation Voltage	$V_{B2B1}=10\text{ V}$, $I_E=50\text{ mA}$	2N1671	-	-	5	V
			2N1671A				
			2N1671B				
R_{BBO}	Interbase Resistance	$V_{B2B1}=3\text{ V}$, $I_E=0$	2N1671	4.7	-	9.1	$\text{K}\Omega$
			2N1671A				
			2N1671B				
η	Intrinsic stand-off ratio	$V_{B2B1}=10\text{ V}$	2N1671	0.47	-	0.62	-
			2N1671A				
			2N1671B				
I_v	Valley Current	$V_{B2B1}=10\text{ V}$ $R_{B2}=100\ \Omega$	2N1671	-	-	8	mA
			2N1671A				
			2N1671B				
I_p	Peak Current	$V_{B2B1}=25\text{ V}$	2N1671	-	-	25	μA
			2N1671A	-	-	25	
			2N1671B	-	-	6	



2N1671 – 2N1671A – 2N1671B

MECHANICAL DATA CASE TO-5

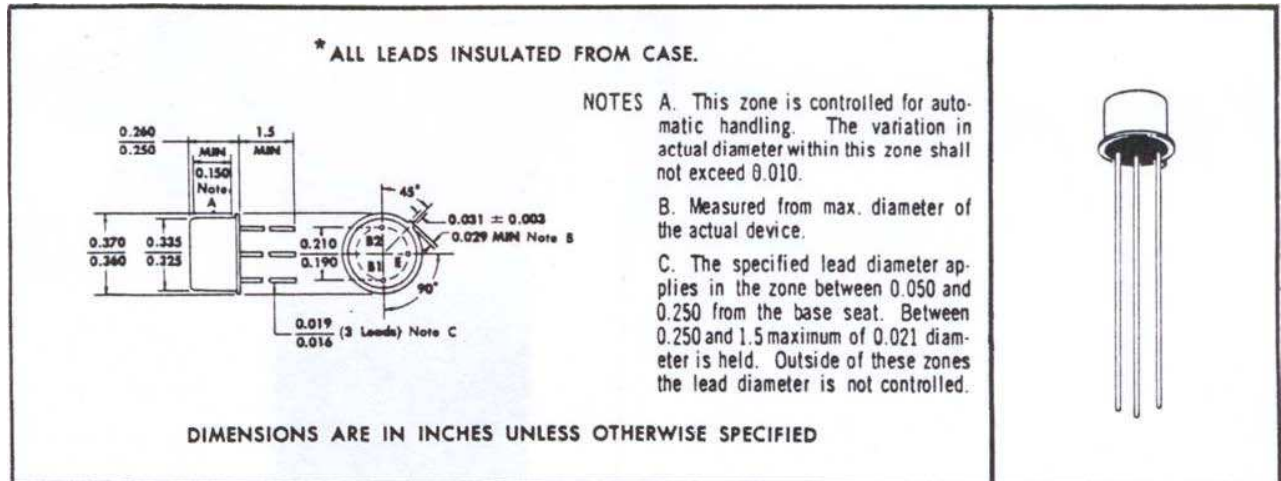

Revised October 2012

Information furnished is believed to be accurate and reliable. However, Comset Semiconductors assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Data are subject to change without notice. Comset Semiconductors makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Comset Semiconductors assume any liability arising out of the application or use of any product and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Comset Semiconductors' products are not authorized for use as critical components in life support devices or systems.

www.comsetsemi.com

info@comsetsemi.com

COMSET SEMICONDUCTORS

3 | 3