


PRELIMINARY SPEC

***Application**

- 1.Copiers,printers and Fax Machines.
- 2.VCRs and CD players.
- 3.Various position detection sensor.

***Dimensions**

Note:All units are in millimeters unless otherwise indicated.

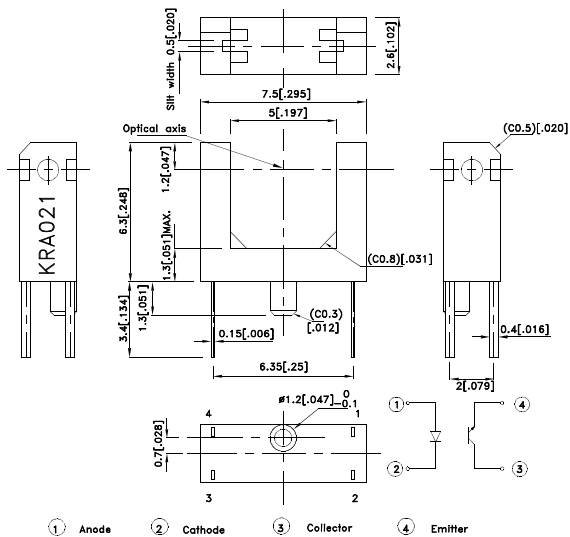

Unless otherwise, the tolerances are $\pm 0.15\text{mm}$.

***Features**

- 1.Compact package.
- 2.High sensing accuracy(Slit width:0.5mm).
- 3.Printed wiring board direct mounting type(with a locating pin).
- 3.Gap between light emitter and detector:5mm.
- 4.Compliant with European RoHS directives.
- 5.RoHS compliant.

***Absolute Maximum Ratings (Ta=25°C)**

Parameter		Symbol	Rating	Unit
Input	Forward current[1]	IF	30	mA
	Reverse voltage	VR	5	V
	Power dissipation	Pd	35	mW
	Peak Forward Current [2]	IFP	100	mA
Output	Collector-emitter voltage	VCEO	35	V
	Emitter-collector voltage	VECO	5	V
	Collector current	IC	50	mA
	Collector power dissipation	PC	75	mW
Operating temperature		Topr	-30~+85	°C
Storage temperature		Tstg	-40~+100	°C
Soldering temperature(5s) [3]		Tsol	260	°C

Notes:

- 1.Refer to the temperature rating chart if the ambient temperature exceeds 25°C.
- 2.Duty:1/100,Pulse Width:0.1mS.
- 3.At the location of 1.5mm from the package bottom.

***Electrical / Optical Characteristics at Ta=25°C**

Parameter	Symbol	Value			Conditions	
		Min.	Typ.	Max.		
Input	Forward voltage	VF	-	1.15V	1.40V	IF=10mA
	Reverse current	IR	-	-	10μA	VR=5V
	Peak Wavelength	λp	-	940nm	-	-
Output	Collector current	IC/IF	2.5%	-	50%	IF=10mA,VCE=2V
	Collector dark current	ID	-	-	100nA	VCE =24V, IF=0
	Collector-emitter saturation voltage	VCE(sat)	-	0.1V	0.4V	IC=0.25mA, IF=20mA
	Peak spectral sensitivity wavelength	λp	-	920nm	-	-
Rise time	tr	-	15μsec	50μsec	VCC=5V, RL=1KΩ IC=1mA	
Fall time	tf	-	15μsec	50μsec		



Fig.1 Forward Current vs. Forward Voltage




Fig.2 Collector Current vs. Forward Current




Fig.3 Collector Current vs. Ambient Temperature

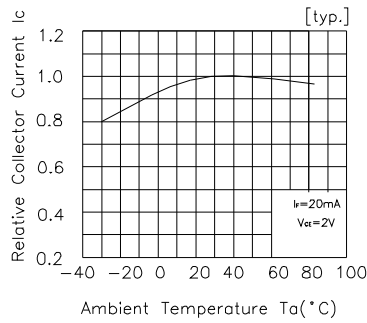


Fig.4 Collector-Emitter Saturation Voltage vs. Ambient Temperature

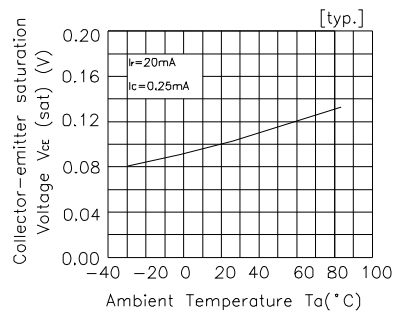


Fig.5 Forward Current vs. Collector Dissipation Temperature Rating

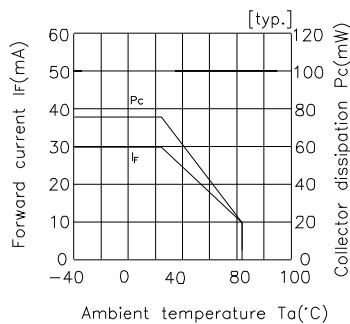


Fig.6 Forward Current vs. Collector-Emitter Voltage

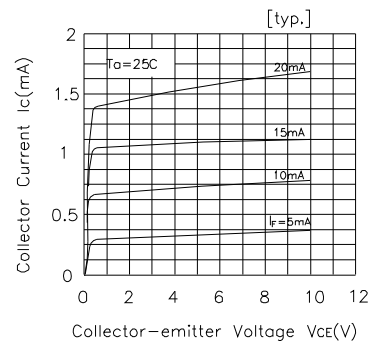


Fig.7 Relative Collector Current vs. Shield Distance(1)




Fig.8 Relative Collector Current vs. Shield Distance(2)



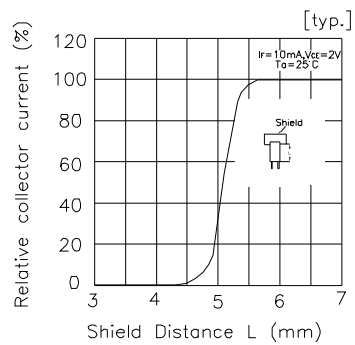


Fig.9 Response Time vs Load Resistance

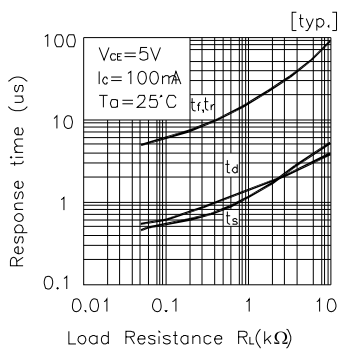


Test Circuit for Response Time

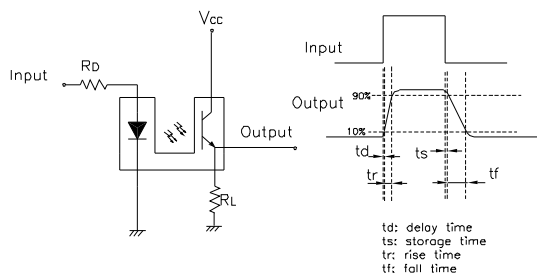

KRA021

Wave Soldering Profile For Lead-free Through-hole LED.

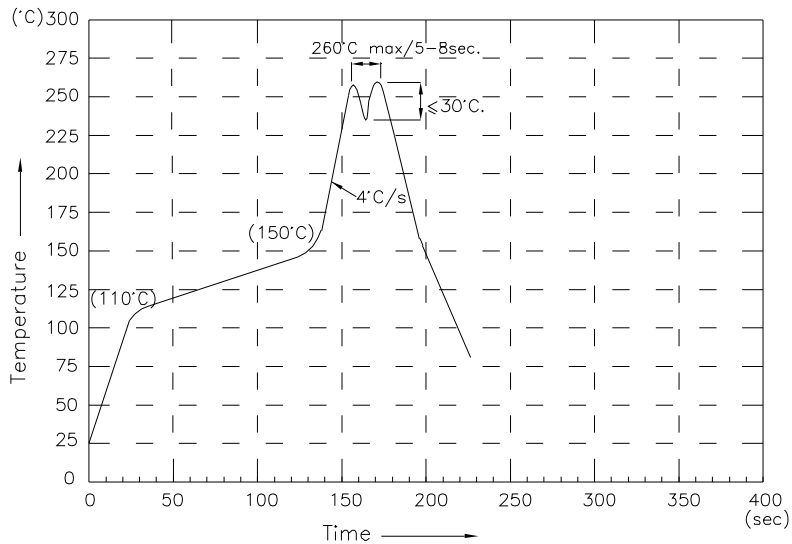



NOTES:

- 1.Recommend the wave temperature 245°C~260°C.The maximum soldering temperature should be less than 260°C.
- 2.Do not apply stress on epoxy resins when temperature is over 85 degree°C.
- 3.The soldering profile apply to the lead free soldering (Sn/Cu/Ag alloy).
- 4.No more than once.

PACKING & LABEL SPECIFICATIONS

KRA021

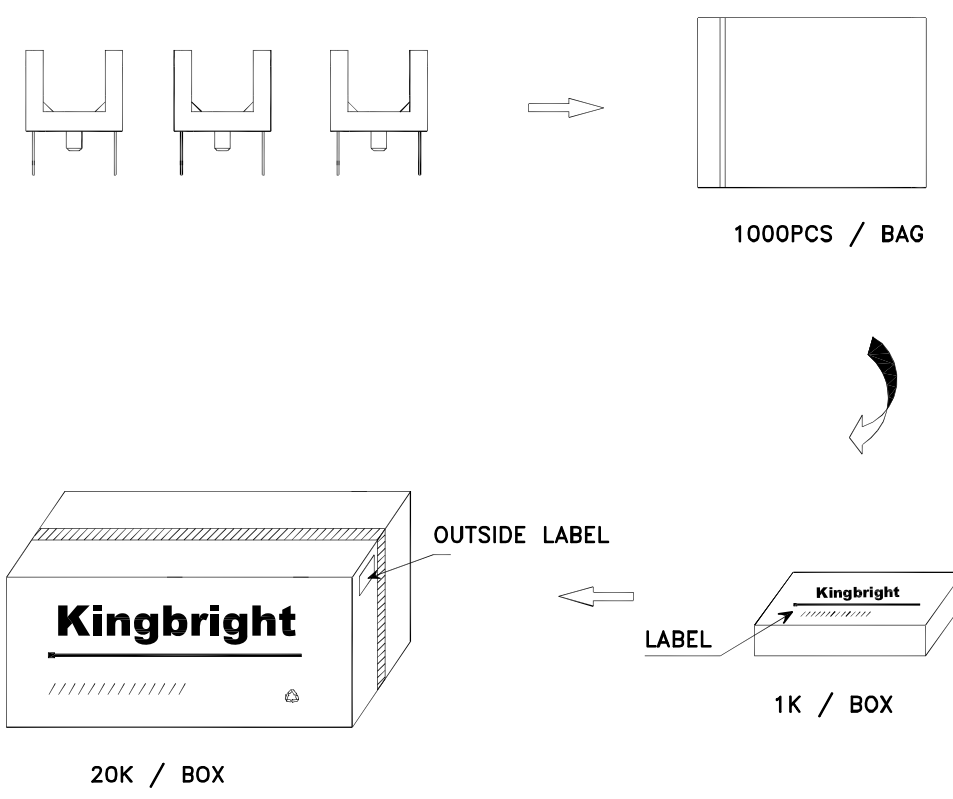

<h1>Kingbright</h1>	
P/NO: KRA021	
QTY: 1000 pcs	Q.C. Q C XX XX XXXX PASSED
S/N: XXXX	
CODE: XXX	
LOT NO:	
 xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx	
RoHS Compliant	