


## SUBMINIATURE , HIGH SENSITIVITY PHOTOINTERRUPTER

### \*Features

- 1.Compact and thin.
- 2.Invisible light cut-off type.
- 3.High sensitivity.
- 4.Side irradiance.
- 5.Package: 3000pcs/Reel.
- 6.Moisture sensitivity level : level 4.
- 7.RoHS compliant.

### \*Applications

Cassette tape recorders,VCRs toys.  
Various microcomputerized control equipment.

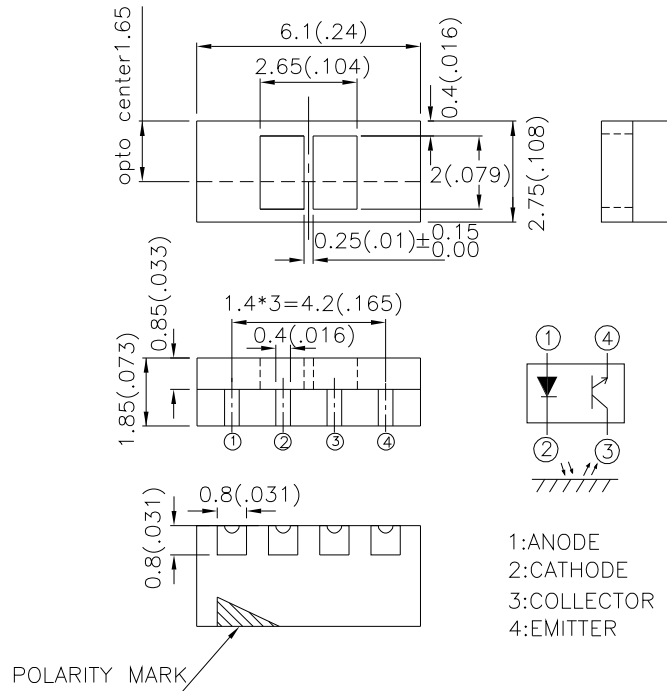

UNIT : MM[INCH]  
TOLERANCE :  $\pm 0.25[\pm 0.01]$  UNLESS OTHERWISE NOTED.

### \*Absolute Maximum Ratings (TA=25°C)

Parameter		Symbol	Rating	Unit
Input	Forward Current	IF	30	mA
	Reverse Voltage	VR	5	V
	Power Dissipation	Pd	37.5	mW
	Peak Forward Current (Pulse Width $\leq 100\mu\text{S}$ , Duty Cycle=1%)	IFP	1	A
Output	Collector-emitter voltage	VCEO	30	V
	Emitter-Collector voltage	VECO	5	V
	Collector current	IC	20	mA
	Collector Power Dissipation	PC	75	mW
Operating temperature		Topr	-25~+50	°C
Storage temperature		Tstg	-25~+50	°C
Soldering temperature (1/16 inch from body for 5 seconds)		Tsol	260	°C



## Electrical / Optical Characteristics at TA=25°C

Parameter		Symbol	Conditions	Min.	Typ.	Max.	Unit
Input	Forward voltage	$V_F$	$I_F=20mA$	1.0	1.2	1.5	V
	Reverse current	$I_R$	$V_R=5V$	-	-	10	$\mu A$
	Peak Wavelength	$\lambda_p$	$I_F=20mA$	-	940	-	nm
Output	Collector dark current	$I_{CEO}$	$V_{CE}=20V$	-	$10^{-9}$	$10^{-7}$	A
Viewing Angle		$\theta$	-	-	90	-	°
Transfer Characteristics	Collector-emitter saturation voltage	$V_{CE(SAT)}$	$I_C=0.1mA, I_F=20mA$	-	0.1	0.4	V
	Collector current [1]	$I_C$	$V_{CE}=5V, I_F=20mA$	10	-	300	$\mu A$
	Leak current [2]	$I_{LEAK}$	$V_{CE}=5V, I_F=20mA$	-	-	5	$\mu A$
	Response time	Rise time	$T_R$	$V_{CE}=2V, I_C=100\mu A, R_L=1K\Omega, d=3.8mm$	-	20	-
Fall time		$T_F$		-	20	-	$\mu S$

**Notes:**

- The condition and arrangement of the reflective object are shown below. Fig.1, Fig.2, Fig.3, Fig.4, Fig.5 and Fig.9 in the same condition.
- Without reflective object.


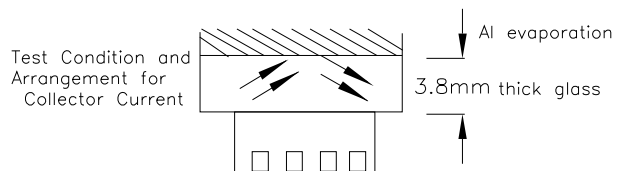


Fig.1 Forward Current Vs. Forward Voltage




Fig.2 Collector Current Vs. Forward Current




Fig.3 Response Time Vs. Load Resistance

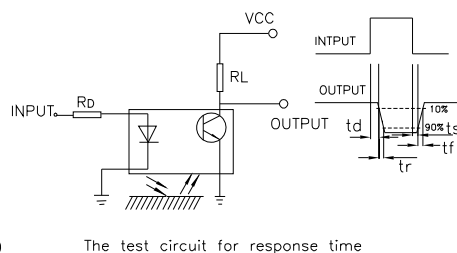




Fig.4 Relative Collector Current Vs. Ambient Temperature



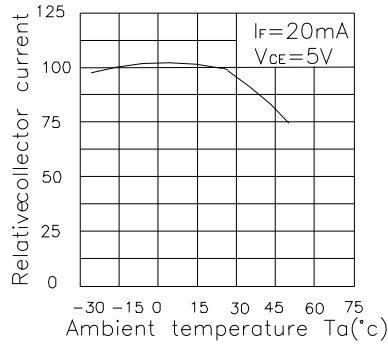



Fig.5 Collector Current Vs. Collector-Emitter Voltage

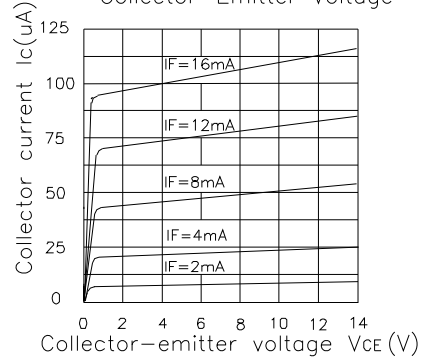

\*Fig.6 Relative Collector Current Vs. Distance Between Sensor and Al Evaporation Glass

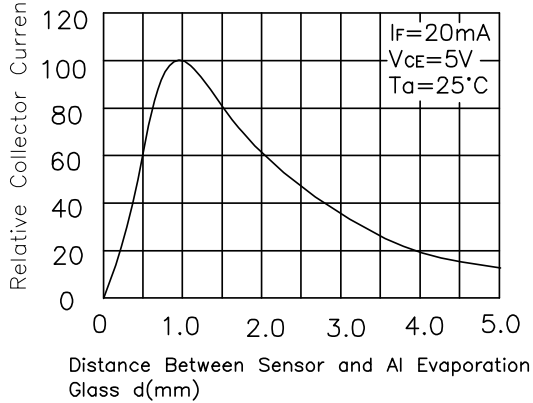

\*Fig.7 Relative Collector Current Vs Card Moving Distance (1)

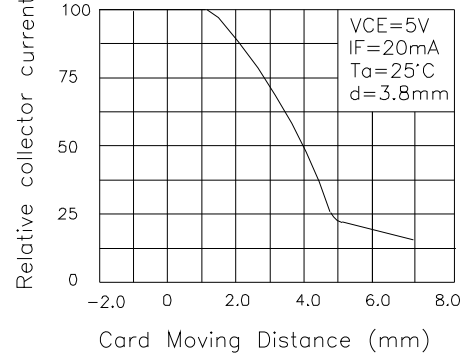

\*Fig.8 Relative Collector Current Vs. Card Moving Distance (2)





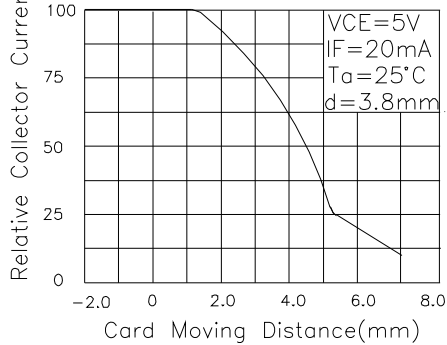



Fig.9 Collector Dark Current Vs. Ambient Temperature

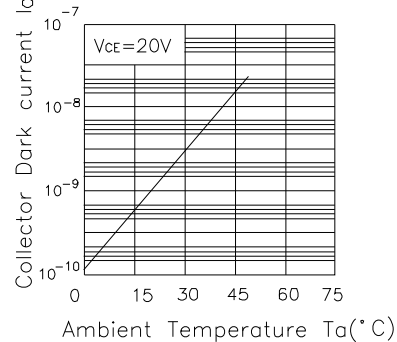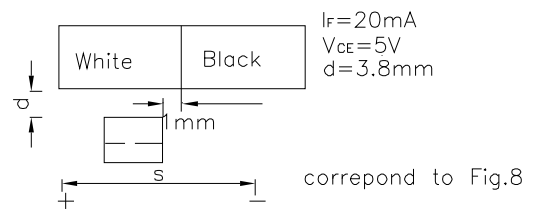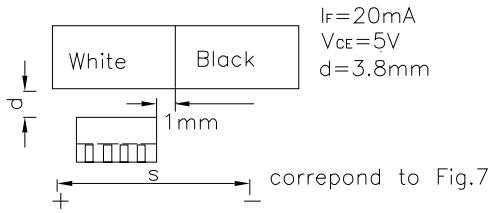


\*Note:Test condition for distance

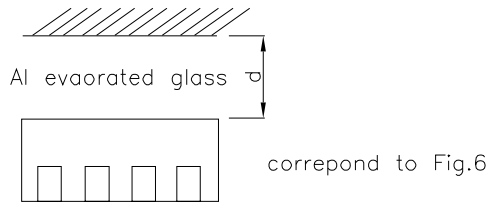


RECOMMENDED SOLDERING PATTERN

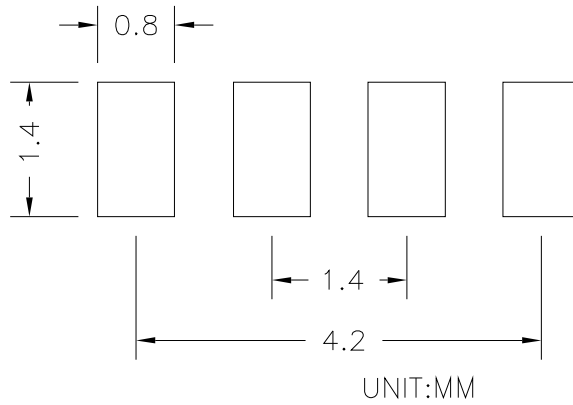

Tape Specifications  
 (Units : mm)

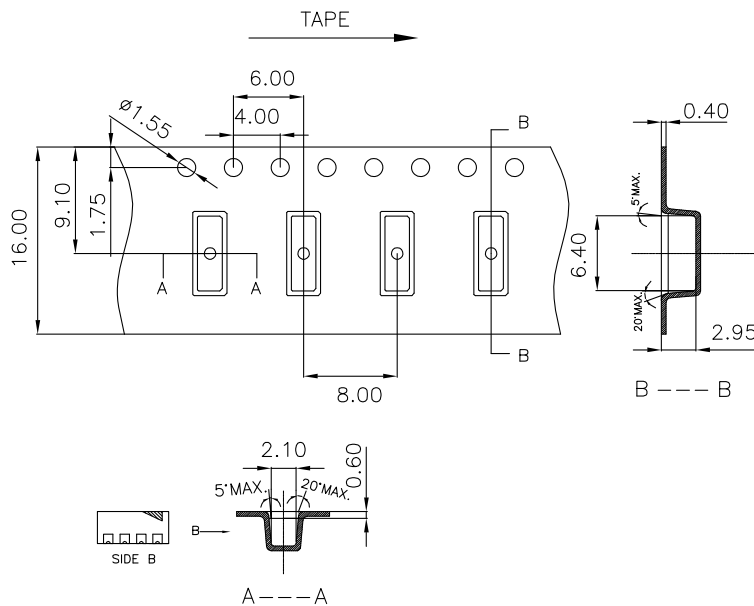

Reflow Soldering Profile For Lead-free SMT Process.


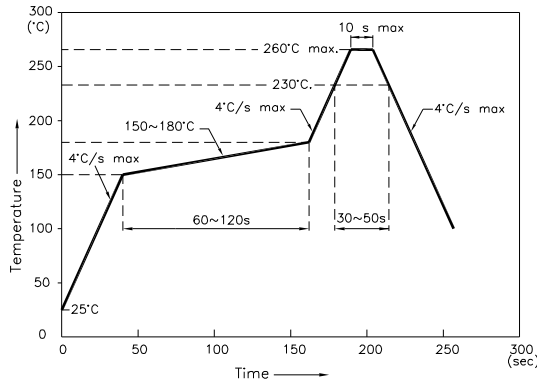



NOTES:

1. We recommend the reflow temperature 245°C(+/-5°C). The maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.

PACKING & LABEL SPECIFICATIONS

KRC011

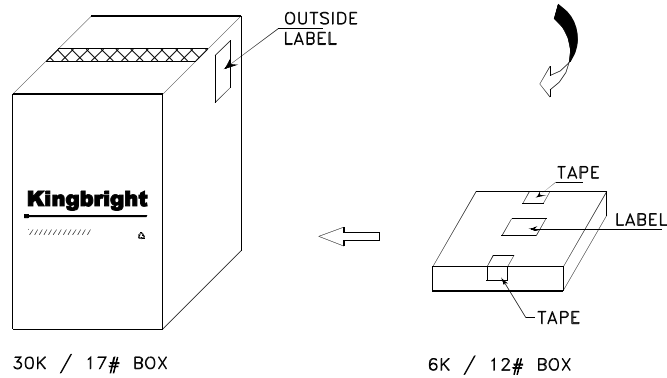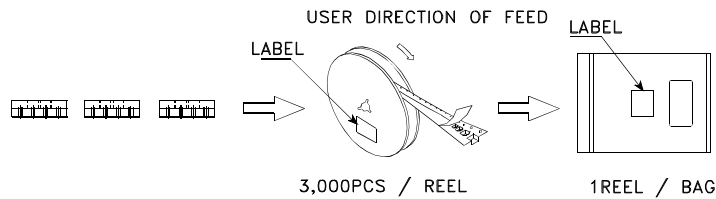

<b>Kingbright</b>	
P/NO: KRCxxx	
QTY: 3,000 pcs	Q.C. <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">Q.C. XX XX XXXX PASSED</span>
S/N: XXXX	
CODE: XXX	
LOT NO:	
 xxxxxxxxxxxxxxxxxxxxxxxxxxxx	
RoHS Compliant	