

Part Number: PSA23-11SEKWA

Super Bright Orange


Features

- 2.3 inch character height.
- Low current operation.
- High contrast and light output.
- Easy mounting on P.C. boards or sockets.
- Mechanically rugged.
- Standard : gray face, white segment.
- RoHS compliant.

Description

The Super Bright Orange device is made with AlGaInP (on GaAs substrate) light emitting diode chip.

Package Dimensions& Internal Circuit Diagram

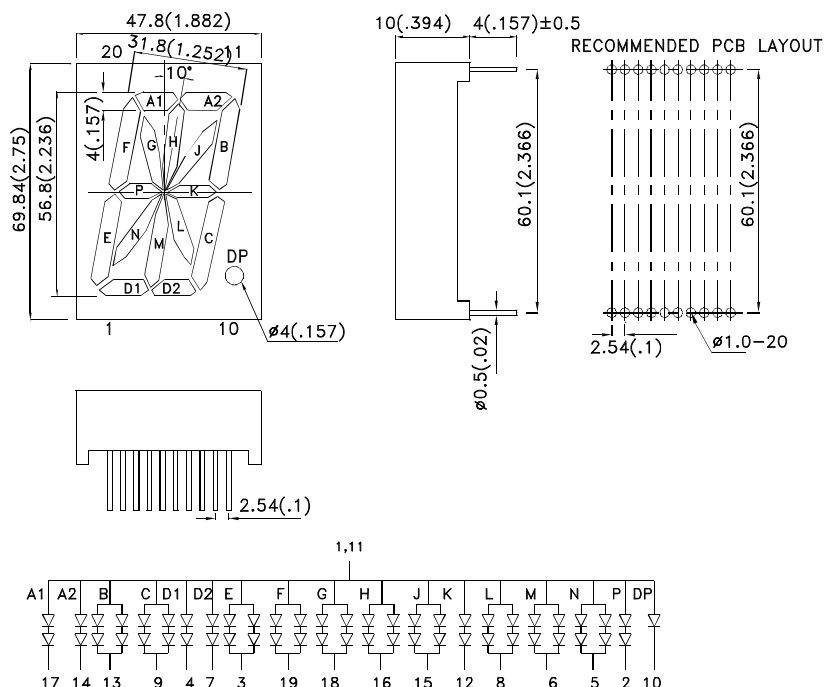

Notes:

1. All dimensions are in millimeters (inches), Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
2. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.



Selection Guide

Part No.	Dice	Lens Type	Iv (ucd) [1] @ 10mA		Description
			Min.	Typ.	
PSA23-11SEKWA	Super Bright Orange (AlGaInP)	White Diffused	88000	240000	Common Anode, Rt. Hand Decimal.

Note:

1. Luminous intensity/ luminous Flux: +/-15%.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter		Device	Typ.	Max.	Units	Test Conditions
λ peak	Peak Wavelength		Super Bright Orange	610		nm	I _F =20mA
λ D[1]	Dominant Wavelength		Super Bright Orange	601		nm	I _F =20mA
$\Delta\lambda$ 1/2	Spectral Line Half-width		Super Bright Orange	29		nm	I _F =20mA
C	Capacitance		Super Bright Orange	15		pF	V _F =0V;f=1MHz
V _F [2]	Forward Voltage	A1,A2,D1,D2,P,K	Super Bright Orange	4.2	5.0	V	I _F =20mA
		B,C,E,F,G,H,J,L,M,N					
		DP		2.1	2.5		
I _R	Reverse Current	A1,A2,D1,D2,P,K	Super Bright Orange		10	uA	V _R = 10V V _R = 10V V _R = 5V
		B,C,E,F,G,H,J,L,M,N			20		
		DP			10		

Notes:

1.Wavelength: +/-1nm.

2. Forward Voltage: +/-0.1V.


Absolute Maximum Ratings at TA=25°C

Parameter		Super Bright Orange	Units
Power dissipation	A1,A2,D1,D2,P,K	150	mW
	B,C,E,F,G,H,J,L,M,N	300	
	DP	75	
DC Forward Current	A1,A2,D1,D2,P,K	30	mA
	B,C,E,F,G,H,J,L,M,N	60	
	DP	30	
Peak Forward Current [1]	A1,A2,D1,D2,P,K	195	mA
	B,C,E,F,G,H,J,L,M,N	390	
	DP	195	
Reverse Voltage	A1,A2,D1,D2,P,K	10	V
	B,C,E,F,G,H,J,L,M,N	10	
	DP	5	
Operating / Storage Temperature		-40°C To +85°C	
Lead Solder Temperature [2]		260°C For 3-5 Seconds	

Notes:





1. 1/10 Duty Cycle, 0.1ms Pulse Width.

2. 2mm below package base.




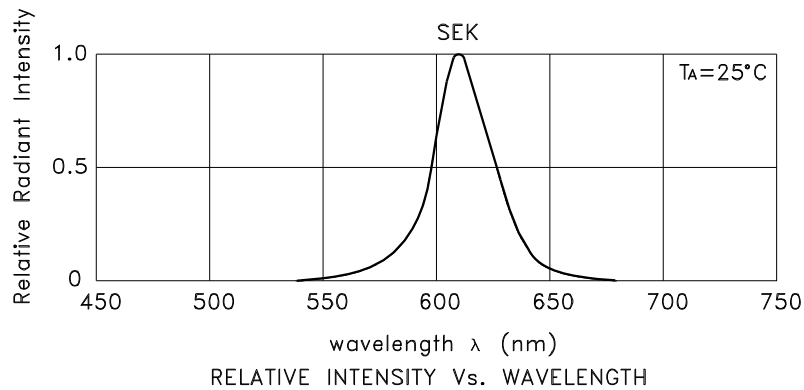


Super Bright Orange





PSA23-11SEKWA

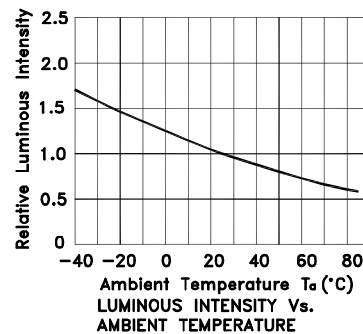

Note: the curves are on the segment a1,a2,d1,d2,p,k.

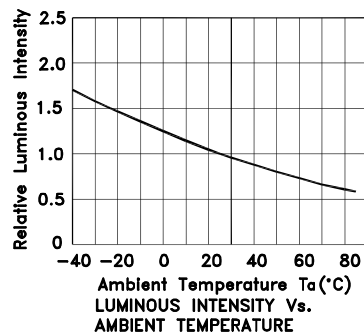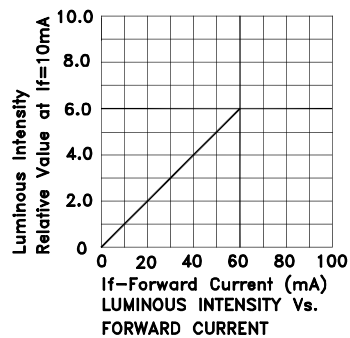


Note:the curves are on the segment b,c,e,f,g,h,j,l,m,n.

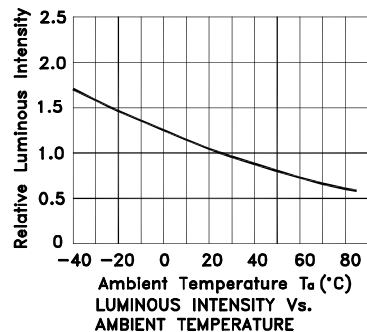

Note: the curves are on the DP.

PACKING & LABEL SPECIFICATIONS

PSA23-11SEKWA

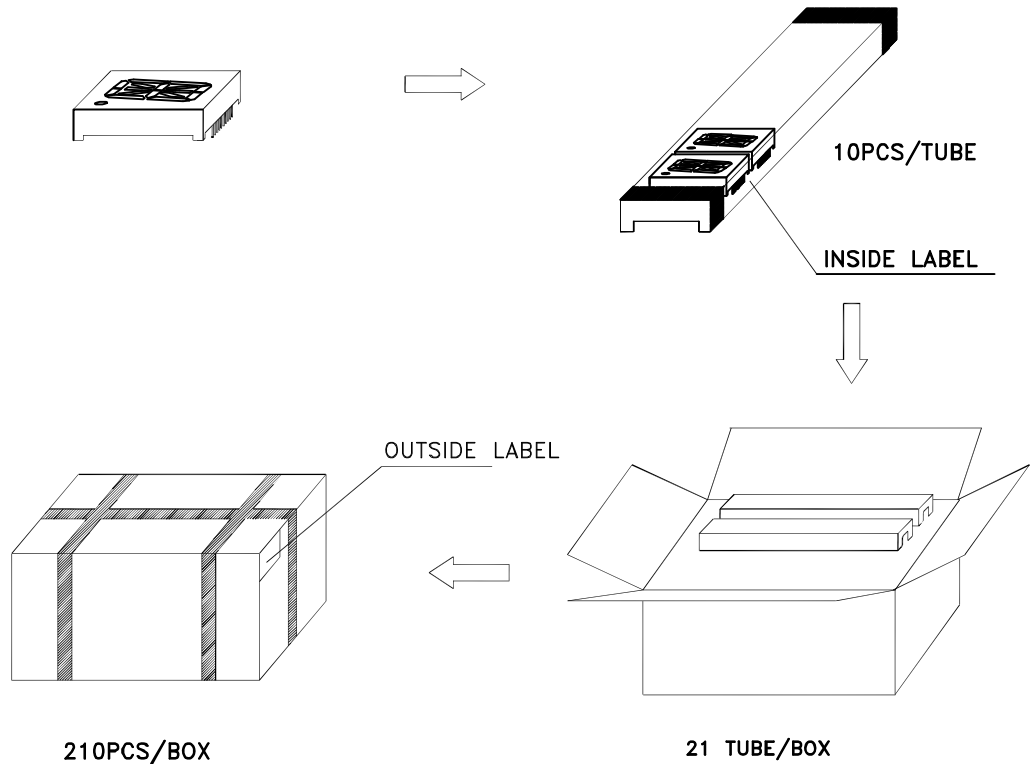

Inside Label On IC-tube

Kingbright	TYPE: PSx23-11xxx	CODE: xx	PASSED xx xx xx FQCX	Date
	QTY: 10 PCS			
XXXXXXXXXX-XXXX		RoHS Compliant		Number OF FQC
LOT NO.				

Outside Label On Box

XXXXXX	XXXXXXXXXX	
PSx23-11xxx	Bin Code	Number OF QA
210 PCS	XX	Date
QAx xx xx xx PASSED		
RoHS Compliant		