

Fuseholder Open Design, 10.3 x 38 mm, Screw Clamp



500 VAC · 3.6W/30A



NNO

Description

- Screw or rivet fastening

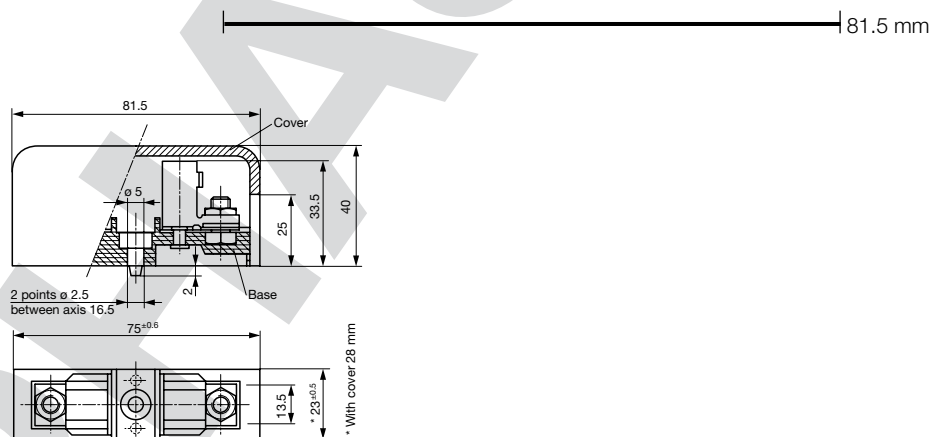
ReferencesThis type is Phase-out without alternate type
Last order date: 20.02.2012**Weblinks**

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

Fuse-Link	10.3 x 38 mm
Mounting	Screw
Mounting	Screw or Rivet
Terminal	Screw clamps
Rated Voltage	500VAC
Rated Current	30A
Rated Power Acceptance IEC	3.6W / 30A @ Ta 23 °C
Degree of Protection	IP 00 / IP 20
Protection Class	Suitable for appliances with protection class I or II acc. to IEC 61140
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/56 acc. to IEC 60068-1
Material: Socket	Thermoset, black
Unit Weight (Socket/Cap)	60 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Dielectric strength, Current, HB7

Soldering Methods	Wave
Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11

Dimensions**Variants**

Holder	Degree of Protection	Reference	Order Number
●	IP 00	23351B	7082.1110

Packaging Unit Bulk (100 pcs.)

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments.