

Cover for Holder OGD, OGD-SMD



4W/10A

**Standards**

- IEC 60127-6
- UL 4248-1 / UL 512
- CSA C22.2 no. 39

Approvals

- VDE Certificate Number: 4008993
- UL File Number: E39328

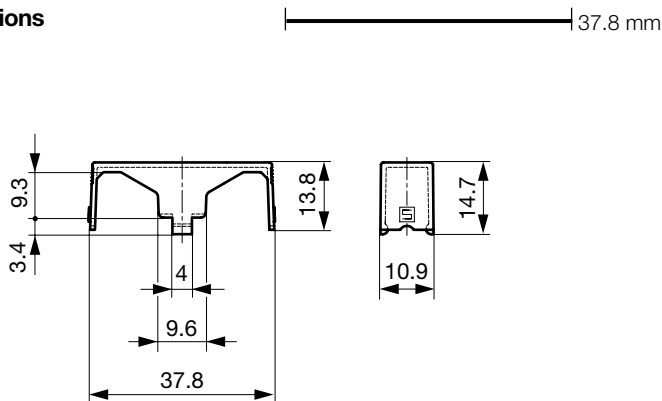
ReferencesFits to type: [OGD](#); [OGD-SMD](#)**Weblinks**

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

| | |
|------------------------------|----------------------------|
| Fuse-Link | 6.3 x 32mm |
| Rated Power Acceptance IEC | 4W / 10A @ Ta 23°C |
| Admissible Ambient Air Temp. | -40°C to 85°C |
| Material: Cover | Thermoplastic UL 94V-0 |
| Storage Conditions | 0°C to 60°C, max. 70% r.h. |

| | |
|------------------------------|---|
| Soldering Methods | Reflow, Wave |
| Solderability | 245°C / 3sec acc. to IEC 60068-2-20, Test Td |
| Resistance to Soldering Heat | 260°C / 10sec acc. to IEC 60068-2-20, Test Td |

Dimensions**Variants**

| Description | Order Number |
|--------------|--------------|
| Reflow-Cover | 0853.0917 |

Packaging Unit

Bulk (100 pcs.)