

Clip, 5 x 20 mm, Version 1



250 VAC

**Description**

- Through hole mounting

Weblinks

pdf-datasheet, html-datasheet, General Product Information, Approvals, RoHS, CHINA-RoHS, e-Shop, SCHURTER-Stock-Check, Distributor-Stock-Check, Detailed request for product


Technical Data

| | |
|------------------------------|-------------------------------|
| Fuse-Link | 5 x 20 mm |
| Mounting | PCB |
| Terminal | Solder THT |
| Rated Voltage | 250 VAC |
| Rated Current | 6.3 A |
| Degree of Protection | IP 00 |
| Admissible Ambient Air Temp. | -40 °C to 90 °C |
| Climatic Category | 40/090/21 acc. to IEC 60068-1 |
| Material: Terminals | see variants |
| Unit Weight (Socket/Cap) | 0.32 g |
| Storage Conditions | 0 °C to 60 °C, max. 70% r.h. |
| Product Marking | none |

| | |
|------------------------------|--|
| Soldering Methods | Wave |
| Solderability | 235 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1 |
| Resistance to Soldering Heat | 260 °C / 10 sec acc. to IEC 60068-2-20, Test Tb, method 1A |
| Contact Resistance | < 10 mΩ at 20 mV |

Dimensions

26.5 mm

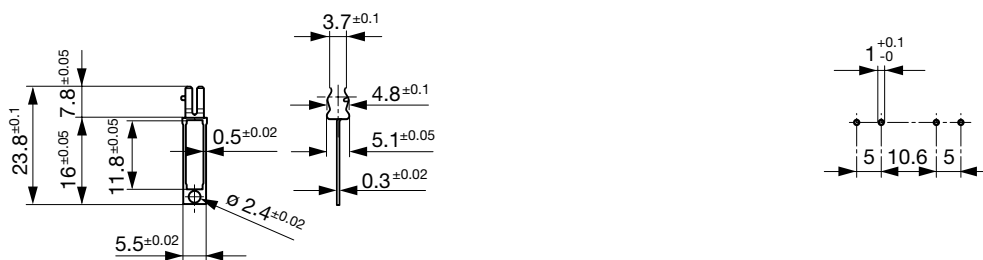

Drilling diagram

Variants

| Clip | Terminal | Material: Terminals | Order Number |
|------|----------|----------------------|--------------|
| • | Straight | Silver-Plated Bronze | 0752.1242 |
| • | Straight | Nickel-Plated Brass | 0752.1243 |

Packaging Unit Taped reeled (1000 pcs.)